


VALVOSIDER

MANUFACTURER OF VALVES

GATE VALVES GLOBE VALVES CHECK VALVES STRAINERS CATALOGUE

ASME

DIN

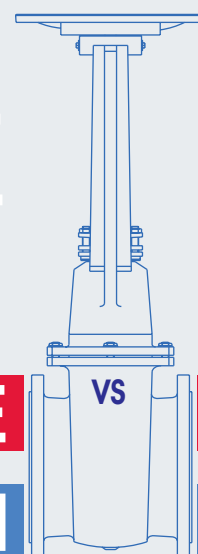

VALVOSIDER s.r.l.

Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy

Phone: +39 0163 22991 - Fax: +39 0163 21537

e-mail: valvo@valvosider.com - <http://www.valvosider.com>



main location in Borgosesia town



second location in Borgosesia
loc. Baraggione
- storage
- gamma-ray bunker for
radiographic tests

1 The Company

p. 4

ASME


2 Gate valves

p. 7




3 Globe valves

p. 19




4 Check valves

p. 37



5 Strainers


p. 53



DIN


6 Gate valves

p. 59




7 Globe valves

p. 71




8 Check valves

p. 91



9 Strainers

p.109



10 Technical data

p.115



PLANT LOCATION

Valvosider is located in Borgosesia, Northern Italy, between Milan and Turin, approximately one hour driving from both towns.

The international airport of Milano Malpensa is 45 minutes driving far from Borgosesia.

The nearest port is Genoa, some 150 kms from Borgosesia.

The total plant area is approximately 96,000 square metres with 20,500 square metres being under cover.

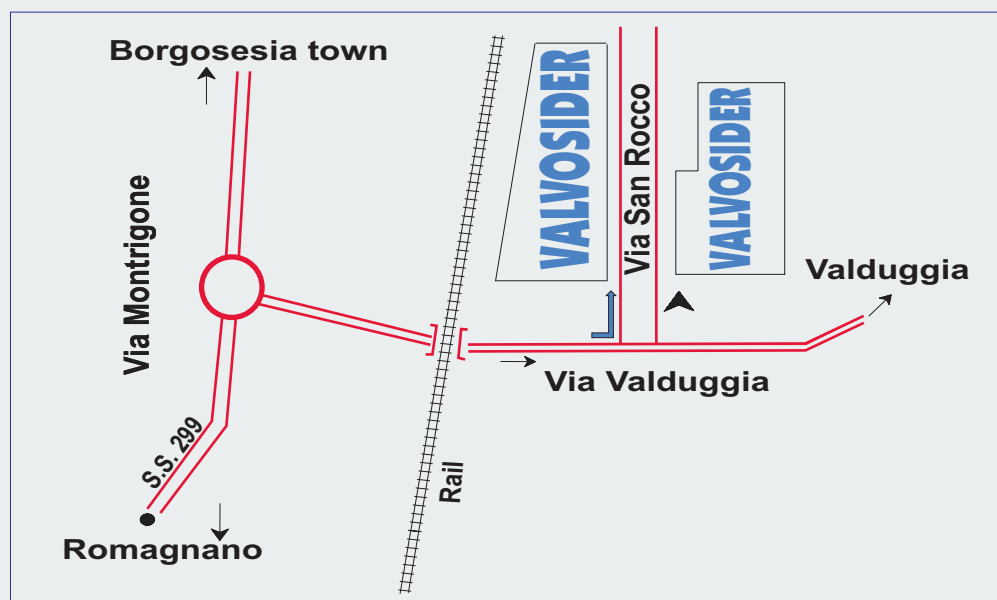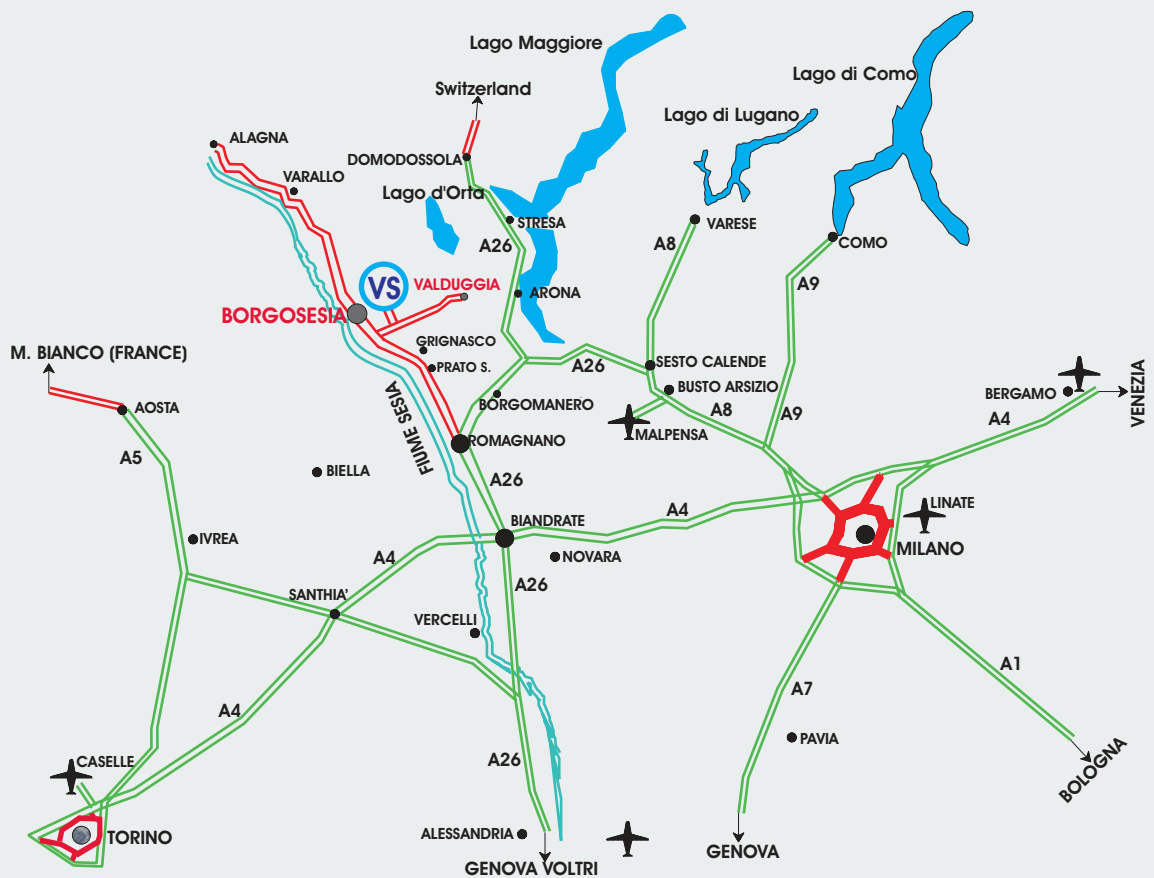

VALVOSIDER'S HISTORY



Valvosider was formed in 1951 as a manufacturer of valves operating on oil & gas, petrochemical and chemical industries as well as on power-stations plants.

After more than 50 years of continuous growth, Valvosider has become a "VALVE MANUFACTURER" of international reputation.

Our many years of experience in producing top quality products, together with our policy of keeping our production facilities at the forefront of available technology, has enabled us to be certified by the following organizations:

ISO 9001 IQNET® - CISQ / RINA (1992)
API 6D-0166 AMERICAN PETROLEUM INSTITUTE (1993)
HP 0 TÜV (1991)
M0809V STOOMWEZEN (1995)
API QUALITY REGISTRAR No. 0072 (1999)
AD 2000 -A4 (TRB 801 Nr. 45 TÜV -1997)
TA-LUFT (Low emission TÜV approval, 1999)
CE PED (2001- Certificate No. DGR-0036-QS-111-01)
GOST R SYSTEM CERTIFICATION (2001)

COMPANY'S POLICY

Valvosider S.r.l. is committed to provide its customers a product which conforms in every aspect: both to the requirements of the contract and the customer needs at a fair cost, within the contractual delivery time, with the highest possible safety standards, while at the same time protecting the well-being of the natural environment and the community where the materials are being produced.

To accomplish this goal the General Management has set up a Quality System which operates in conformity with ISO 9001 standards.

This system has been designed in such a way so that it may be modified and improved at any stage of the production cycle, whilst also ensuring the professional and technical development of our staff.

The Managing Director has the ultimate responsibility for the development and implementation of the Quality System.


This responsibility has been delegated to the Quality Manager, who has full authority and autonomy to develop and maintain the Quality System.





The Managing Director requires that all members of the company comply with the procedures laid down in the Quality System Manual.

All management levels are responsible for ensuring that the requirements of the Quality System Manual are both understood and observed.

All employees engaged in the manufacture of goods in Valvosider's name are responsible for producing a quality product that meets the customer specified requirements.


DESCRIPTION OF A TYPICAL GATE VALVE

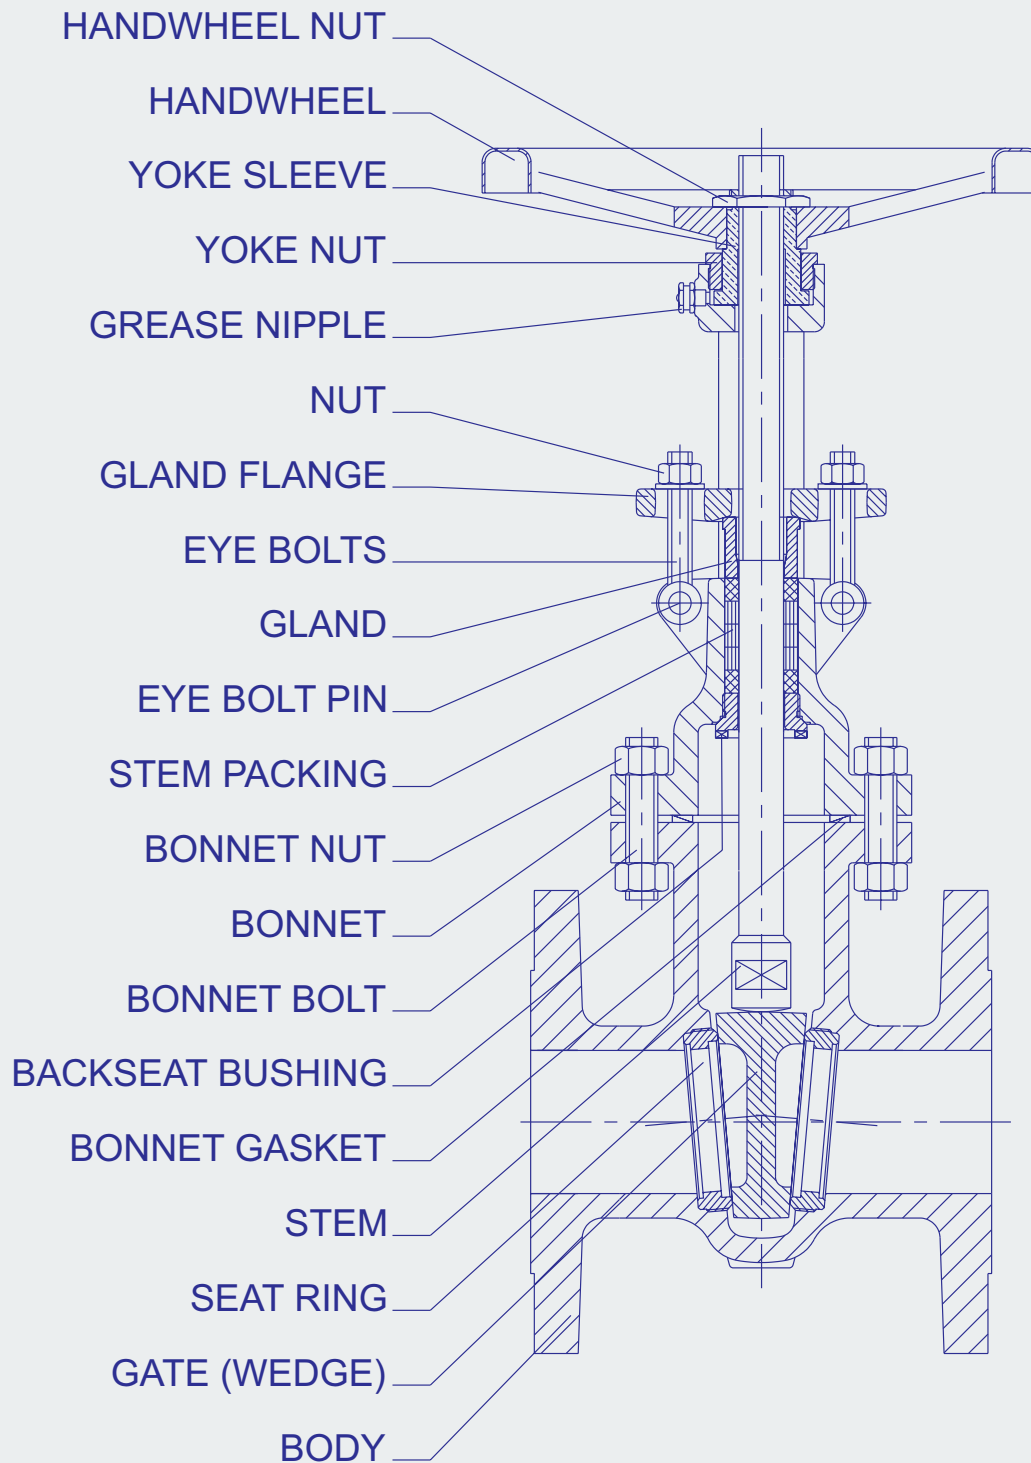

	TYPE	CLASS	SIZES	FIG. N
	GATE VALVES BOLTED BONNET	150	2" - 48"	450
		300	2" - 48"	451
		600	2" - 40"	452
		900	2" - 24"	453
		1500	2" - 24"	454
		2500	2" - 12"	455
page 8				
	GATE VALVES CRYOGENIC EXTENDED BONNET	150	2" - 40"	450EB
		300	2" - 40"	451EB
		600	2" - 24"	452EB
		900	2" - 24"	453EB
		1500	2" - 24"	454EB
page 10				
	GATE VALVES BELLOW SEAL	150	2" - 24"	450SO
		300	2" - 24"	451SO
		600	2" - 24"	452SO
		900	2" - 16"	453SO
		1500	2" - 16"	454SO
page 12				
	GATE VALVES PRESSURE SEAL	600	2" - 24"	P52
		900	2" - 24"	P53
		1500	2" - 24"	P54
		2500	2" - 24"	P55
page 14				
	GATE VALVES THROUGH CONDUIT	150	3" - 40"	T50
		300	3" - 40"	T51
		600	3" - 40"	T52
		900	3" - 24"	T53
		1500	3" - 24"	T54
page 16				

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- **Design** API 600
BS 1414
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5 FROM 2" TO 24"
ASME B16.47 FROM 26"
BW TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

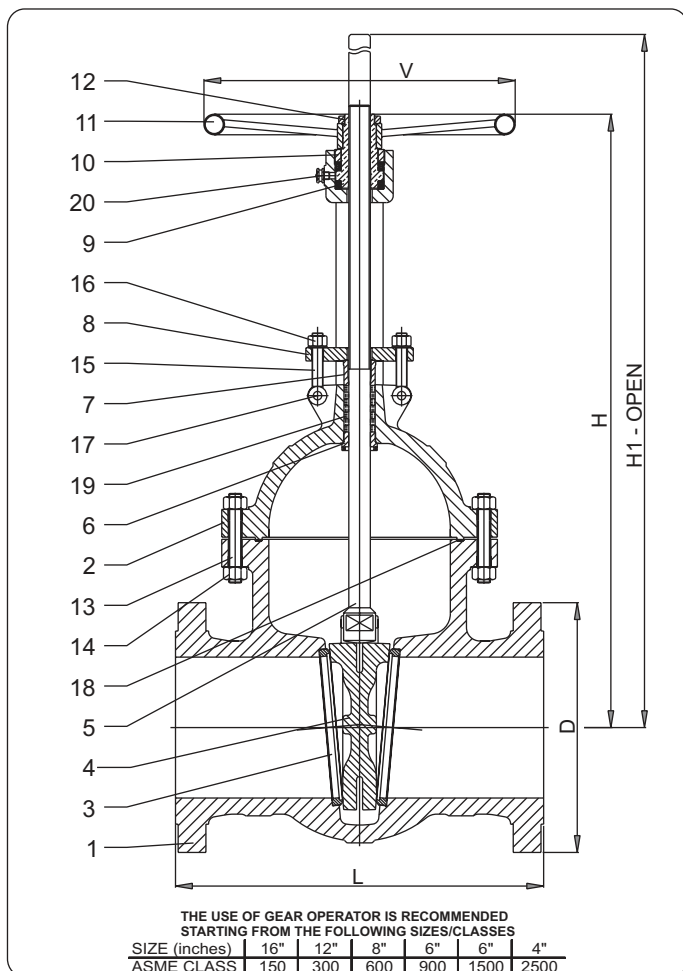

PART NAME	W45x	L45x	M45x	C45x	B45x	E45x	D45x	F45x	H45x
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Wedge seat surfaces	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
7 Gland	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Yoke nut	A105	A350 LF2	A105	A105	A105	F316	F316	F316	F316
11 Handwheel			← Steel →						
12 Handwheel nut			← A105 →						
13 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
14 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
15 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
16 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
17 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
18 Gasket (5)	ANSI 150: S.S. reinforced graphite - ANSI 300-600-900-1500: S.S. Spiral wound reinf. graphite/RTJ - ANSI 2500: RTJ								
19 Packing			← Graphite rings & wiper rings (6) →						
20 Grease nipple			← A105 →						

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES

ASME 150 - 300 - 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 450 - GATE VALVES OVAL BODY ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF	178	191	203	229	254	267	292	330	356	381	406	432	457	508	610	610	660	711	711	762	787	864
L BW	216	241	282	305	381	403	419	457	502	571	610	660	711	813	914	914	965	1016	1016	1168	1397	1270
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	927	984	1060	1111	1168	1289	1346	1511
V	200	200	225	250	250	300	400	500	500	600	600	700	700	800	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	350	420	440	480	560	600	775	1050	1240	1300	1500	1650	1800	2200	2600	2600	2600	3000	3000	3200	3200	3500
H1	400	480	510	580	695	750	980	1300	1540	1650	1900	2100	2300	2800	3350	3400	3450	3900	3950	4200	4250	4500

FIG. N. 451 - GATE VALVES ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	216	241	282	305	381	403	419	457	502	762	838	914	991	1143	1346	1397	1524	1626	1727	1930	1981	2235
L RTJ	232	257	298	321	397	419	435	473	518	778	854	930	1010	1165	1371	1422	1552	1654	1755	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	1035	1092	1149	1207	1270	1238	1289	1467
V	200	200	225	250	300	400	500	500	600	600	700	700	800	900	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	400	430	500	530	620	730	910	1110	1240	1400	1580	1700	1900	2150	2530	3000	3000	3360	3360	3890	3890	4330
H1	450	490	580	630	745	880	1110	1360	1540	1750	1980	2150	2400	2750	3350	3850	3900	4300	3950	4950	5110	5280

FIG. N. 452 - GATE VALVES ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	1549	1651	1778	1930	2082	2286	--	--
L RTJ	295	333	359	435	511	562	663	791	841	892	994	1095	1200	1407	1562	1664	1794	1946	2099	--	--	--
D	165	191	210	273	330	356	420	508	559	603	686	743	813	940	1073	1130	1194	1245	1314	1321	--	--
V	200	250	250	400	400	500	600	700	700	800	900	1000	1600	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--
H	450	500	540	670	686	810	970	1155	1330	1480	1680	1826	1930	2160	2390	2880	2950	3030	3090	3620	--	--
H1	500	570	620	770	810	960	1170	1410	1630	1830	2100	2280	2450	2800	3137	3680	3803	3937	4050	4687	--	--

FIG. N. 453 - GATE VALVES ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	368	381	457	610	737	838	965	1029	1130	1219	1321	1549	--
L RTJ	371	384	460	613	740	841	968	1038	1140	1232	1334	1568	--
D	216	241	292	381	470	546	610	641	705	787	857	1041	--
V	250	300	400	600	650	700	900	1000	G.O.	G.O.	G.O.	G.O.	--
H	450	600	670	890	1114	1255	1439	1585	1639	1835	1970	2230	--
H1	500	680	770	1050	1320	1520	1750	1950	2050	2300	2500	2850	--

FIG. N. 454 - GATE VALVES ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943	--
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972	--
D	216	267	311	394	483	584	673	749	826	914	984	1168	--
V	250	400	500	600	700	900	1600	1600	G.O.	G.O.	G.O.	G.O.	--
H	450	620	760	930	1148	1336	1454	1645	1815	1835	1970	2230	--
H1	500	700	870	1090	1360	1520	1750	1950	2050	2300	2500	2850	--

FIG. N. 455 - GATE VALVES ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	451	578	673	914	1022	1270	1422	--	--	--	--	--	--
L RTJ	454	584	683	927	1038	1292	1445	--	--	--	--	--	--
D	235	305	356	483	552	673	762	--	--	--	--	--	--
V	250	400	500	600	700	G.O.	G.O.	--	--	--	--	--	--
H	450	620	760	930	1148	1255	1439	--	--	--	--	--	--
H1	500	700	870	1090	1360	1520	1750	--	--	--	--	--	--

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

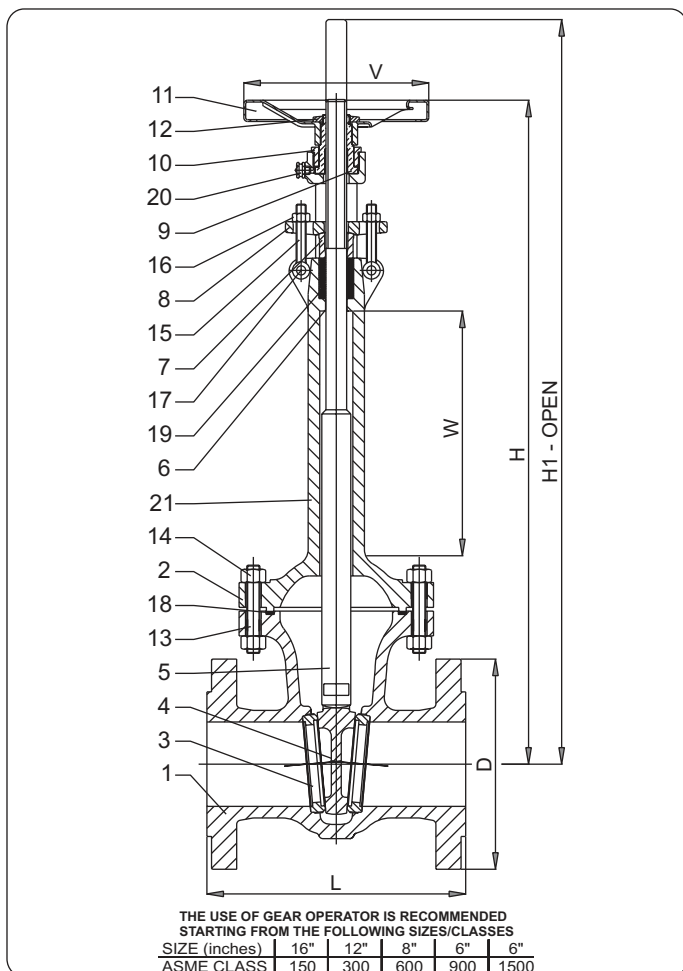





standard features

- **Description** EXTENDED BONNET
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- **Design** API 600
BS 1414
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5 FROM 2" TO 24"
ASME B16.47 FROM 26"
BW TO ANSI B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	E45xEB	F45xEB
1 Body	CF8	CF8M
2 Bonnet	CF8	CF8M
3 Seat ring surface	F316 (1)	F316 (1)
4 Wedge seat surfaces	F316 (2)	F316 (2)
5 Stem	F316 (3)	F316 (3)
6 Back seat (integral)	CF8 (2)	CF8M (2)
7 Gland	F316 (3)	F316 (3)
8 Gland flange	F316	F316
9 Yoke sleeve	B148 9A (4)	B148 9A (4)
10 Yoke nut	F316	F316
11 Handwheel	Steel	Steel
12 Handwheel nut	A105	A105
13 Bolts	B8	B8
14 Nuts	G8	G8
15 Eye bolts	B8	B8
16 Nuts	G8	G8
17 Eye bolt pin	B8	B8
18 Gasket	PTFE (5)	PTFE (5)
19 Packing	PTFE (6)	PTFE (6)
20 Grease nipple	F316	F316
21 Extension	F304L	F316L

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

options



- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: Graphite - other materials
 (6) On request: Graphite - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

CRYOGENIC GATE VALVES

ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 450EB - CRYOGENIC GATE VALVES OVAL BODY ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"
L RF	178	191	203	229	254	267	292	330	356	381	406	432	457	508	610	610	660	711	711	762
L BW	216	241	282	305	381	403	419	457	502	571	610	660	711	813	914	914	965	1016	1016	1168
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	927	984	1060	1111	1168	1289
V	200	200	225	250	250	300	400	500	500	600	600	700	700	800	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
W	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--	--	--	--	--	--
H	550	620	730	770	860	900	1075	1390	1540	1600	1800	1950	2100	2500	--	--	--	--	--	--
H1	600	690	810	870	990	1050	1280	1650	1850	1950	2200	2550	2800	3400	--	--	--	--	--	--

FIG. N. 451EB - CRYOGENIC GATE VALVES ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"
L RF/BW	216	241	282	305	381	403	419	457	502	762	838	914	991	1143	1346	1397	1524	1626	1727	1930
L RTJ	232	257	298	321	397	419	435	473	518	778	854	930	1010	1165	1371	1422	1552	1654	1755	--
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	1035	1092	1149	1207	1270	1238
V	200	200	225	250	300	400	500	500	600	600	700	700	800	900	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
W	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--	--	--	--	--	--
H	600	630	800	830	920	1030	1210	1410	1540	1700	1880	2000	2200	2600	--	--	--	--	--	--
H1	650	700	880	930	1045	1180	1280	1660	1840	2050	2280	2150	2400	2750	--	--	--	--	--	--

FIG. N. 452EB - CRYOGENIC GATE VALVES ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF/BW	292	356	432	559	660	787	838	889	991	1092	1194	1397
L RTJ	295	359	435	562	663	791	841	892	994	1095	1200	1407
D	165	210	273	356	419	508	559	603	686	743	813	940
V	200	250	400	500	600	700	700	800	900	1000	1600	G.O.
W	200	300	300	300	300	300	300	300	300	300	300	300
H	640	840	850	1100	1260	1455	1620	1780	1980	2130	2230	2460
H1	700	920	950	1250	1460	1710	1930	2130	2400	2580	2730	3100

FIG. N. 453EB - CRYOGENIC GATE VALVES ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF/BW	368	381	457	610	737	838	965	1029	1130	1219	1321	1549
L RTJ	371	384	460	613	740	841	968	1038	1140	1232	1334	1568
D	216	241	292	381	470	546	610	641	705	787	857	1041
V	250	300	400	600	650	700	900	1000	G.O.	G.O.	G.O.	G.O.
W	200	300	300	300	300	300	300	300	300	300	300	300
H	650	900	970	1190	1414	1555	1739	1885	1939	2135	2270	2530
H1	700	980	1070	1350	1620	1820	2050	2250	2350	2600	2800	3150

FIG. N. 454EB - CRYOGENIC GATE VALVES ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF/BW	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972
D	216	267	311	394	483	584	673	749	826	914	984	1168
V	250	400	500	600	700	900	1600	1600	G.O.	G.O.	G.O.	G.O.
W	200	300	300	300	300	300	300	300	300	300	300	300
H	650	920	1060	1230	1448	1555	1739	1885	1939	2135	2270	2530
H1	700	1000	1170	1390	1660	1820	2050	2250	2350	2600	2800	3150

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

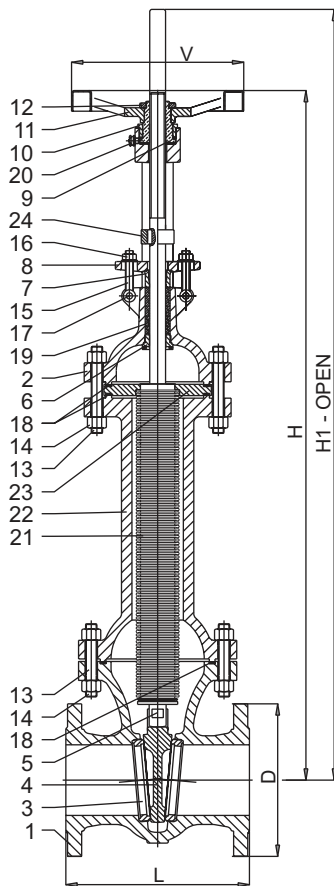

THE USE OF GEAR OPERATOR IS RECOMMENDED
STARTING FROM THE FOLLOWING SIZES/CLASSES

SIZE (inches)	16"	12"	8"	6"	6"
ASME CLASS	150	300	600	900	1500

standard features

- **Description** BELLOW SEAL
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- **Design** API 600
BS 1414
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW TO ANSI B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W45xSO	L45xSO	M45xSO	C45xSO	B45xSO	E45xSO	D45xSO	F45xSO	H45xSO
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Wedge seat surfaces	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
7 Gland	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Yoke nut	A105	A105	A105	A105	A105	F316	F316	F316	F316L
11 Handwheel	Steel								
12 Handwheel nut	A105								
13 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
14 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
15 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
16 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
17 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
18 Gasket	S.S. reinforced graphite (5)								
19 Packing	Graphite rings & wiper rings (6)								
20 Grease nipple	A105								
21 Bellow	A182 F321								
22 Extension	A105	LF2	F11	F5	F9	F304L	F347	F316L	F316L
23 Bellow flange	A182 F321								
24 No rot. Device	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES BELLOW SEAL ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 450SO - BELLOW GATE VALVES OVAL BODY ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF	178	191	203	229	254	267	292	330	356	381	406	432	457	508	---
L BW	216	241	282	305	381	403	419	457	502	571	610	660	711	813	---
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	---
V	200	200	225	250	250	300	400	500	500	600	600	700	700	800	---
H	610	675	820	940	1160	1530	1960	2350	2600	2980	3170	3550	4050	4650	---
H1	660	740	900	1040	1290	1680	2160	2600	2900	3350	3570	4000	4550	5250	---

FIG. N. 451SO - BELLOW GATE VALVES ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	216	241	282	305	381	403	419	457	502	762	838	914	991	1143	---
L RTJ	232	257	298	321	397	419	435	473	518	778	854	930	1010	1165	---
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	---
V	200	200	225	250	300	400	500	500	600	600	700	700	800	900	---
H	600	685	765	920	1070	1315	1700	2035	2395	2760	3135	3600	4080	4795	---
H1	650	750	840	1020	1200	1465	1900	2285	2700	3110	4535	4050	4580	5350	---

FIG. N. 452SO - BELLOW GATE VALVES ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF/BW	292	356	432	559	660	787	838	889	991	1092	1194	1397	---	---	---
L RTJ	295	359	435	562	663	791	841	892	994	1095	1200	1407	---	---	---
D	165	210	273	356	419	508	559	603	686	743	813	940	---	---	---
V	200	250	400	500	600	700	900	800	900	1000	1600	G.O.	---	---	---
H	640	805	905	1360	1720	2120	2500	---	---	---	---	---	---	---	---
H1	690	880	1010	1510	1920	2370	2800	---	---	---	---	---	---	---	---

FIG. N. 453SO - BELLOW GATE VALVES ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	381	457	610	737	838	965	1029	1130
L RTJ	371	384	460	613	740	841	968	1038	1140
D	216	241	292	381	470	546	610	641	705
V	250	300	400	600	650	700	900	1000	G.O.
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

FIG. N. 454SO - BELLOW GATE VALVES ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	470	546	705	832	991	1130	1257	1384
L RTJ	371	473	549	711	842	1000	1146	1276	1407
D	216	267	311	394	483	584	673	749	826
V	250	400	500	600	700	900	1600	1600	1600
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- PTFE SOFT SEATS
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** ROUND BODY
PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
WELDED IN SEATS
FLEXIBLE WEDGE
- **Design** API 600 STYLE A
ASME B16.34
API 600 STYLE B on demand
- **Face to face** ASME B16.10
- **Ends** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 - 3.1 B

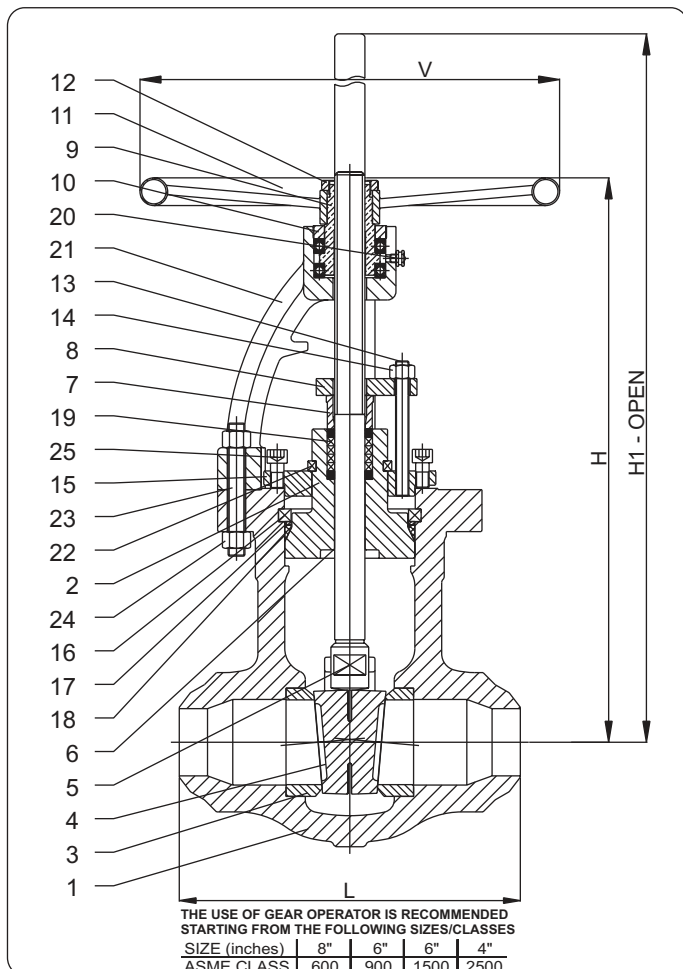

PART NAME	WP5x	IP5x	MP5x	WCP5x	FP5x
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Bonnet	WCB	WC1	WC6	WC9	CF8M
3 Seat - ring	A105 + HF (1)	F6A + HF (1)	F6A + HF (1)	F6A + HF (1)	F316 + HF (1)
4 Wedge seat surfaces	WCB + HF (1)	WC1 + HF (1)	WC6 + HF (1)	WC9 + HF (1)	CF8M + HF (1)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F316 (3)
6 Back seat (integral)			Stellite® (2)		
7 Gland	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F316 (3)
8 Gland flange	A105	F316	F316	F316	F316
9 Yoke sleeve			B148 9A (4)		
10 Yoke nut	A 105	A 105	A 105	A 105	F316
11 Handwheel			Steel		
12 Handwheel nut			A105		
13 Bolts	B7	B16	B16	B16	B8
14 Nuts	2H	G4	G4	G4	G8
15 Retainer flange	A 105	A 105	A 105	A 105	F316
16 Segmented retainer ring	F6A	F6A	F6A	F6A	F316
17 Spacer ring	F6A	F6A	F6A	F6A	F316
18 Gasket			S.S. Reinforced Graphite (5)		
19 Packing			Graphite rings & wiper rings		
20 Grease nipple			Steel		
21 Yoke	WCB	WC1	WC6	WC9	CF8M
22 Segmented support ring	F6	F6	F6	F6	F316
23 Yoke / body bolt	B7	B16	B16	B16	B8
24 Yoke / body nut	2H	G4	G4	G4	G8
25 Bolts	B7	B16	B16	B16	B8

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60
 (5) On request: Metal

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PRESSURE SEAL GATE VALVES ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P52 - PRESSURE SEAL GATE VALVES ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF	292	356	432	559	660	787	838	889	991	1092	1194	1397
L RTJ	295	359	435	562	663	791	841	892	994	1095	1200	1407
L BW	178	254	305	457	584	711	813	889	991	1092	1194	1397
V	200	250	400	500	600	700	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	500	550	590	840	970	1160	1300	1500	1780	2000	2150	2400
H1	550	630	690	990	1170	1410	1600	1850	2180	2450	2650	3000

FIG. N. P53 - PRESSURE SEAL GATE VALVES ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF	368	381	457	610	737	838	965	1029	1130	1219	1321	1549
L RTJ	371	384	460	613	740	841	968	1038	1140	1232	1334	1568
L BW	216	305	356	508	660	787	914	991	1092	1143	1245	1397
V	250	300	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	500	550	590	840	970	1250	1350	1580	1900	2050	2200	2500
H1	550	620	690	990	1170	1500	1650	1930	2300	2600	2700	3100

FIG. N. P54 - PRESSURE SEAL GATE VALVES ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972
L BW	216	305	406	559	711	864	991	1067	1194	1346	1473	1943
V	250	400	600	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	500	550	590	840	970	1250	1350	1780	2000	2200	2400	2600
H1	550	630	690	990	1170	1500	1700	2130	2400	2650	2900	3200

FIG. N. P55 - PRESSURE SEAL GATE VALVES ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L RF	451	578	673	914	1022	1270	1422	-	-	-	-	-
L RTJ	454	584	683	927	1038	1292	1445	-	-	-	-	-
L BW	279	368	457	610	762	914	1041	1118	1245	1397	1524	1676
V	300	500	700	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.
H	500	550	600	860	1000	1330	1480	1860	2090	2350	2650	2800
H1	550	630	690	1010	1200	1580	1780	2210	2490	2800	3150	3400

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC OR HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ PARALLEL WEDGE
- ☐ TWO PIECE BODY GUIDED WEDGE
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

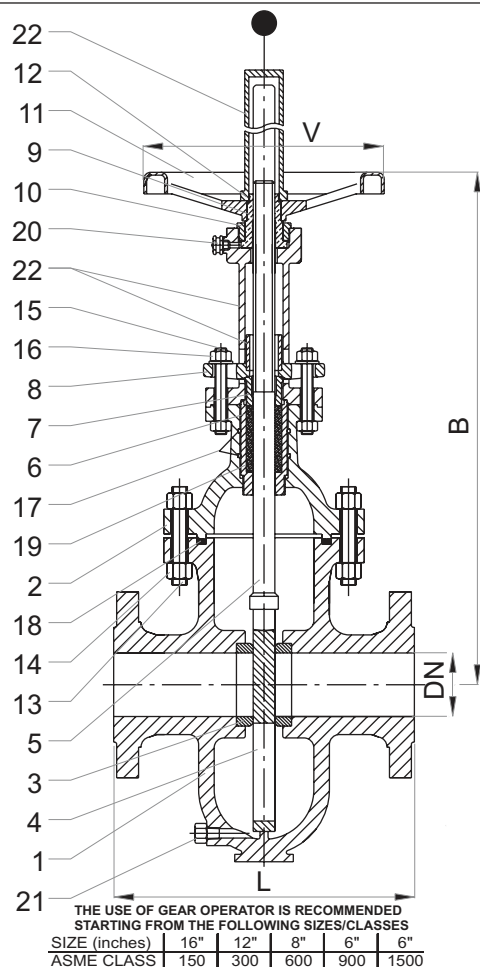

standard features

- **Description** ROUND OR FLAT BODY
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SOFT SEATS
PARALLEL SLAB GATE
- **Design** API 6 D
ASME B16.34
ASME B31.3
- **Face to face** API 6D
- **Flanges** ASME B16.5 FROM 2" TO 24"
ASME B16.47 FROM $\geq 26"$
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** API 6D
MSS-SP 25
CE - PED
- **Certificates** EN 10204 - 3.1 B


PART NAME	WT5x	LCT5x
1 Body	A216 WCB	A352 LCC
2 Bonnet	A216 WCB	A352 LCC
3 Seat ring surface	A105 (1)	A350 LF2 (1)
4 Gate seat surfaces	A516 Gr70(2)	A537 CL1 (2)
5 Stem	AISI 410 (3)	AISI 410 (3)
6 Stuffing box	A105 (3)	A350 LF2 (3)
7 Gland	A105 (3)	A350 LF2 (3)
8 Gland flange	A105	A350 LF2
9 Yoke sleeve	B148 9A (4)	B148 9A (4)
10 Yoke nut	A105	A105
11 Handwheel	Steel	Steel
12 Handwheel nut	A105	A105
13 Bolts	B7	L7
14 Nuts	2H	G4
15 Eye bolts	B7	L7
16 Nuts	2H	G4
17 O rings	BUNA	BUNA / VITON
18 Gasket	BUNA (5)	BUNA / VITON (5)
19 Packing	VITON (6)	VITON (6)
20 Grease nipple	A105	A105
21 Plug	A105	A350 LF2
22 Stem protection	A105	A105

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: Graphite - other materials
 (6) On request: Graphite - other materials

All data, subject to technical changes, are only for information and not for official use.

seat detail

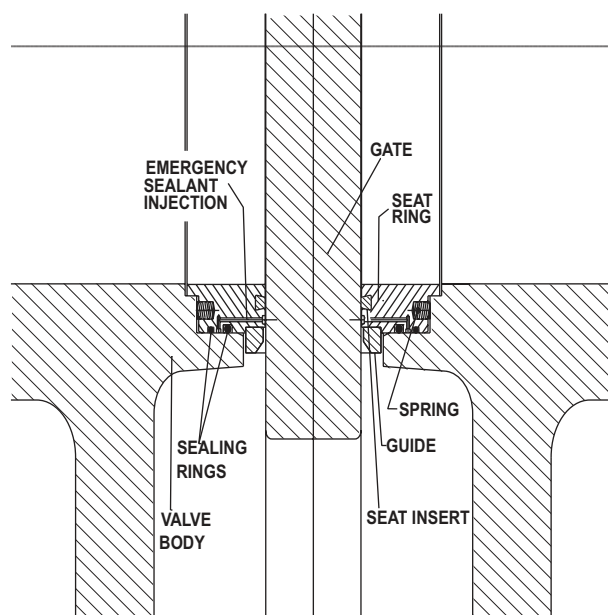

ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES - THROUGH CONDUIT ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. T50 - THROUGH CONDUIT GATE VALVES OVAL BODY ASME CLASS 150

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"	32"	34"	36"	40"	42"	48"
L RF	203	229	267	292	330	356	381	406	432	457	508	508	559	610	650	711	762	800	914	--	--
L BW	282	305	403	419	457	502	572	610	660	711	762	813	864	914	914	965	1016	1016	1118	--	--
DN	76	102	152	203	254	305	337	387	439	489	540	591	635	686	737	782	831	876	927	--	--
V	300	300	300	450	600	600	600	600	600	800	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--
A	215	270	345	433	520	584	630	722	785	860	974	1050	1160	1210	1295	1360	1480	1540	1700	--	--
B	505	530	665	820	975	1100	1190	1345	1480	1610	1800	1880	2110	2190	2330	2530	2660	2800	3160	--	--

FIG. N. T51 - THROUGH CONDUIT GATE VALVES ASME CLASS 300

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	282	305	403	419	457	502	762	838	914	991	1092	1143	1245	1346	1397	1524	1626	1727	1930	--	--
L RTJ	298	321	419	435	473	518	778	854	930	1010	1114	1165	1270	1372	1422	1552	1654	1755	--	--	--
DN	76	102	152	203	254	305	337	389	439	489	540	591	635	686	737	782	831	876	978	--	--
V	300	300	300	300	600	600	600	800	800	1100	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--
A	260	299	355	430	507	580	661	747	817	897	982	1037	1142	1252	1335	1395	1490	1570	1700	--	--
B	490	533	655	920	980	1110	1200	1360	1480	1650	1810	1930	2160	2230	2400	2570	2710	2820	3200	--	--

FIG. N. T52 - THROUGH CONDUIT GATE VALVES ASME CLASS 600

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	356	432	559	660	787	838	889	991	1092	1194	1295	1397	1448	1549	1651	1778	1930	2083	2286	--	--
L RTJ	359	435	562	663	791	841	892	994	1095	1200	1305	1407	1461	1562	1664	1794	1946	2099	--	--	--
DN	76	102	152	203	254	305	337	389	439	489	540	591	635	686	737	782	831	876	978	--	--
V	300	300	300	300	600	600	600	800	800	1100	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--
A	212	307	405	435	510	590	630	725	810	930	995	1085	1170	1280	1350	1400	1490	1580	1710	--	--
B	485	530	690	860	980	1160	1200	1375	1500	1700	1900	2100	2200	2300	2400	2650	2750	2900	3200	--	--

FIG. N. T53 - THROUGH CONDUIT GATE VALVES ASME CLASS 900

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"
L RF/BW	381	457	610	737	838	965	1029	1130	1219	1321	--	1549	--
L RTJ	384	460	613	740	841	968	1038	1140	1232	1334	--	1568	--
DN	76	102	152	203	254	305	337	389	439	489	540	591	--
V	300	300	300	300	600	600	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
A	207	252	337	422	514	590	637	727	917	987	--	1212	--
B	515	541	660	850	998	1200	1300	1400	1600	1800	--	2100	--

FIG. N. T54 - THROUGH CONDUIT GATE VALVES ASME CLASS 1500

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"
L RF/BW	470	546	705	832	991	1130	1257	1384	1537	1664	--	1943	--
L RTJ	500	549	711	841	1000	1146	1276	1407	1559	1686	--	1972	--
DN	76	102	152	203	254	305	337	389	439	489	540	591	--
V	300	300	300	300	600	600	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
A	254	271	357	437	520	532	661	747	817	897	--	1037	--
B	588	661	715	860	1010	1200	1400	1500	1600	1800	--	2200	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ SECONDARY SEAL
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED









A.N.C.C.
I.S.P.E.S.L.
NOTIFIED




VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESCRIPTION OF A TYPICAL GLOBE VALVE

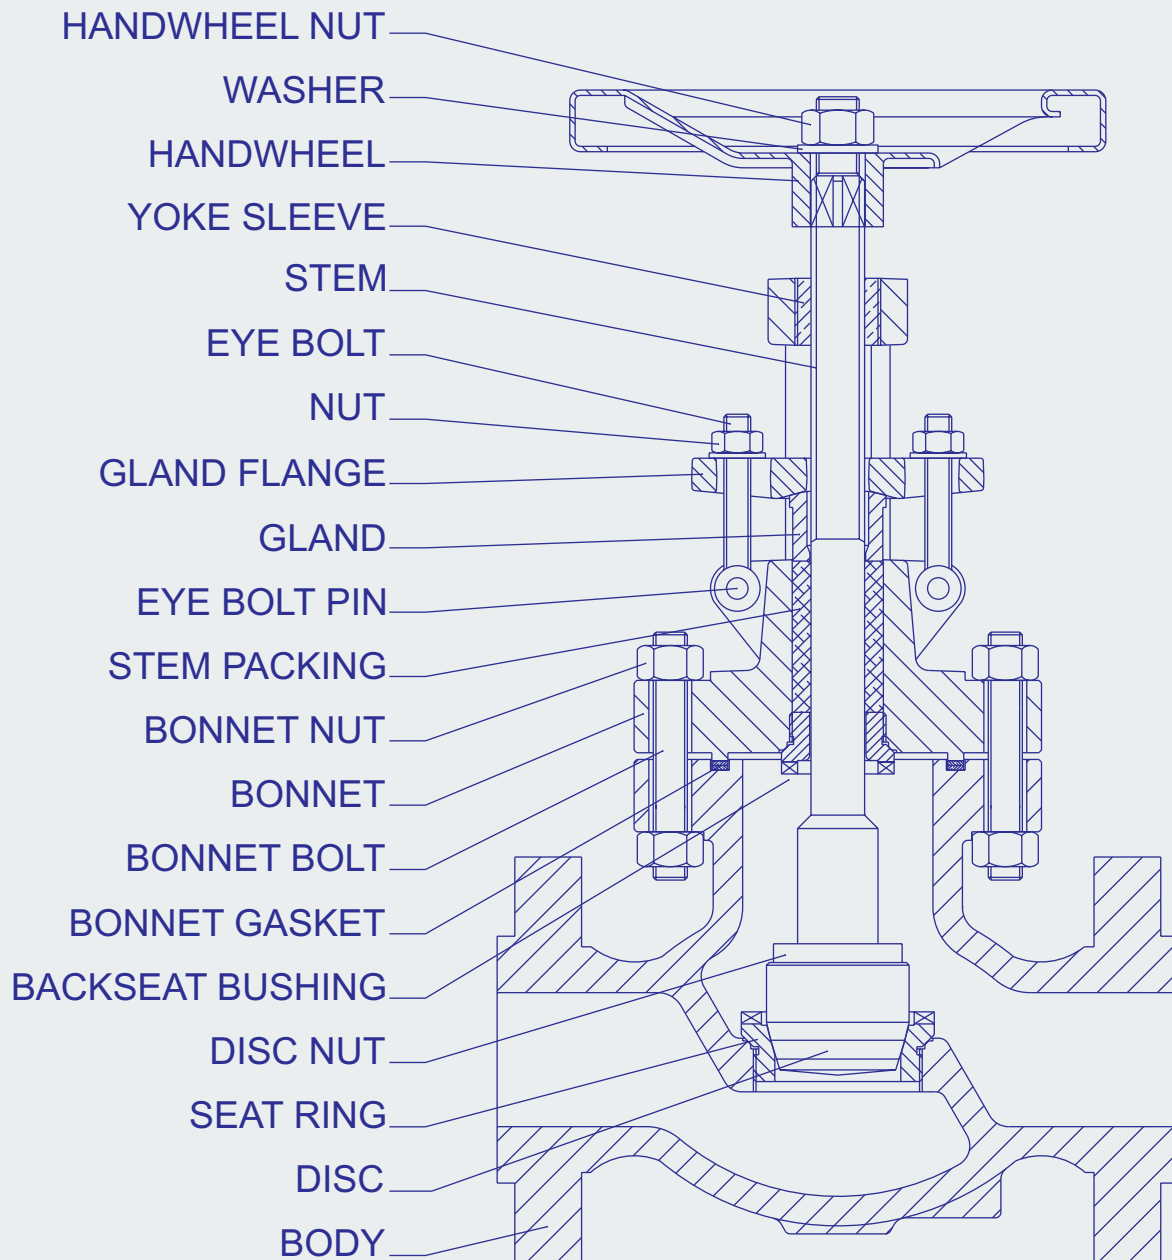

TYPE	CLASS	SIZES	FIG. N.	TYPE	CLASS	SIZES	FIG. N.
GLOBE VALVES 'Y' TYPE 	150	2" - 16"	460Y	GLOBE VALVES BOLTED BONNET 	150	2" - 16"	460
	300	2" - 16"	461Y		300	2" - 16"	461
	600	2" - 16"	462Y		600	2" - 16"	462
	900	2" - 12"	463Y		900	2" - 12"	463
	1500	2" - 12"	464Y		1500	2" - 12"	464
	page 22				page 20		
GLOBE VALVES ANGLE 90° 	150	2" - 16"	460A	GLOBE VALVES CRYOGENIC 	150	2" - 16"	460EB
	300	2" - 16"	461A		300	2" - 16"	461EB
	600	2" - 16"	462A		600	2" - 16"	462EB
	900	2" - 12"	463A		900	2" - 12"	463EB
	1500	2" - 12"	464A		1500	2" - 12"	464EB
	page 24				page 26		
GLOBE VALVES BELLOW SEAL 'Y' TYPE 	150	2" - 16"	460YSO	GLOBE VALVES BELLOW SEAL 	150	2" - 16"	460SO
	300	2" - 16"	461YSO		300	2" - 16"	461SO
	600	2" - 16"	462YSO		600	2" - 16"	462SO
	900	2" - 12"	463YSO		900	2" - 12"	463SO
	1500	2" - 12"	464YSO		1500	2" - 12"	464SO
	page 30				page 28		
GLOBE VALVES PRESSURE SEAL 'Y' TYPE 	600	2" - 16"	P82	GLOBE VALVES PRESSURE SEAL 	600	2" - 16"	P62
	900	2" - 16"	P83		900	2" - 16"	P63
	1500	2" - 12"	P84		1500	2" - 12"	P64
	2500	2" - 12"	P85		2500	2" - 12"	P65
	page 34				page 32		

standard features

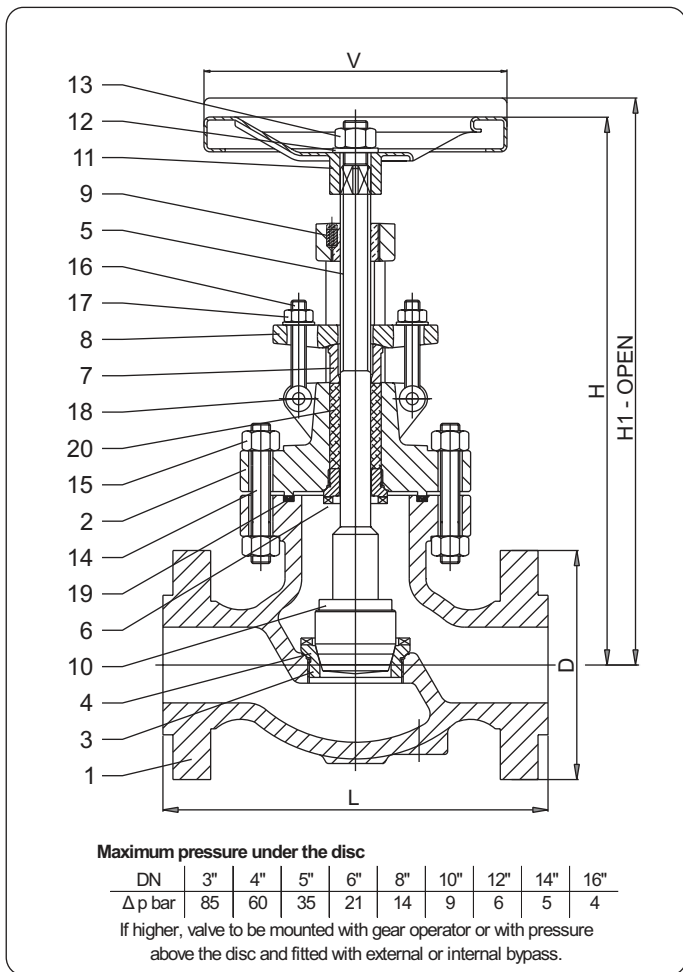

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
SWIVEL PLUG DISC
RENEWABLE SEATS
- **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W46x	L46x	M46x	C46x	B46x	E46x	D46x	F46x	H46x
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
7 Gland	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Disc nut	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
11 Handwheel					Steel				
12 Plate					A105				
13 Handwheel nut					A105				
14 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
15 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
16 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
17 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
18 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
19 Gasket						S.S spiral wound reinf. graphite / RTJ (5)			
20 Packing						Graphite rings & wiper rings (6)			

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60

(5) On request: PTFE - other materials

(6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES

ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460 - GLOBE VALVES ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	--	--	--	--
L RTJ	216	219	254	305	368	419	508	635	711	800	927	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400 *	600 *	600 *	800 *	1000 *	--	--	--	--
H	320	350	380	430	480	560	680	750	860	910	1240	--	--	--	--
H1	335	370	404	460	518	605	740	825	950	1025	1375	--	--	--	--

FIG. N. 461 - GLOBE VALVES ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	--	--	--	--
L RTJ	282	308	333	371	416	460	575	638	727	854	879	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400 *	500 *	600 *	600 *	800 *	1000 *	--	--	--	--
H	390	400	410	440	570	680	800	850	1010	1150	1380	--	--	--	--
H1	405	420	434	470	608	725	860	925	1100	1255	1515	--	--	--	--

FIG. N. 462 - GLOBE VALVES ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	--	--	--	--
L RTJ	295	333	359	435	511	562	663	790	841	892	994	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300 *	500 *	600 *	600 *	700 *	800 *	800 *	1000 *	--	--	--	--
H	350	515	545	600	686	780	840	1235	1311	1430	1670	--	--	--	--
H1	365	535	569	630	724	825	900	1310	1401	1552	1805	--	--	--	--

FIG. N. 463 - GLOBE VALVES ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
V	300	300	400 *	500 *	650 *	700 *	900 *	1000 *	1000 *
H	575	690	590	720	870	973	1140	1500	1680
H1	590	710	614	750	908	1018	1200	1575	1770

FIG. N. 464 - GLOBE VALVES ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
V	300 *	400 *	500 *	500 *	700 *	900 *	1000 *	1000 *	1000 *
H	575	690	770	840	902	973	1043	1670	1750
H1	590	710	794	870	940	1018	1103	1745	1860

* Gear operator recommended

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- DISC WITH PTFE INSERT
- PARABOLIC DISC
- STOP CHECK DISC
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
SWIVEL PLUG DISC
RENEWABLE SEATS
- **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

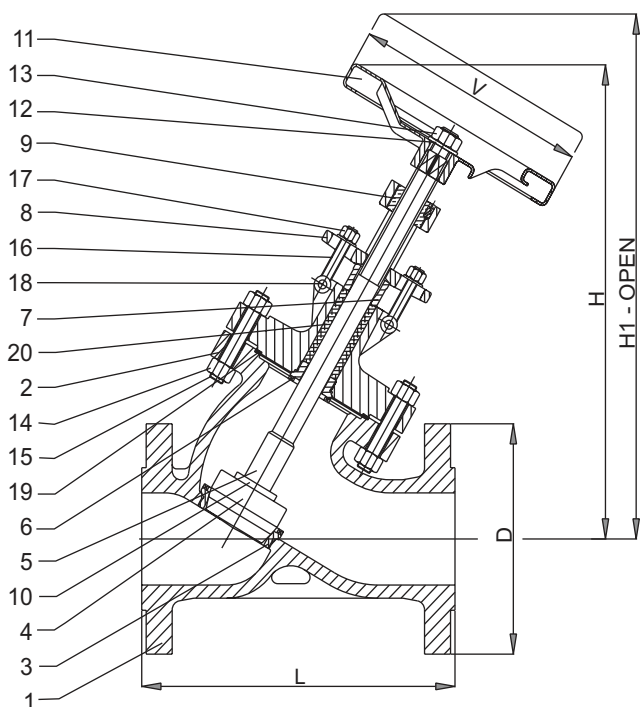

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	W46xY	L46xY	M46xY	C46xY	B46xY	E46xY	D46xY	F46xY	H46xY
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316
7 Gland	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Disc nut	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
11 Handwheel					Steel				
12 Plate					A105				
13 Handwheel nut					A105				B8
14 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
15 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
16 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
17 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
18 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
19 Gasket (5)					S.S. spiral wound reinf. graphite / RTJ (5)				
20 Packing (6)					Graphite rings & wiper rings (6)				

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - 'Y' TYPE **ASME 150 - 300 - 600 - 900 - 1500**

VALVOSIDER
 MANUFACTURER OF VALVES

FIG. N. 460Y - GLOBE VALVES - 'Y' TYPE ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	--	--	--	--
L RTJ	216	219	254	305	368	419	508	635	711	800	927	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400 *	500 *	500 *	800 *	800 *	--	--	--	--
H	320	350	380	440	480	560	680	750	860	930	1250	--	--	--	--
H1	380	430	470	550	615	720	890	1010	1170	1040	1380	--	--	--	--

FIG. N. 461Y - GLOBE VALVES - 'Y' TYPE ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	--	--	--	--
L RTJ	282	308	333	371	416	460	575	638	727	854	879	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400 *	500 *	600 *	800 *	1000 *	1000 *	--	--	--	--
H	390	400	410	430	570	680	800	850	1010	1150	1390	--	--	--	--
H1	410	420	435	520	615	735	860	930	1110	1270	1512	--	--	--	--

FIG. N. 462Y - GLOBE VALVES - 'Y' TYPE ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	--	--	--	--
L RTJ	295	333	359	435	511	562	663	790	841	892	994	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300 *	500 *	600 *	600 *	900 *	1000 *	1000 *	1000 *	--	--	--	--
H	350	515	545	600	686	780	840	1235	1311	1430	1660	--	--	--	--
H1	370	535	570	630	726	830	910	1315	1411	1550	1800	--	--	--	--

FIG. N. 463Y - GLOBE VALVES - 'Y' TYPE ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
V	250	250	350 *	500 *	650 *	700 *	900 *	1000 *	1000 *
H	575	690	590	720	870	973	1140	1500	1680
H1	605	730	634	780	928	1045	1230	1615	1810

FIG. N. 464Y - GLOBE VALVES - 'Y' TYPE ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
V	250 *	250 *	400 *	500 *	700 *	900 *	1000 *	1000 *	1000 *
H	575	690	770	840	902	973	1043	1670	1750
H1	615	740	826	915	980	1080	1190	1760	1855

* Gear operator recommended

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- DISC WITH PTFE INSERT
- PARABOLIC DISC
- STOP CHECK DISC
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
 CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
 NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

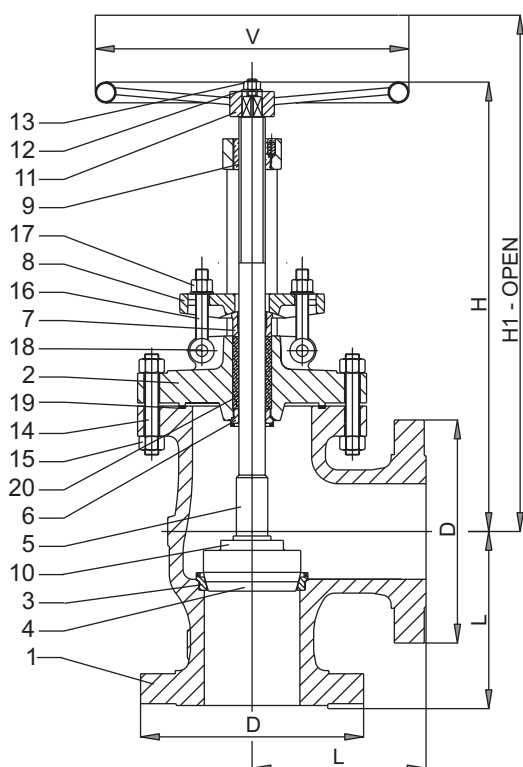

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
SWIVEL PLUG DISC
RENEWABLE SEATS
- **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W46xA	L46xA	M46xA	C46xA	B46xA	E46xA	D46xA	F46xA	H46xA
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
7 Gland	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Disc nut	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
11 Handwheel					Steel				
12 Plate					A105				
13 Handwheel nut					A105				
14 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
15 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
16 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
17 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
18 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
19 Gasket					S.S. spiral wound reinf. graphite / RTJ (5)				
20 Packing					Graphite rings & wiper rings (6)				

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60

(5) On request: PTFE - other materials

(6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - ANGLE TYPE

ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460A - GLOBE VALVES - ANGLE TYPE ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	102	108	121	146	178	203	248	311	349	394	457	--	--	--	--
L RTJ	114	121	133	159	191	216	260	324	362	406	470	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400 *	500 *	500 *	800 *	800 *	--	--	--	--
H	384	420	456	516	576	672	816	900	1032	1092	1488	--	--	--	--
H1	399	440	480	546	614	717	876	975	1122	1197	1608	--	--	--	--

FIG. N. 461A - GLOBE VALVES - ANGLE TYPE ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	133	146	159	178	200	222	279	311	356	(419)	(432)	--	--	--	--
L RTJ	149	162	174	194	216	238	287	327	371	(427)	(440)	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400 *	500 *	600 *	800 *	1000 *	1000 *	--	--	--	--
H	468	480	492	528	684	816	960	1020	1212	1380	1656	--	--	--	--
H1	483	500	516	558	722	861	1020	1095	1302	1485	1776	--	--	--	--

FIG. N. 462A - GLOBE VALVES - ANGLE TYPE ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	146	165	178	216	254	279	330	394	419	(444)	(496)	--	--	--	--
L RTJ	149	168	181	219	257	282	333	397	422	(496)	(497)	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300*	500*	600*	600*	900*	1000*	1000*	1000*	--	--	--	--
H	420	618	654	720	823	936	1008	1482	1573	1716	2004	--	--	--	--
H1	435	638	678	750	861	981	1068	1557	1663	1821	2124	--	--	--	--

FIG. N. 463A - GLOBE VALVES - ANGLE TYPE ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	184	210	191	229	279	305	368	419	483
L RTJ	187	213	194	232	282	308	371	422	486
D	216	244	241	292	349	381	470	546	610
V	250	250	350*	500*	650*	700*	900*	1000*	1000*
H	690	828	708	864	1044	1168	1368	1800	2016
H1	705	848	732	894	1082	1213	1428	1875	2106

FIG. N. 464A - GLOBE VALVES - ANGLE TYPE ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	216	254	305	406	483	559	711	864	991
L RTJ	219	257	308	409	486	565	721	873	1006
D	216	244	267	311	375	394	483	584	673
V	250*	250*	400*	500*	700*	900*	1000*	1000*	1000*
H	690	828	924	1008	1082	1168	1252	2004	2100
H1	705	848	948	1038	1120	1213	1312	2079	2190

* Gear operator recommended

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- DISC WITH PTFE INSERT
- PARABOLIC DISC
- STOP CHECK DISC
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

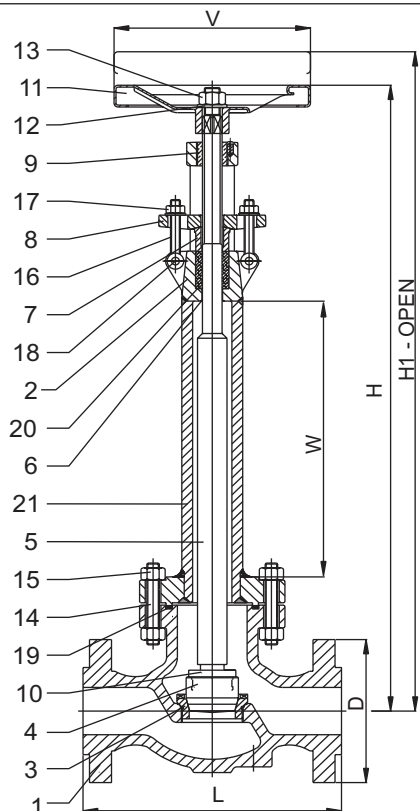

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

standard features

- **Description** BOLTED BONNET
EXTENDED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
SWIVEL PLUG DISC
RENEWABLE SEATS
- **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- **Face to face** ASME B16.10
- **Ends** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B


PART NAME	E46xEB	F46xEB
1 Body	CF8	CF8M
2 Bonnet	CF8	CF8M
3 Seat ring surface	F316 (1)	F316 (1)
4 Disc seat surface	F316 (2)	F316 (2)
5 Stem	F316 (3)	F316 (3)
6 Back seat (integral)	CF8	CF8M
7 Gland	F316	F316
8 Gland flange	F316	F316
9 Yoke sleeve	B148 9A (4)	B148 9A (4)
10 Disc nut	F316	F316
11 Handwheel	Steel	Steel
12 Plate	A105	A105
13 Handwheel nut	A105	A105
14 Bolts	B8	B8
15 Nuts	G8	G8
16 Eye bolts	B8	B8
17 Nuts	G8	G8
18 Eye bolt pin	B8	B8
19 Gasket	PTFE (5)	PTFE (5)
20 Packing	PTFE (6)	PTFE (6)
21 Extension	F316L	F316L

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials


- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.

options

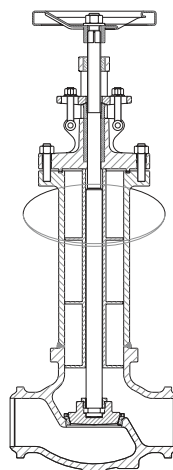

FULLY EXTRACTABLE

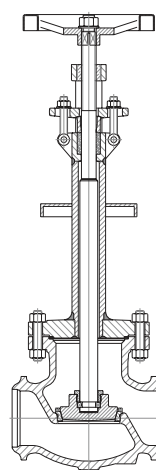

COLD BOX



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - CRYOGENIC

ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460EB - CRYOGENIC GLOBE VALVES ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	--	--	--	--
L RTJ	216	219	254	305	368	419	508	635	711	800	927	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400 *	500 *	500 *	800 *	800 *	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	--	--	--	--
H	520	550	680	740	780	860	980	1050	1160	1240	1320	--	--	--	--
H1	535	570	704	770	818	905	1040	1125	1250	1360	1490	--	--	--	--

FIG. N. 461EB - CRYOGENIC GLOBE VALVES ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	--	--	--	--
L RTJ	282	308	333	371	416	460	575	638	727	854	879	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400 *	500 *	600 *	800 *	1000 *	1000 *	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	--	--	--	--
H	590	600	710	730	870	980	1100	1150	1310	1450	1530	--	--	--	--
H1	605	620	734	760	908	1025	1160	1225	1400	1555	1660	--	--	--	--

FIG. N. 462EB - CRYOGENIC GLOBE VALVES ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	--	--	--	--
L RTJ	295	333	359	435	511	562	663	790	841	892	994	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300 *	500 *	600 *	600 *	900 *	1000 *	1000 *	1000 *	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	--	--	--	--
H	550	715	845	900	986	1080	1140	1535	1611	1700	1820	--	--	--	--
H1	565	735	869	930	1024	1125	1200	1610	1701	1800	1930	--	--	--	--

FIG. N. 463EB - CRYOGENIC GLOBE VALVES ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
V	250	250	350 *	500 *	650 *	700 *	900 *	1000 *	1000 *
W	200	200	300	300	300	300	300	300	300
H	775	890	890	1020	1170	1273	1440	1800	1980
H1	790	910	914	1050	1208	1318	1500	1875	2070

FIG. N. 464EB - CRYOGENIC GLOBE VALVES ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
V	250 *	250 *	400 *	500 *	700 *	900 *	1000 *	1000 *	1000 *
W	200	200	300	300	300	300	300	300	300
H	775	890	1070	1140	1202	1273	1343	1970	2050
H1	790	910	1094	1170	1240	1318	1403	2045	2160

* Gear operator recommended

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ DISC WITH PTFE INSERT
- ☐ PARABOLIC DISC
- ☐ STOP CHECK DISC
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- ☐ **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- ☐ **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- ☐ **Face to face** ASME B16.10
- ☐ **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- ☐ **Testing** API 598
API 6D
BS 6755
- ☐ **Rating** ASME B16.34
- ☐ **Marking** MSS-SP 25
CE - PED
- ☐ **Certificates** EN 10204 – 3.1 B

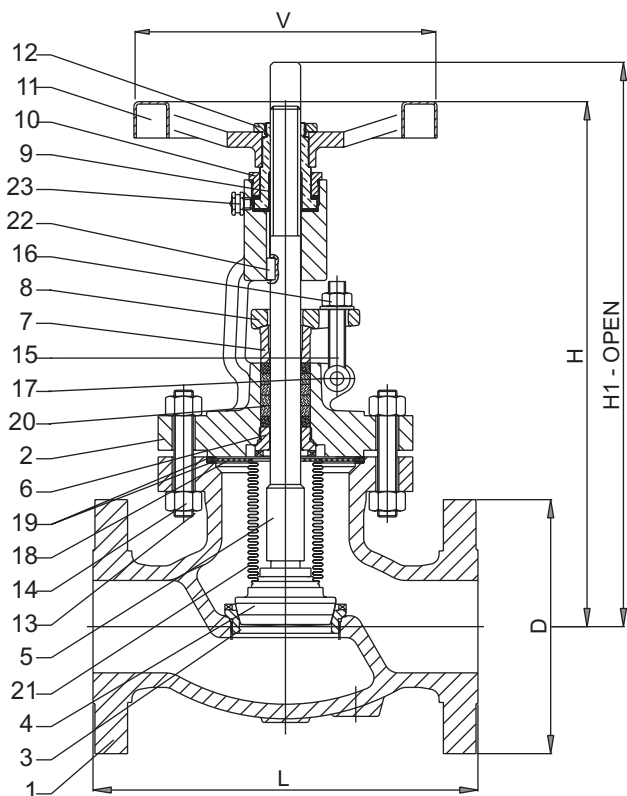

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	W46xSO	L46xSO	M46xSO	C46xSO	B46xSO	E46xSO	D46xSO	F46xSO	H46xSO
1 Body	W CB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	W CB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
7 Gland	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Yoke nut	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
11 Handwheel	Steel								
12 Handwheel nut	A105								
13 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
14 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
15 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
16 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
17 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
18 Bellow flange	A182 F321								
19 Gasket	S.S. spiral wound reinf. graphite / RTJ (5)								
20 Packing	Graphite rings & wiper rings (6)								
21 Bellow	A182 F321								
22 No rot. Device	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
23 Grease nipple	Steel								

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60

(5) On request: PTFE - other materials

(6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - BELLOW SEAL ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460SO - GLOBE VALVES BELLOW SEAL ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	--	--	--	--
L RTJ	216	219	254	305	368	419	508	635	711	800	927	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400*	500*	500*	800*	800*	--	--	--	--
H	340	370	400	440	500	580	700	800	900	970	1270	--	--	--	--
H1	355	390	424	470	538	625	760	875	990	1090	1410	--	--	--	--

FIG. N. 461SO - GLOBE VALVES BELLOW SEAL ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	--	--	--	--
L RTJ	282	308	333	371	416	460	575	638	727	854	879	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400*	500*	600*	800*	1000*	1000*	--	--	--	--
H	410	420	430	480	590	700	820	900	1050	1200	1440	--	--	--	--
H1	425	440	454	504	628	745	880	975	1140	1320	1800	--	--	--	--

FIG. N. 462SO - GLOBE VALVES BELLOW SEAL ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	--	--	--	--
L RTJ	295	333	359	435	511	562	663	790	841	892	994	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300*	500*	600*	600*	900*	1000*	1000*	1000*	--	--	--	--
H	370	525	565	620	700	800	860	1280	1350	1490	1720	--	--	--	--
H1	385	545	589	650	738	845	920	1355	1440	1630	2100	--	--	--	--

FIG. N. 463SO - GLOBE VALVES BELLOW SEAL ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
V	250	250	350*	500*	650*	700*	900*	1000*	1000*
H	590	710	610	750	890	1000	1170	1540	1720
H1	605	730	634	780	928	1045	1230	1615	1810

FIG. N. 464SO - GLOBE VALVES BELLOW SEAL ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
V	250*	250*	400*	500*	700*	900*	1000*	1000*	1000*
H	590	710	790	860	930	1000	1100	1720	1810
H1	605	730	814	890	968	1045	1160	1795	1950

* Gear operator recommended

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ DISC WITH PTFE INSERT
- ☐ PARABOLIC DISC
- ☐ STOP CHECK DISC
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- **Design** BS 1873
ASME B16.34
WALL THICKNESS TO API 600
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

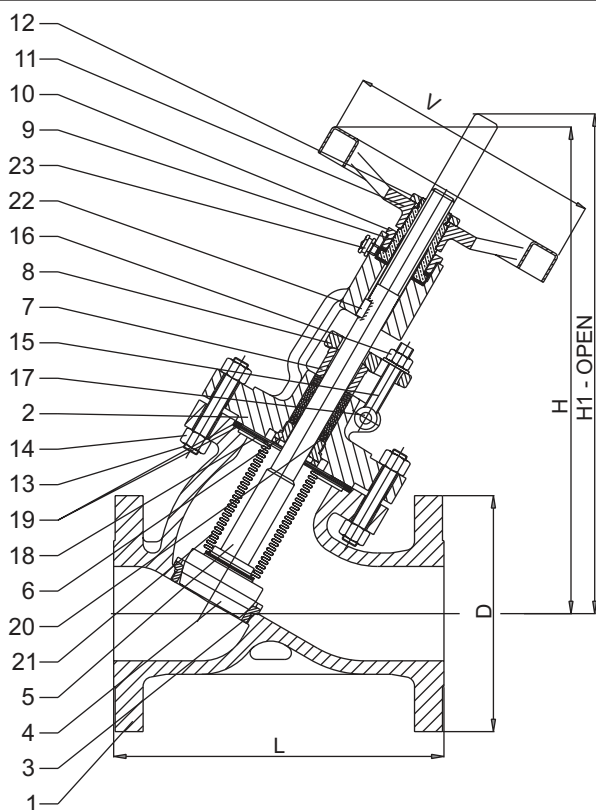

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δ p bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	W46xYSO	L46xYSO	M46xYSO	C46xYSO	B46xYSO	E46xYSO	D46xYSO	F46xYSO	H46xYSO
1 Body	W CB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Bonnet	W CB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Back seat	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
7 Gland	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
8 Gland flange	A105	F316	F316	F316	F316	F316	F316	F316	F316L
9 Yoke sleeve	B148 9A (4)	B148 9A (4)	Nod.Iron	Nod.Iron	Nod.Iron	B148 9A (4)	B148 9A (4)	B148 9A (4)	B148 9A (4)
10 Yoke nut	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
11 Handwheel	Steel								
12 Handwheel nut	A105								
13 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
14 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
15 Eye bolts	B7	B7	B8	B8	B8	B8	B8	B8	B8
16 Nuts	2H	2H	2H	2H	2H	G8	G8	G8	G8
17 Eye bolt pin	B7	B7	B7	B7	B7	B8	B8	B8	B8
18 Bellow flange	A182 F321								
19 Gasket	S.S. spiral wound reinf. graphite / RTJ (5)								
20 Packing	Graphite rings & wiper rings (6)								
21 Bellow	A182 F321								
22 No rot. Device	F6A	F6A	F6A	F6A	F6A	F304	F321	F316	F316L
23 Grease nipple	Steel								

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: Nodular Iron - Nitronic 60

(5) On request: PTFE - other materials

(6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - BELLOW SEAL 'Y' TYPE

ANSI 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460YSO - GLOBE V. BELLOW SEAL Y TYPE ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	--	--	--	--
L RTJ	216	219	254	305	368	419	508	635	711	800	927	--	--	--	--
D	152	178	191	229	254	279	343	406	483	533	597	--	--	--	--
V	200	200	225	250	300	300	400*	500*	500*	800*	800*	--	--	--	--
H	320	350	380	440	480	560	680	750	860	930	1250	--	--	--	--
H1	380	430	470	550	615	720	890	1010	1170	1040	1380	--	--	--	--

FIG. N. 461YSO - GLOBE V. BELLOW SEAL Y TYPE ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	--	--	--	--
L RTJ	282	308	333	371	416	460	575	638	727	854	879	--	--	--	--
D	165	191	210	254	279	318	381	445	521	584	648	--	--	--	--
V	200	225	225	300	300	400*	500*	600*	800*	1000*	1000*	--	--	--	--
H	390	400	410	430	570	680	800	850	1010	1150	1390	--	--	--	--
H1	410	420	435	520	615	735	860	930	1110	1270	1512	--	--	--	--

FIG. N. 462YSO - GLOBE V. BELLOW SEAL Y TYPE ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	--	--	--	--
L RTJ	295	333	359	435	511	562	663	790	841	892	994	--	--	--	--
D	165	191	210	273	330	356	419	508	559	603	686	--	--	--	--
V	200	250	250	300*	500*	600*	600*	900*	1000*	1000*	1000*	--	--	--	--
H	350	515	545	600	686	780	840	1235	1311	1430	1660	--	--	--	--
H1	370	535	570	630	726	830	910	1315	1411	1550	1800	--	--	--	--

FIG. N. 463YSO - GLOBE V. BELLOW SEAL Y TYPE ASME CLASS 900

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
V	250	250	350*	500*	650*	700*	900*	1000*	1000*
H	575	690	590	720	870	973	1140	1500	1680
H1	605	730	634	780	928	1045	1230	1615	1810

FIG. N. 464YSO - GLOBE V. BELLOW SEAL Y TYPE ASME CLASS 1500

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
V	250*	250*	400*	500*	700*	900*	1000*	1000*	1000*
H	575	690	770	840	902	973	1043	1670	1750
H1	615	740	826	915	980	1080	1190	1760	1855

* Gear operator recommended

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- DISC WITH PTFE INSERT
- PARABOLIC DISC
- STOP CHECK DISC
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
INTEGRAL SEAT
LOOSE DISC
- **Design** BS 1873
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5 FOR 2" TO 24"
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 - 3.1 B

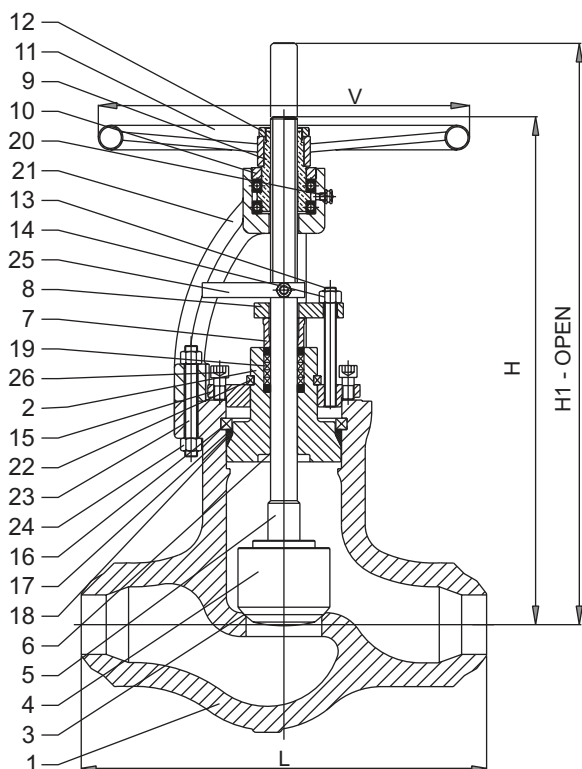

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	WP6x	IP6x	MP6x	WCP6x	FP6x
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Bonnet	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)		←	Stellite® (2)	→	
4 Disc seat surface	WCB + HF (1)	WC1 + HF (1)	WC6 + HF (1)	WC9 + HF (1)	CF8M + HF (1)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F316 (3)
6 Back seat (integral)		←	Stellite® (2)	→	
7 Gland	F6A	F6A	F6A	F6A	F316
8 Gland flange	A105	F316	F316	F316	F316
9 Yoke sleeve		←	B148 9A (4)	→	
10 Yoke nut	A 105	A 105	A 105	A 105	F316
11 Handwheel		←	Steel	→	
12 Handwheel nut		←	A105	→	
13 Bolts	B7	B16	B16	B16	B8
14 Nuts	2H	G4	G4	G4	G8
15 Retaining ring	A105	F6A	F6A	F6A	F316
16 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
17 Spacer ring	F6A	F6A	F6A	F6A	F316
18 Gasket		←	S.S. reinforced graphite (5)	→	
19 Packing		←	Graphite rings & wiper rings	→	
20 Grease nipple		←	Steel	→	
21 Yoke	WCB	WC1	WC6	WC9	CF8M
22 Segmental ring	F6A	F6A	F6A	F6A	F316
23 Yoke / body bolt	B7	B16	B16	B16	B8
24 Yoke / body nut	2H	G4	G4	G4	G8
25 No rotation device	2H	G4	G4	G4	G8
26 Bolts	B7	B16	B16	B16	B8

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: Metal

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - PRESSURE SEAL ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P62 - GLOBE VALVES PRESSURE SEAL ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF	292	356	432	559	660	787	838	889	991	--	--	--	--
L RTJ	295	359	435	562	663	790	841	892	994	--	--	--	--
L BW	292	356	432	559	660	787	838	889	991	--	--	--	--
V	200	250	300	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--
H	500	550	590	840	970	1160	1300	1480	1680	--	--	--	--
H1	540	600	670	930	1120	1350	1525	1750	1980	--	--	--	--

FIG. N. P63 - GLOBE VALVES PRESSURE SEAL ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF	368	381	457	610	737	838	965	1029	1130	--	--	--	--
L RTJ	371	384	460	613	740	842	968	1038	1140	--	--	--	--
L BW	368	381	457	610	737	838	965	1029	1130	--	--	--	--
V	250	300	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--
H	500	550	590	840	970	1160	1300	1585	1639	--	--	--	--
H1	540	600	670	930	1120	1350	1525	1850	1940	--	--	--	--

FIG. N. P64 - GLOBE VALVES PRESSURE SEAL ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	--	--	--	--	--	--
L RF	368	470	546	705	832	991	1130	--	--	--	--	--	--
L RTJ	371	473	549	711	842	1000	1146	--	--	--	--	--	--
L BW	368	470	546	705	832	991	1130	--	--	--	--	--	--
V	250	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--	--	--
H	500	550	590	840	970	1250	1400	--	--	--	--	--	--
H1	540	600	670	930	1120	1350	1525	--	--	--	--	--	--

FIG. N. P65 - GLOBE VALVES PRESSURE SEAL ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	--	--	--	--	--	--
L RF	451	578	673	914	1022	1270	1422	--	--	--	--	--	--
L RTJ	454	584	683	927	1038	1292	1445	--	--	--	--	--	--
L BW	451	578	673	914	1022	1270	1422	--	--	--	--	--	--
V	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--	--	--
H	500	550	600	860	1000	1330	1700	--	--	--	--	--	--
H1	540	600	680	950	1150	1430	1825	--	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC OR HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

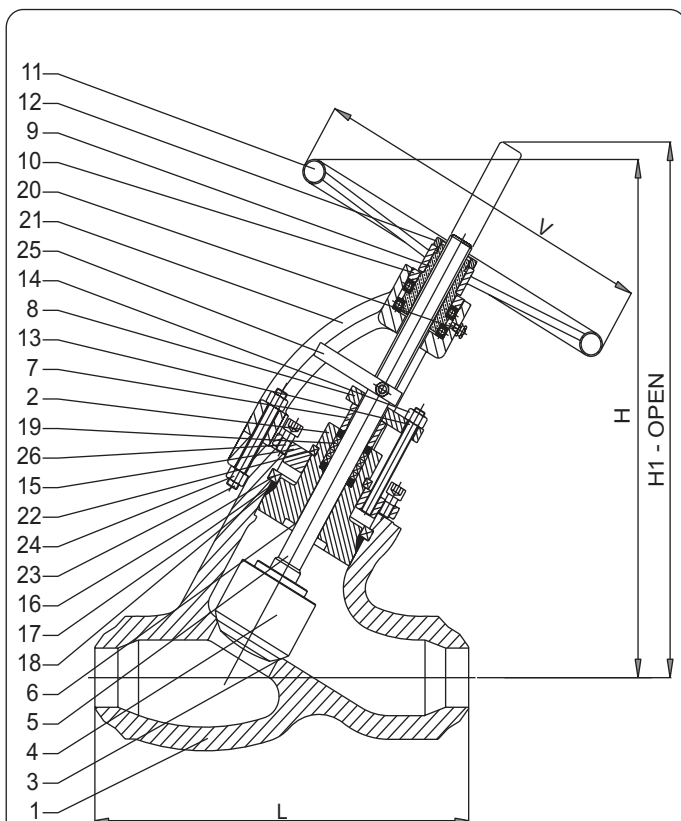

Maximum pressure under the disc

DN	3"	4"	5"	6"	8"	10"	12"	14"	16"
Δp bar	85	60	35	21	14	9	6	5	4

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

standard features

- **Description** PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
INTEGRAL SEAT
LOOSED DISC
- **Design** BS 1873
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5 FOR 2" TO 24"
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 - 3.1 B

PART NAME	WP8x	IP8x	MP8x	WCP8x	FP8x
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Bonnet	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)		←	Stellite® (2)	→	
4 Disc seat surface	WCB + HF (1)	WC1 + HF (1)	WC6 + HF (1)	WC9 + HF (1)	CF8M + HF (1)
5 Stem	F6A (3)	F6A (3)	F6A (3)	F6A (3)	F316 (3)
6 Back seat (integral)		←	Stellite® (2)	→	
7 Gland	F6A	F6A	F6A	F6A	F316
8 Gland flange	A105	F316	F316	F316	F316
9 Yoke sleeve		←	B148 9A (4)	→	
10 Yoke nut	A 105	A 105	A 105	A 105	F316
11 Handwheel		←	Steel	→	
12 Handwheel nut		←	A105	→	
13 Bolts	B7	B16	B16	B16	B8
14 Nuts	2H	G4	G4	G4	G8
15 Retaining ring	A105	F6A	F6A	F6A	F316
16 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
17 Spacer ring	F6A	F6A	F6A	F6A	F316
18 Gasket		←	S.S. reinforced graphite (5)	→	
19 Packing		←	Graphite rings & wiper rings	→	
20 Grease nipple		←	Steel	→	
21 Yoke	WCB	WC1	WC6	WC9	CF8M
22 Segmental ring	F6A	F6A	F6A	F6A	F316
23 Yoke / body bolt	B7	B16	B16	B16	B8
24 Yoke / body nut	2H	G4	G4	G4	G8
25 No rotation device	2H	G4	G4	G4	G8
26 Bolts	B7	B16	B16	B16	B8

- (1) On request: faced with Stellite® Monel® Hastelloy® other materials
 (2) On request: faced with Stellite® Monel® Hastelloy® other materials
 (3) On request: 17 Cr - Monel® Hastelloy® other materials

- (4) On request: Nodular Iron - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES PRESSURE SEAL - Y TYPE **ASME 600 - 900 - 1500 - 2500**

VALVOSIDER
 MANUFACTURER OF VALVES

FIG. N. P82 - GLOBE VALVES PRESSURE SEAL - Y TYPE - ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF	292	356	432	559	660	787	838	889	991	--	--	--	--
L RTJ	295	359	435	562	663	790	841	892	994	--	--	--	--
L BW	292	356	432	559	660	787	838	889	991	--	--	--	--
V	200	250	300	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--
H	500	550	590	840	970	1080	1200	1360	1540	--	--	--	--
H1	540	600	670	930	1120	1270	1425	1620	1840	--	--	--	--

FIG. N. P83 - GLOBE VALVES PRESSURE SEAL - Y TYPE - ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	--	--	--	--
L RF	368	381	457	610	737	838	965	1029	1130	--	--	--	--
L RTJ	371	384	460	613	740	842	968	1038	1140	--	--	--	--
L BW	368	381	457	610	737	838	965	1029	1130	--	--	--	--
V	250	300	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--
H	500	550	640	900	960	1080	1200	1380	1585	--	--	--	--
H1	540	600	715	995	1110	1380	1425	1643	1885	--	--	--	--

FIG. N. P84 - GLOBE VALVES PRESSURE SEAL - Y TYPE - ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	--	--	--	--	--	--
L RF	368	470	546	705	832	991	1130	--	--	--	--	--	--
L RTJ	371	473	549	711	842	1000	1146	--	--	--	--	--	--
L BW	368	470	546	705	832	991	1130	--	--	--	--	--	--
V	250	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--	--	--
H	520	550	640	900	1165	1210	1575	--	--	--	--	--	--
H1	560	600	715	995	1315	1400	1800	--	--	--	--	--	--

FIG. N. P85 - PRESSURE SEAL GLOBE VALVES - Y TYPE - ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	--	--	--	--	--	--
L RF	451	578	673	914	1022	1270	1422	--	--	--	--	--	--
L RTJ	454	584	683	927	1038	1292	1445	--	--	--	--	--	--
L BW	451	578	673	914	1022	1270	1422	--	--	--	--	--	--
V	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--	--	--	--	--	--
H	550	550	670	1145	1235	1435	1610	--	--	--	--	--	--
H1	590	600	750	1240	1385	1625	1835	--	--	--	--	--	--

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC OR HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- PTFE SOFT SEATS
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- FLANGED ENDS
- DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.





ISO 9001-2000
 CERTIFIED

A.N.C.C.
 I.S.P.E.S.L.
 NOTIFIED











VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESCRIPTION OF A TYPICAL SWING CHECK VALVE

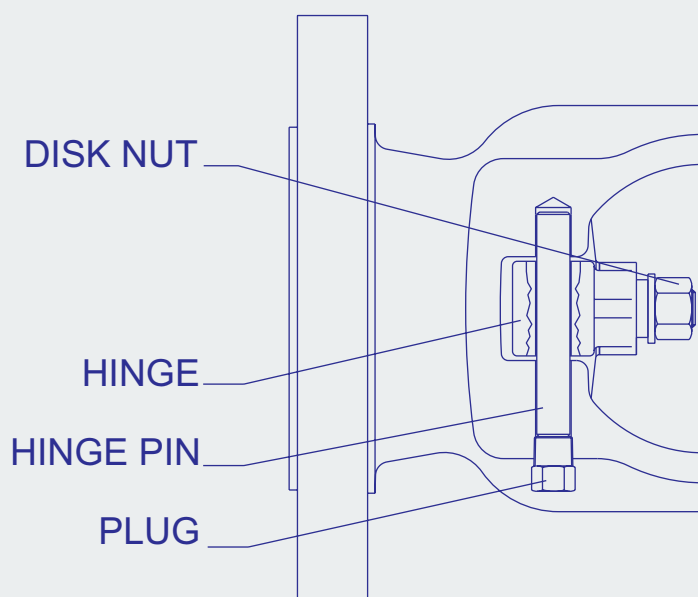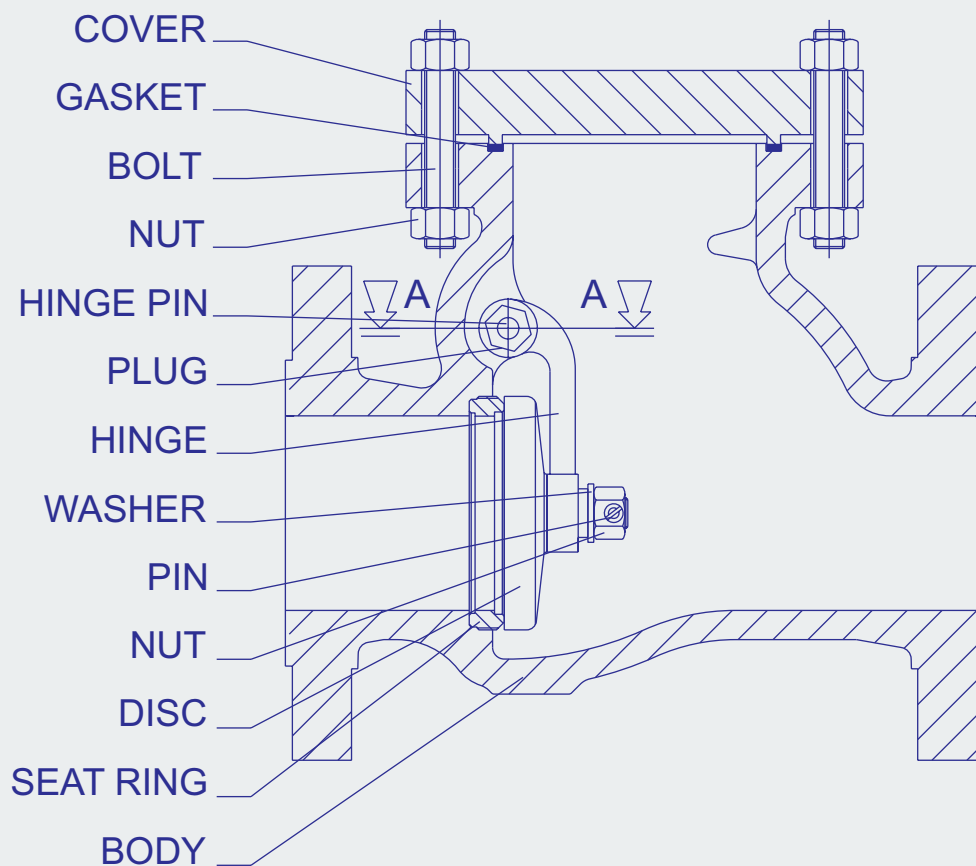

SEC. A-A

	TYPE	CLASS	SIZES	FIG. N.
	SWING CHECK VALVES	150	2" - 48"	470
		300	2" - 48"	471
		600	2" - 40"	472
	REGULAR TYPE	900	2" - 24"	473
	OR	1500	2" - 24"	474
	FULL OPENING	2500	2" - 12"	475
page 38				
	PISTON CHECK VALVES	150	2" - 16"	460PC
		300	2" - 16"	461PC
		600	2" - 12"	462PC
		900	2" - 12"	463PC
		1500	2" - 12"	464PC
page 40				
	PISTON CHECK VALVES	150	2" - 24"	490PC
		300	2" - 24"	491PC
		600	2" - 24"	492PC
	'Y' TYPE	900	2" - 16"	493PC
		1500	2" - 16"	494PC
		2500	2" - 12"	495PC
page 42				
	SWING CHECK VALVES	600	2" - 24"	P72
		900	2" - 24"	P73
	PRESSURE SEAL	1500	2" - 24"	P74
		2500	2" - 12"	P75
page 44				
	LIFT CHECK VALVES	600	2" - 16"	P62PC
		900	2" - 16"	P63PC
	PRESSURE SEAL	1500	2" - 12"	P64PC
	'STRAIGHT'	2500	2" - 12"	P65PC
page 46				
	LIFT CHECK VALVES	600	2" - 16"	P82PC
		900	2" - 16"	P83PC
	PRESSURE SEAL	1500	2" - 12"	P84PC
	'Y' PATTERN	2500	2" - 12"	P85PC
page 48				
	TILTING DISC CHECK VALVES	600	2" - 24"	P72T
		900	2" - 24"	P73T
	PRESSURE SEAL	1500	2" - 24"	P74T
		2500	2" - 12"	P75T
page 50				

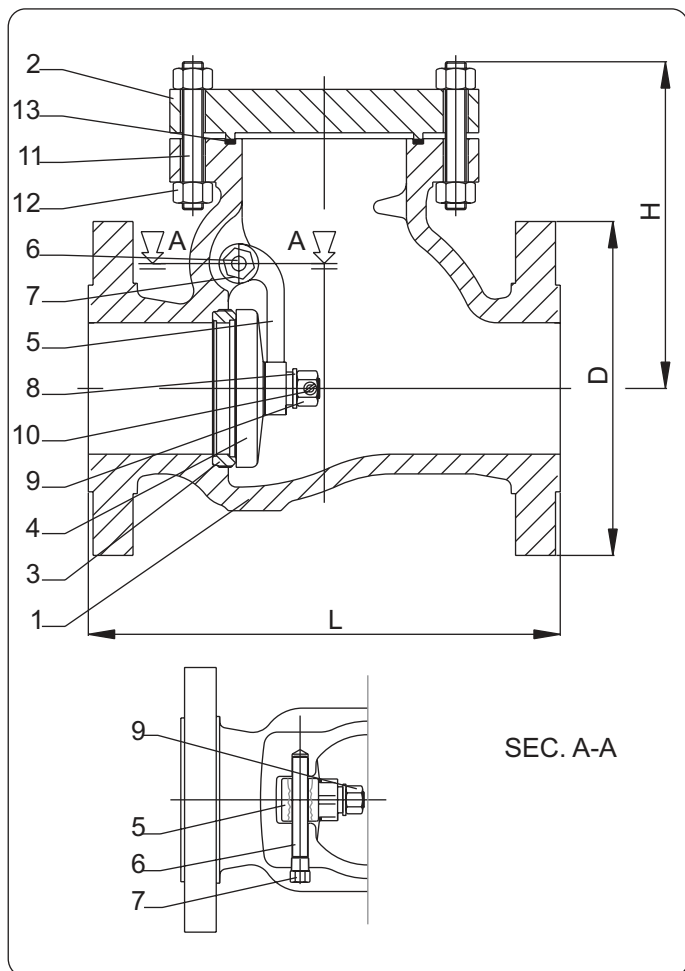

standard features

- **Description** REGULAR TYPE OR FULL OPENING
BOLTED COVER
LAPPED DISC AND SEAT
WALL THICKNESS TO API 600
RENEWABLE SEAT
- **Design** BS 1868
API 6D
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5 FOR 2" TO 24"
ASME B16.47 FOR 26"
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W47x	L47x	M47x	C47x	B47x	E47x	D47x	F47x	H47x
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Cover	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Hinge	A105 (3)	LF2 (3)	F316 (3)	F316 (3)	F316 (3)	F304 (3)	F321 (3)	F316 (3)	F316L (3)
6 Hinge pin	F6A	F6A	F6A	F6A	F6A	F316L	F321	F316	F316L
7 Plug	A105	F316	F316	F316	F316	F316	F316	F316	F316L
8 Washer	A105	F316	F316	F316	F316	F316	F316	F316	F316
9 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
10 Pin	← F316 →								
11 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
12 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
13 Gasket	ANSI 150-300-600-900-1500: S.S. spiral wound reinf. graphite / RTJ - ANSI 2500: RTJ (4)								

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

SWING CHECK VALVES

ASME 150 - 300 - 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 470 - SWING CHECK VALVES ANSI 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	203	216	241	292	330	356	495	622	699	787	864	978	978	1295	1448	1524	—	—	1956	—	—	—
L RTJ	216	229	254	305	343	368	508	635	711	800	876	991	991	1308	—	—	—	—	—	—	—	—
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	927	984	1060	1111	1168	1289	1346	1511
H	150	180	195	220	230	270	330	350	400	440	490	550	620	740	800	840	900	960	1040	1150	1280	1350

FIG. N. 471 - SWING CHECK VALVES ANSI 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	267	292	318	356	400	445	533	622	711	838	864	978	1016	1346	1499	1594	—	—	2083	—	—	—
L RTJ	282	308	333	371	416	460	549	638	727	854	879	994	1035	1369	1524	1619	—	—	2111	—	—	—
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	1035	1092	1149	1207	1270	1238	1289	1467
H	150	180	200	225	270	300	355	390	445	495	530	610	660	750	—	—	—	—	—	—	—	—

FIG. N. 472 - SWING CHECK VALVES ANSI 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	34"	36"	40"	42"	48"
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	1549	1651	—	—	2083	—	—	—
L RTJ	295	333	359	435	511	562	663	790	841	892	994	1095	1200	1407	1560	1664	—	—	2099	—	—	—
D	165	191	210	273	330	356	419	508	559	603	686	743	813	940	1073	1130	1194	1245	1315	1321	—	—
H	194	211	230	292	306	368	408	468	516	564	666	740	838	—	—	—	—	—	—	—	—	—

FIG. N. 473 - SWING CHECK VALVES ANSI 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	368	381	457	610	737	838	965	1029	1130	1219	1321	1549	—
L RTJ	371	384	460	613	740	842	968	1038	1140	1232	1334	1568	—
D	216	241	292	381	470	546	610	641	705	787	857	1041	—
H	263	265	326	352	409	536	600	700	762	822	885	1000	—

FIG. N. 474 - SWING CHECK VALVES ANSI 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943	—
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972	—
D	216	267	311	394	483	584	673	749	826	914	984	1168	—
H	263	304	423	506	716	762	818	—	—	—	—	—	—

FIG. N. 475 - SWING CHECK VALVES ANSI 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
L RF/BW	451	578	673	914	1022	1270	1422	—	—	—	—	—	—
L RTJ	454	584	683	927	1038	1292	1445	—	—	—	—	—	—
D	235	305	356	483	552	673	762	—	—	—	—	—	—
H	—	—	—	—	—	—	—	—	—	—	—	—	—

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ LEVER AND WEIGHT
- ☐ SHOCK ABSORBER
- ☐ LOCKING DEVICE
- ☐ INTEGRAL SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

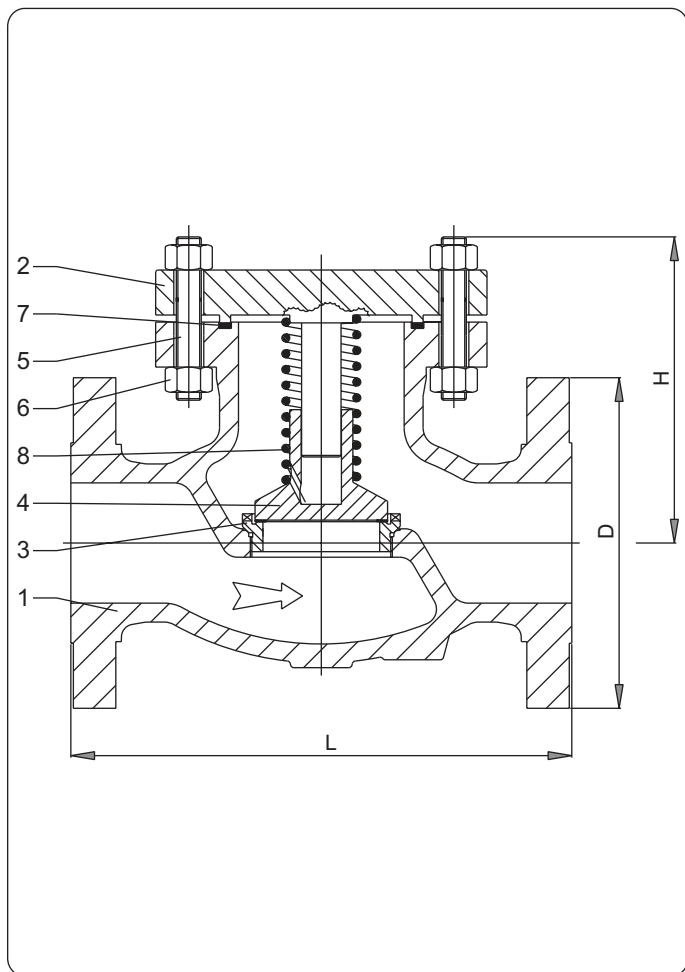

standard features

- **Description** BOLTED COVER
RETURN SPRING
WALL THICKNESS TO API 600
RENEWABLE SEAT
- **Design** BS 1873
API 600
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W46xPC	L46xPC	M46xPC	C46xPC	B46xPC	E46xPC	D46xPC	F46xPC	H46xPC
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Cover	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Spring	← F316 →								
6 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
7 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
8 Gasket	← S.S. spiral wound reinf. graphite / RTJ (3) →								

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PISTON CHECK VALVES

ASME 150 - 300 - 600 - 900 - 1500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 460PC - PISTON CHECK VALVES ASME CLASS 150

SIZE	2"	2 1/2"	3	4	5	6	8	10	12	14	16	---	---	---	---
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	---	---	---	---
L RTJ	216	219	254	305	368	419	508	635	711	800	927	---	---	---	---
D	152	178	191	229	254	279	343	406	483	533	597	---	---	---	---
H	155	180	185	195	215	250	295	330	380	420	500	---	---	---	---

FIG. N. 461PC - PISTON CHECK VALVES ASME CLASS 300

SIZE	2"	2 1/2"	3	4	5	6	8	10	12	14	16	---	---	---	---
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	---	---	---	---
L RTJ	282	308	333	371	416	460	575	638	727	854	879	---	---	---	---
D	165	191	210	254	279	318	381	445	521	584	648	---	---	---	---
H	155	180	195	220	255	285	335	350	430	495	500	---	---	---	---

FIG. N. 462PC - PISTON CHECK VALVES ASME CL. 600

SIZE	2"	2 1/2"	3	4	5	6	8	10	12
L RF/BW	292	330	356	432	508	559	660	787	838
L RTJ	295	333	359	435	511	562	663	790	841
D	165	191	210	273	330	356	419	508	559
H	155	180	195	220	306	320	380	480	505

FIG. N. 463PC - PISTON CHECK VALVES ASME CL. 900

SIZE	2"	2 1/2"	3	4	5	6	8	10	12
L RF/BW	368	419	381	457	559	610	737	838	965
L RTJ	371	422	384	460	562	613	740	842	968
D	216	244	241	292	349	381	470	546	610
H	220	230	240	280	330	365	409	536	600

FIG. N. 464PC - PISTON CHECK VALVES ASME CL.1500

SIZE	2"	2 1/2"	3	4	5	6	8	10	12
L RF/BW	368	419	470	546	673	705	832	991	1130
L RTJ	371	422	473	549	676	711	842	1000	1146
D	216	244	267	311	375	394	483	584	673
H	220	230	280	325	400	430	716	762	818

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

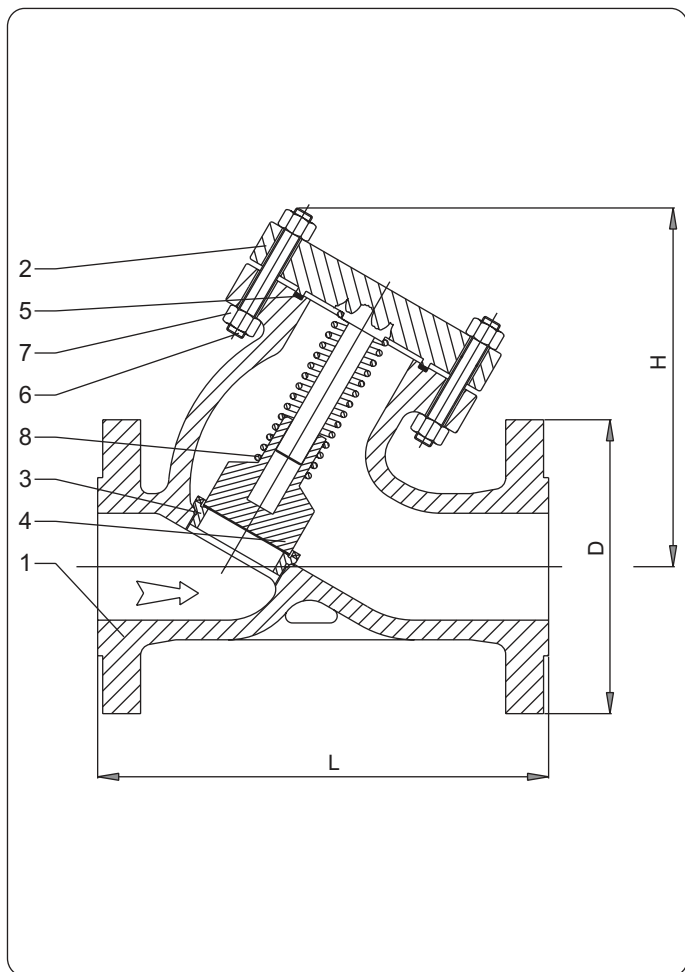

standard features

- **Description** BOLTED COVER
RETURN SPRING
WALL THICKNESS TO API 600
RENEWABLE SEAT
- **Design** BS 1873
API 600
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	W49xPC	L49xPC	M49xPC	C49xPC	B49xPC	E49xPC	D49xPC	F49xPC	H49xPC
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Cover	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Seat ring surface	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F6A (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Disc seat surface	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F6A (2)	F304 (2)	F321 (2)	F316 (2)	F316L (2)
5 Spring	F316								
6 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
7 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
8 Gasket	S.S. spiral wound reinf. graphite / RTJ (3)								

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PISTON CHECK VALVES - 'Y' TYPE ASME 150 - 300 - 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 490PC - PISTON CHECK VALVES 'Y' TYPE ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	978	978	1295	---
L RTJ	216	219	254	305	368	419	508	635	711	800	927	991	991	1308	---
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	---
H	146	185	195	235	301	366	530	530	665	---	---	---	---	---	---

FIG. N. 491PC - PISTON CHECK VALVES 'Y' TYPE ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	978	1016	1346	---
L RTJ	282	308	333	371	416	460	575	638	727	854	879	994	1035	1368	---
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	---
H	145	190	223	235	300	330	365	570	740	---	---	---	---	---	---

FIG. N. 492PC - PISTON CHECK VALVES 'Y' TYPE ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	---
L RTJ	295	333	359	435	511	562	663	790	841	892	994	1095	1200	1407	---
D	165	191	210	273	330	356	419	508	559	603	686	743	813	940	---
H	185	210	230	290	370	425	470	---	---	---	---	---	---	---	---

FIG. N. 493PC - PISTON CHECK V. 'Y' TYPE ASME CL.900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	381	457	610	737	838	965	1029	1130
L RTJ	371	384	460	613	740	842	968	1038	1140
D	216	241	292	381	470	546	610	641	705
H	---	---	---	---	---	---	---	---	---

FIG. N. 494PC - PISTON CHECK V. 'Y' TYPE ASME CL.1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	470	546	705	832	991	1130	1257	1384
L RTJ	371	473	549	711	842	1000	1146	1276	1407
D	216	267	311	394	483	584	673	749	826
H	---	---	---	---	---	---	---	---	---

FIG. N. 495PC - PISTON CHECK V. 'Y' TYPE ASME CL.2500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---
L RF/BW	451	578	673	914	1022	1270	1422	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---
D	235	305	356	483	552	673	762	---	---
H	---	---	---	---	---	---	---	---	---

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL BONNET
FULL BORE
LAPPED DISC AND SEAT
WELDED IN SEATS
- **Design** BS 1868
API 6D
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

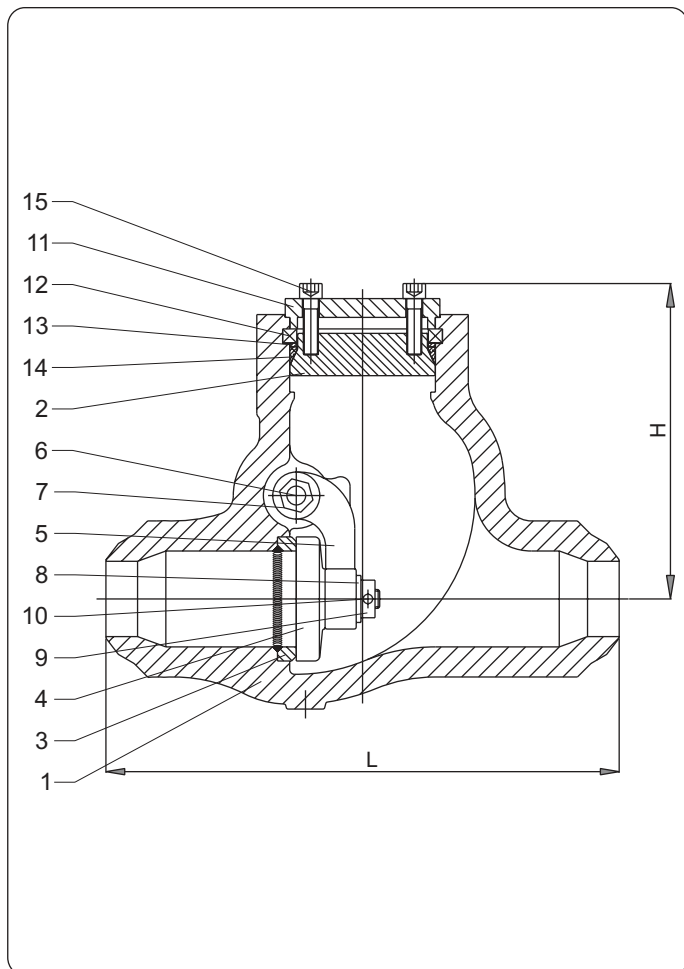

PART NAME	WP7x	IP7x	MP7x	WCP7x	FP7x
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Cover	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)		Stellite® (1)			
4 Disc - seat	A105 + HF (2)	F6A + HF (2)	F6A + HF (2)	F6A + HF (2)	F316 + HF (2)
5 Hinge	WCB	WC1	WC6	WC9	CF8M
6 Hinge pin	F6A	F6A	F6A	F6A	F316
7 Plug (externally)	A105	F316	F316	F316	F316
8 Washer	A105	F316	F316	F316	F316
9 Nut	2H	G4	G4	G4	G8
10 Pin	F316	F316	F316	F316	F316
11 Retaining ring	A105	F6A	F6A	F6A	F316
12 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
13 Spacer ring	F6A	F6A	F6A	F6A	F316
14 Gasket		S.S. reinforced graphite (3)			
15 Bolt	B7	B16	B16	B16	B8

(1) On request: faced with Stellite® - Monei® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monei® - Hastelloy® - other materials

(3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

SWING CHECK VALVES - PRESSURE SEAL ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P72 - SWING CHECK VALVES PRESSURE SEAL ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF/BW	292	356	432	559	660	787	838	889	991	1092	1194	1397	---	---	---
L RTJ	295	359	435	562	663	790	841	892	994	1095	1200	1407	---	---	---
H	180	215	275	350	390	450	500	555	630	710	800	1000	---	---	---

FIG. N. P73 - SWING CHECK VALVES PRESSURE SEAL ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF/BW	368	381	457	610	737	838	965	1029	1130	1219	1321	1549	---	---	---
L RTJ	371	384	460	613	740	842	968	1038	1140	1232	1334	1568	---	---	---
H	245	250	310	390	510	580	620	680	740	800	850	1100	---	---	---

FIG. N. P74 - SWING CHECK VALVES PRESSURE SEAL ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF/BW	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943	---	---	---
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972	---	---	---
H	245	290	350	420	630	690	750	800	980	1100	1300	1550	---	---	---

FIG. N. P75 - SWING CHECK VALVES PRESSURE SEAL ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---	---	---	---	---	---	---
L RF/BW	451	578	673	914	1022	1270	1422	---	---	---	---	---	---	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---	---	---	---	---	---	---
H	245	300	380	430	650	720	780	---	---	---	---	---	---	---	---

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ LEVER AND WEIGHT
- ☐ SHOCK ABSORBER
- ☐ LOCKING DEVICE
- ☐ INTEGRAL SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL BONNET
LAPPED DISC AND SEAT
INTEGRAL SEAT
- **Design** BS 1873
API 6D
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

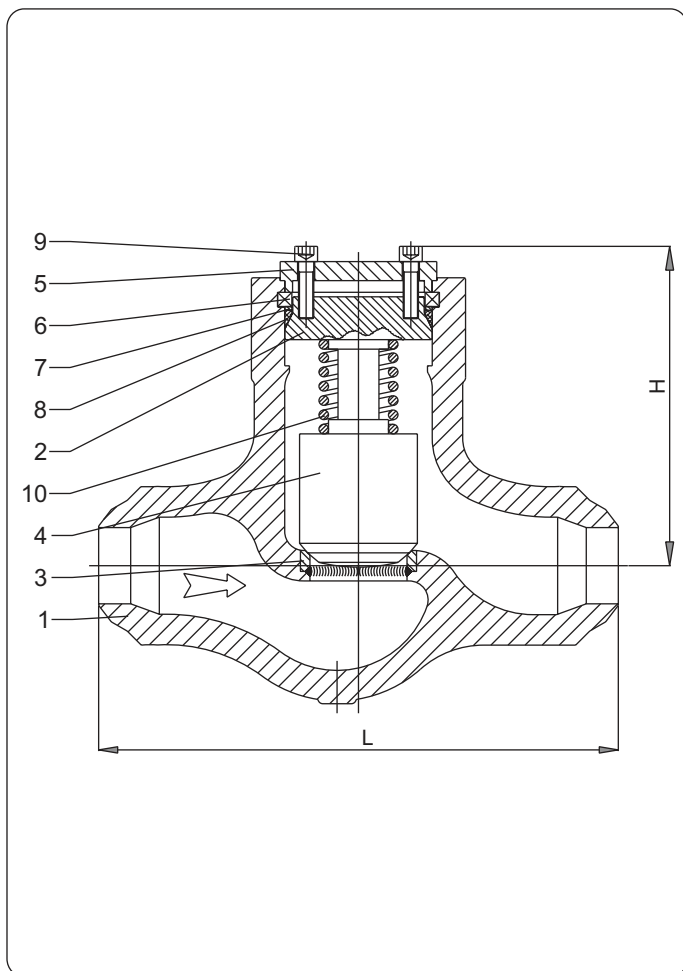

PART NAME	WP6xPC	IP6xPC	MP6xPC	WCP6xPC	FP6xPC
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Cover	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)	← Stellite® (1) →				
4 Disc - seat	A105 + HF (2)	F6A + HF (2)	F6A + HF (2)	F6A + HF (2)	A182 F316 + HF (2)
5 Retaining ring	A105	F6A	F6A	F6A	F316
6 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
7 Spacer ring	F6A	F6A	F6A	F6A	F316
8 Gasket	← S.S. reinforced graphite (3) →				
9 Bolt	B7	B16	B16	B16	B8
10 Spring	← F316 →				

(1) On request: faced with Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

LIFT CHECK VALVES - PRESSURE SEAL STRAIGHT TYPE - ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P62PC - LIFT CHECK VALVES PRESSURE SEAL STRAIGHT TYPE - ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	---	---	---	---	---	---
L RF/BW	292	356	432	559	660	787	838	889	991	---	---	---	---	---	---
L RTJ	295	359	435	562	663	790	841	892	994	---	---	---	---	---	---
H	230	280	330	450	520	600	700	800	900	---	---	---	---	---	---

FIG. N. P63PC - LIFT CHECK VALVES PRESSURE SEAL STRAIGHT TYPE - ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	---	---	---	---	---	---
L RF/BW	368	381	457	610	737	838	965	1029	1130	---	---	---	---	---	---
L RTJ	371	384	460	613	740	842	968	1038	1140	---	---	---	---	---	---
H	270	300	390	430	520	600	700	800	900	---	---	---	---	---	---

FIG. N. P64PC - LIFT CHECK VALVES PRESSURE SEAL STRAIGHT TYPE - ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---	---	---	---	---	---	---
L RF/BW	368	470	546	705	832	991	1130	---	---	---	---	---	---	---	---
L RTJ	371	473	549	711	842	1000	1146	---	---	---	---	---	---	---	---
H	270	310	400	440	530	620	720	---	---	---	---	---	---	---	---

FIG. N. P65PC - LIFT CHECK VALVES PRESSURE SEAL STRAIGHT TYPE - ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---	---	---	---	---	---	---
L RF/BW	451	578	673	914	1022	1270	1422	---	---	---	---	---	---	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---	---	---	---	---	---	---
H	270	310	400	440	530	620	720	---	---	---	---	---	---	---	---

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ RENEWABLE SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL BONNET
LAPPED DISC AND SEAT
INTEGRAL SEAT
- **Design** BS 1873
API 6D
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

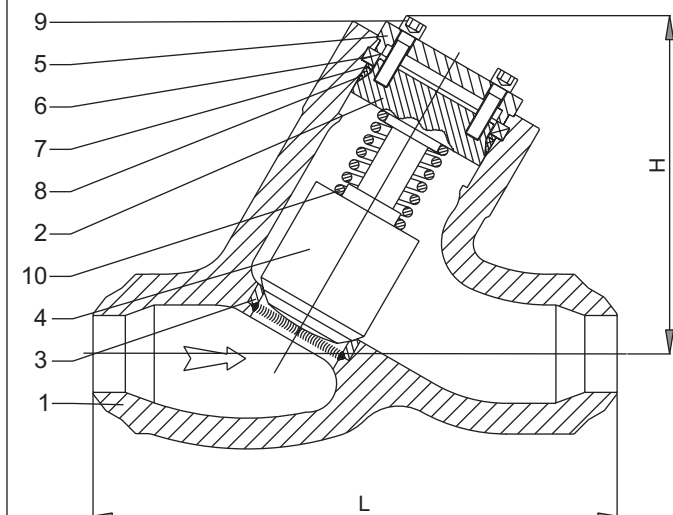

PART NAME	WP8xPC	IP8xPC	MP8xPC	WCP8xPC	FP8xPC
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Cover	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)	← Stellite® (1) →				
4 Disc - seat	A105 + HF (2)	F6A + HF (2)	F6A + HF (2)	F6A + HF (2)	A182 F316 + HF (2)
5 Retaining ring	A105	F6A	F6A	F6A	F316
6 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
7 Spacer ring	F6A	F6A	F6A	F6A	F316
8 Gasket	← S.S. reinforced graphite (3) →				
9 Bolt	B7	B16	B16	B16	B8
10 Spring	← F316 →				

- (1) On request: faced with Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

LIFT CHECK VALVES - PRESSURE SEAL 'Y' TYPE - ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P82PC - LIFT CHECK VALVES PRESSURE SEAL - 'Y' TYPE - ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	---	---	---	---	---	---
L RF/BW	292	356	432	559	660	787	838	889	991	---	---	---	---	---	---
L RTJ	295	359	435	562	663	790	841	892	994	---	---	---	---	---	---
H	253	308	363	495	572	660	770	880	990	---	---	---	---	---	---

FIG. N. P83PC - LIFT CHECK VALVES PRESSURE SEAL - 'Y' TYPE - ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	---	---	---	---	---	---
L RF/BW	368	381	457	610	737	838	965	1029	1130	---	---	---	---	---	---
L RTJ	371	384	460	613	740	842	968	1038	1140	---	---	---	---	---	---
H	297	330	429	473	572	660	770	880	990	---	---	---	---	---	---

FIG. N. P84PC - LIFT CHECK VALVES PRESSURE SEAL - 'Y' TYPE - ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---	---	---	---	---	---	---
L RF/BW	368	470	546	705	832	991	1130	---	---	---	---	---	---	---	---
L RTJ	371	473	549	711	842	1000	1146	---	---	---	---	---	---	---	---
H	297	341	440	484	583	682	792	---	---	---	---	---	---	---	---

FIG. N. P85PC - LIFT CHECK VALVES PRESSURE SEAL - 'Y' TYPE - ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---	---	---	---	---	---	---
L RF/BW	451	578	673	914	1022	1270	1422	---	---	---	---	---	---	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---	---	---	---	---	---	---
H	297	341	440	484	583	682	792	---	---	---	---	---	---	---	---

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ RENEWABLE SEAT
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

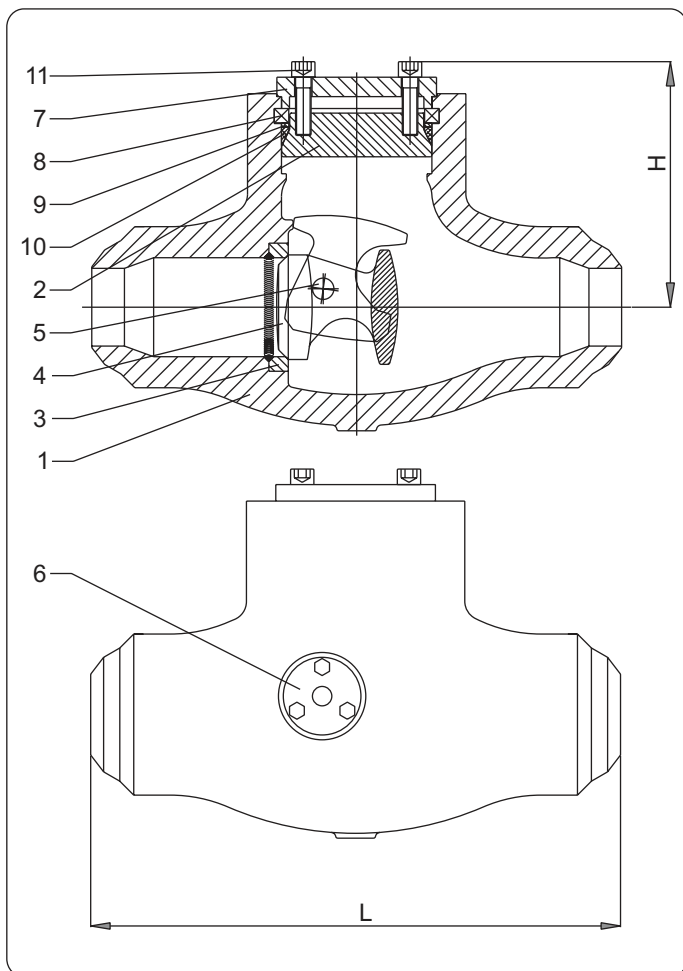

standard features

- **Description** PRESSURE SEAL BONNET
LAPPED DISC AND SEAT
INTEGRAL SEAT
- **Design** BS 1873
API 6D
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW ENDS TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	WP7xT	IP7xT	MP7xT	WCP7xT	FP7xT
1 Body	WCB	WC1	WC6	WC9	CF8M
2 Cover	WCB	WC1	WC6	WC9	CF8M
3 Seat (integral)		← Stellite® (1) →			
4 Disc - seat	A105 + HF (2)	F6A + HF (2)	F6A + HF (2)	F6A + HF (2)	F316 + HF (2)
5 Pin	F6A	F6A	F6A	F6A	F316
6 Plug (externally)	A105	F6A	F6A	F6A	F316
7 Retaining ring	A105	F316	F316	F316	F316
8 Segmental retaining ring	F6A	F6A	F6A	F6A	F316
9 Spacer ring	F6A	F6A	F6A	F6A	F316
10 Gasket		← S.S. reinforced graphite (3) →			
11 Bolt	B7	B16	B16	B16	B8

(1) On request: faced with Monel® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

TILTING DISC CHECK VALVES

PRESSURE SEAL - ASME 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. P72T - TILTING DISC CHECK VALVES PRESSURE SEAL ASME CLASS 600

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF	292	356	432	559	660	787	838	889	991	1092	1194	1397	---	---	---
L RTJ	295	359	435	562	663	790	841	892	994	1095	1200	1407	---	---	---
L BW	178	254	305	457	584	711	813	889	991	1092	1194	1397	---	---	---
H	180	215	275	350	390	450	500	555	630	710	800	1000	---	---	---

FIG. N. P73T - TILTING DISC CHECK VALVES PRESSURE SEAL ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF	368	381	457	610	737	838	965	1029	1130	1219	1321	1549	---	---	---
L RTJ	371	384	460	613	740	842	968	1038	1140	1232	1334	1568	---	---	---
L BW	216	305	356	508	660	787	914	991	1092	1143	1245	1397	---	---	---
H	245	250	310	390	510	580	620	680	740	800	850	1100	---	---	---

FIG. N. P74T - TILTING DISC CHECK VALVES PRESSURE SEAL ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF	368	470	546	705	832	991	1130	1257	1384	1537	1664	1943	---	---	---
L RTJ	371	473	549	711	842	1000	1146	1276	1407	1559	1686	1972	---	---	---
L BW	216	305	406	559	711	864	991	1067	1194	1346	1473	1943	---	---	---
H	245	290	350	420	630	690	750	800	980	1100	1300	1550	---	---	---

FIG. N. P75T - TILTING DISC CHECK VALVES PRESSURE SEAL ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---	---	---
L RF	451	578	673	914	1022	1270	1422	---	---	---	---	---	---	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---	---	---	---	---	---	---
L BW	279	368	457	610	762	914	1041	---	---	---	---	---	---	---	---
H	245	300	380	430	650	720	780	---	---	---	---	---	---	---	---

features on request

- | | |
|--|---------------------------------------|
| ☐ DISC WITH PTFE OR RUBBER | ☐ DRAIN PLUG |
| ☐ LEVER AND WEIGHT | ☐ BY PASS |
| ☐ SHOCK ABSORBER | ☐ FLANGED ENDS |
| ☐ LOCKING DEVICE | ☐ RTJ FLANGES |
| ☐ INTEGRAL SEAT | ☐ DIN CONNECTIONS |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED



A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com


DESCRIPTION OF A TYPICAL STRAINER 'Y' TYPE

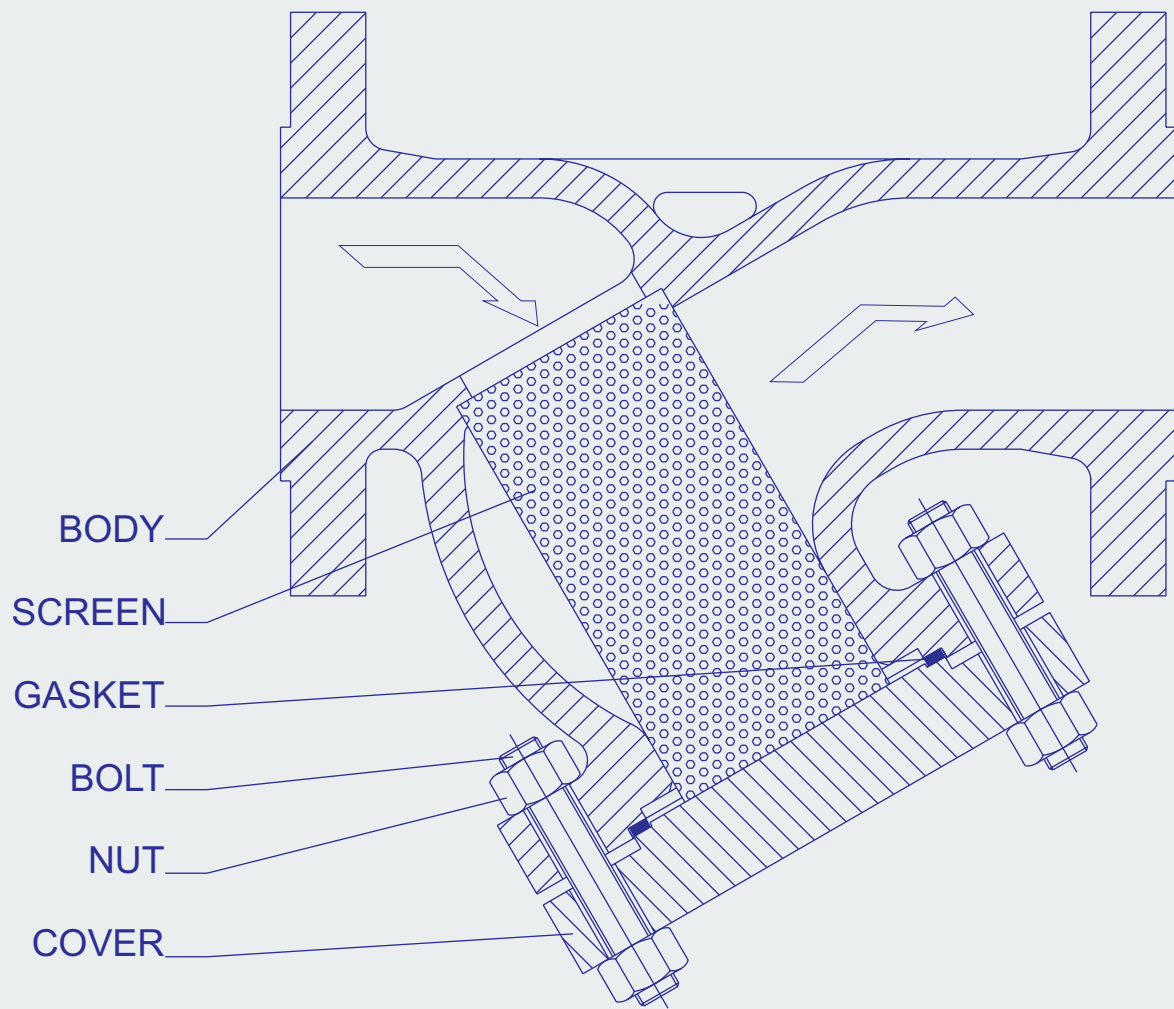

TYPE		CLASS	SIZES	FIG. N.
 STRAINERS 'Y' TYPE page 54		150	2" - 24"	490
		300	2" - 24"	491
		600	2" - 24"	492
		900	2" - 16"	493
		1500	2" - 16"	494
		2500	2" - 12"	495
 STRAINERS BASKET TYPE page 56		150	2" - 16"	490BK
		300	2" - 16"	491BK
		600	2" - 16"	492BK
		900	2" - 12"	493BK
		1500	2" - 12"	494BK
		2500	2" - 8"	495BK

standard features

- **Description** BOLTED COVER
REPLACEABLE SCREEN
- **Design** BS 1873
API 600
ASME B16.34
- **Face to face** ASME B16.10
- **Flanges** ASME B16.5
BW TO ASME B16.25
- **Testing** API 598
API 6D
BS 6755
- **Rating** ASME B16.34
- **Marking** MSS-SP 25
CE - PED
- **Certificates** EN 10204 – 3.1 B

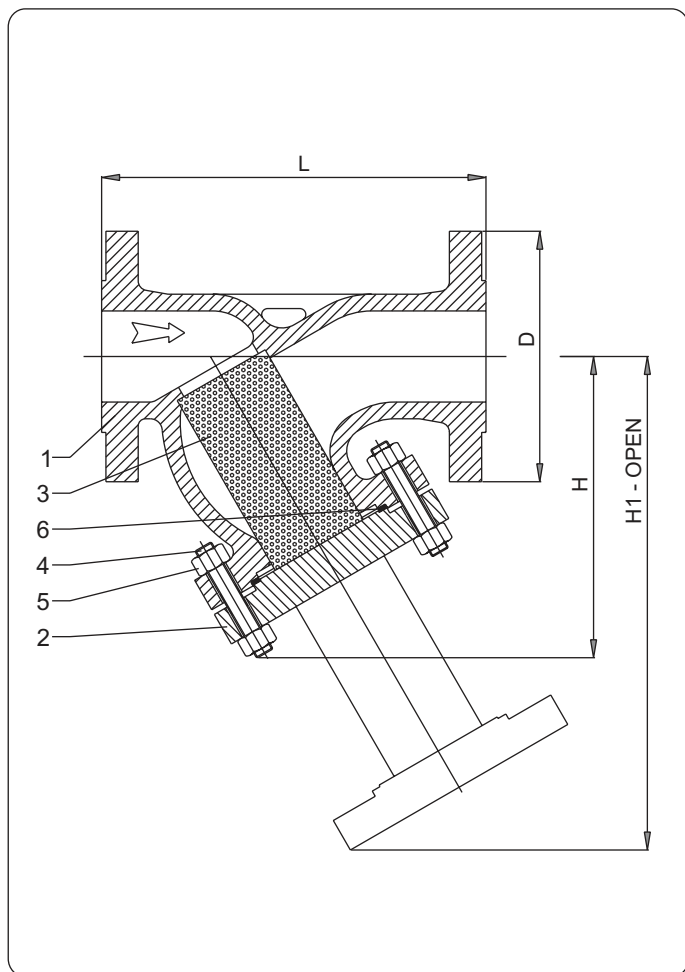

PART NAME	W49x	L49x	M49x	C49x	B49x	E49x	D49x	F49x	H49x
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Cover	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Screen	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
5 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
6 Gasket	ANSI 150 - 300 - 600 - 900 - 1500 : S.S. spiral wound reinf. Graphite / RTJ - ANSI 2500 : RTJ (2)								

(1) On request: other materials

(2) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

STRAINERS - 'Y' TYPE

ASME 150 - 300 - 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 490 - STRAINERS - Y TYPE - ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	978	978	1295	---
L RTJ	216	219	254	305	368	419	508	635	711	800	927	991	991	1308	---
D	152	178	191	229	254	279	343	406	483	533	597	635	699	813	---
H	146	185	195	235	301	366	530	530	665	---	---	---	---	---	---
H1	222	274	285	350	440	537	733	733	880	---	---	---	---	---	---

FIG. N. 491 - STRAINERS - Y TYPE - ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	978	1016	1346	---
L RTJ	282	308	333	371	416	460	575	638	727	854	879	994	1035	1368	---
D	165	191	210	254	279	318	381	445	521	584	648	711	775	914	---
H	145	190	223	235	300	330	365	570	740	---	---	---	---	---	---
H1	228	290	328	362	450	489	555	892	1040	---	---	---	---	---	---

FIG. N. 492 - STRAINERS - Y TYPE - ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	---
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	---
L RTJ	295	333	359	435	511	562	663	790	841	892	994	1095	1200	1407	---
D	165	191	210	273	330	356	419	508	559	603	686	743	813	940	---
H	185	210	230	290	370	425	470	---	---	---	---	---	---	---	---
H1	267	305	335	427	540	602	680	---	---	---	---	---	---	---	---

FIG. N. 493 - STRAINERS - Y TYPE - ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	381	457	610	737	838	965	1029	1130
L RTJ	371	384	460	613	740	842	968	1038	1140
D	216	241	292	381	467	546	610	641	705
H	320	340	370	455	---	---	---	---	---
H1	690	510	550	675	---	---	---	---	---

FIG. N. 494 - STRAINERS - Y TYPE - ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
L RF/BW	368	470	546	705	832	991	1130	1257	1384
L RTJ	371	473	549	711	842	1000	1146	1276	1407
D	216	267	311	394	483	584	673	749	826
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

FIG. N. 495 - STRAINERS - Y TYPE - ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---
L RF/BW	451	578	673	914	1022	1270	1422	---	---
L RTJ	454	584	683	927	1038	1292	1445	---	---
D	235	305	356	483	552	673	762	---	---
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

features on request

- ☐ SCREEN IN SPECIAL MATERIAL
- ☐ DISCHARGE VALVE
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

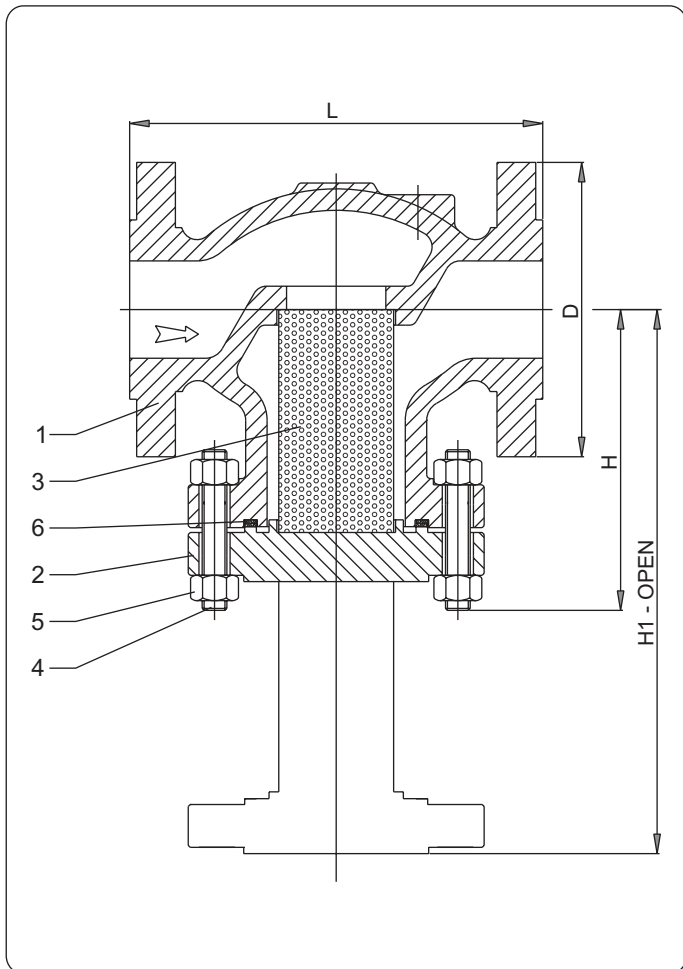

- ☐ **Description** BOLTED COVER
REPLACEABLE SCREEN
- ☐ **Design** BS 1873
API 600
ASME B16.34
- ☐ **Face to face** ASME B16.10
- ☐ **Flanges** ASME B16.5
BW TO ASME B16.25
- ☐ **Testing** API 598
API 6D
BS 6755
- ☐ **Rating** ASME B16.34
- ☐ **Marking** MSS-SP 25
CE - PED
- ☐ **Certificates** EN 10204 – 3.1 B

PART NAME	W49xBK	L49xBK	M49xBK	C49xBK	B49xBK	E49xBK	D49xBK	F49xBK	H49xBK
1 Body	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
2 Cover	WCB	LCB	WC6	C5	C12	CF8	CF8C	CF8M	CF3M
3 Screen	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F304 (1)	F321 (1)	F316 (1)	F316L (1)
4 Bolts	B7	L7	B16	B16	B16	B8	B8	B8	B8
5 Nuts	2H	G4	G4	G4	G4	G8	G8	G8	G8
6 Gasket	ANSI 150 - 300 - 600 - 900 - 1500 : S.S. spiral wound reinf. Graphite / RTJ - ANSI 2500 : RTJ (2)								

(1) On request: other materials

(2) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

STRAINERS - BASKET TYPE

ASME 150 - 300 - 600 - 900 - 1500 - 2500

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 490BK - STRAINERS BASKET TYPE - ASME CLASS 150

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	---	---	---	---
L RF/BW	203	216	241	292	356	406	495	622	699	787	914	---	---	---	---
L RTJ	216	219	254	305	368	419	508	635	711	800	927	---	---	---	---
D	152	178	191	229	254	279	343	406	483	533	597	---	---	---	---
H	146	185	195	235	301	366	530	530	665	---	---	---	---	---	---
H1	222	274	285	350	440	537	733	733	880	---	---	---	---	---	---

FIG. N. 491BK - STRAINERS BASKET TYPE - ASME CLASS 300

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	---	---	---	---
L RF/BW	267	292	318	356	400	445	559	622	711	838	864	---	---	---	---
L RTJ	282	308	333	371	416	460	575	638	727	854	879	---	---	---	---
D	165	191	210	254	279	318	381	445	521	584	648	---	---	---	---
H	145	190	223	235	300	330	365	570	740	---	---	---	---	---	---
H1	228	290	328	362	450	489	555	892	1040	---	---	---	---	---	---

FIG. N. 492BK - STRAINERS BASKET TYPE - ASME CLASS 600

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	---	---	---	---
L RF/BW	292	330	356	432	508	559	660	787	838	889	991	---	---	---	---
L RTJ	295	333	359	435	511	562	663	790	841	892	994	---	---	---	---
D	165	191	210	273	330	356	419	508	559	603	686	---	---	---	---
H	185	210	230	290	370	425	470	---	---	---	---	---	---	---	---
H1	267	305	335	427	540	602	680	---	---	---	---	---	---	---	---

FIG. N. 493BK - STRAINERS BASKET TYPE - ASME CLASS 900

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---
L RF/BW	368	381	457	610	737	838	965	---	---
L RTJ	371	384	460	613	740	842	968	---	---
D	216	241	292	381	467	546	610	---	---
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

FIG. N. 494BK - STRAINERS BASKET TYPE - ASME CLASS 1500

SIZE	2"	3"	4"	6"	8"	10"	12"	---	---
L RF/BW	368	470	546	705	832	991	1130	---	---
L RTJ	371	473	549	711	842	1000	1146	---	---
D	216	267	311	394	483	584	673	---	---
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

FIG. N. 495BK - STRAINERS BASKET TYPE - ASME CLASS 2500

SIZE	2"	3"	4"	6"	8"	---	---	---	---
L RF/BW	451	578	673	914	1022	---	---	---	---
L RTJ	454	584	683	927	1038	---	---	---	---
D	235	305	356	483	552	---	---	---	---
H	---	---	---	---	---	---	---	---	---
H1	---	---	---	---	---	---	---	---	---

features on request

- ☐ SCREEN IN SPECIAL MATERIAL
- ☐ DISCHARGE VALVE
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ DIN CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED






A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESCRIPTION OF A TYPICAL GATE VALVE - BELLOW SEAL

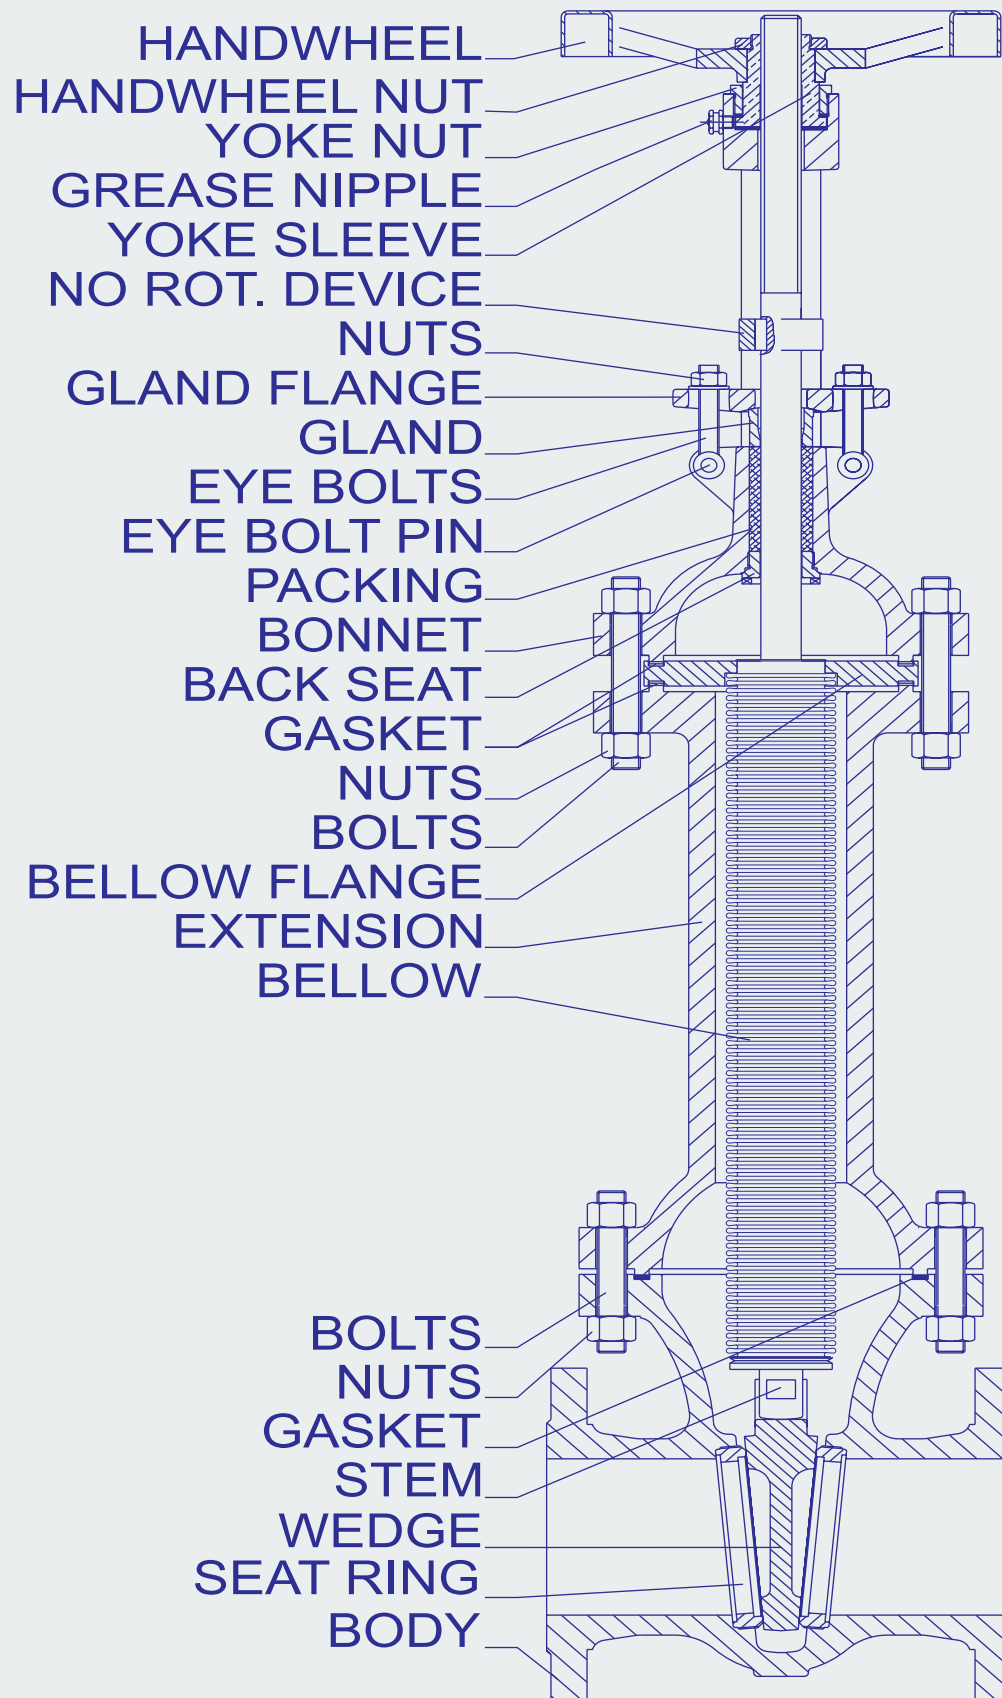

	TYPE	CLASS	SIZES	FIG. N
	GATE VALVES BOLTED BONNET OVAL TYPE	PN 16 - F4	50 - 900	1180
		PN 16 - F5	50 - 1400	1190
	GATE VALVES BOLTED BONNET ROUND TYPE	PN 16 PN 25 PN 40 PN 63 PN 100 PN 160	50 - 1400 50 - 1400 50 - 1000 50 - 600 50 - 600 50 - 400	1200 1210 1220 1230 1240 1250
	GATE VALVES CRYOGENIC EXTENDED BONNET	PN 16 PN 25 PN 40 PN 63 PN 100	50 - 600 50 - 600 50 - 600 50 - 600 50 - 600	1200EB 1210EB 1220EB 1230EB 1240EB
	GATE VALVES BELLOW SEAL	PN 16 PN 25 PN 40 PN 63 PN 100	50 - 600 50 - 600 50 - 600 50 - 600 50 - 600	1200SO 1210SO 1220SO 1230SO 1240SO
	GATE VALVES PRESSURE SEAL	PN 100 PN 160 PN 250 PN 320 PN 420	50 - 600 50 - 600 50 - 600 50 - 600 50 - 600	P24 P25 P26 P27 P28

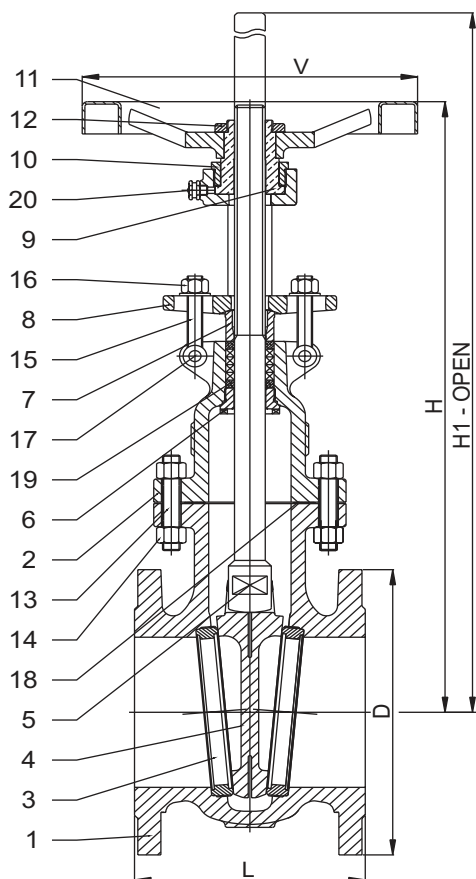


FIG. 1180 - DIN PN 16: Face to Face F4

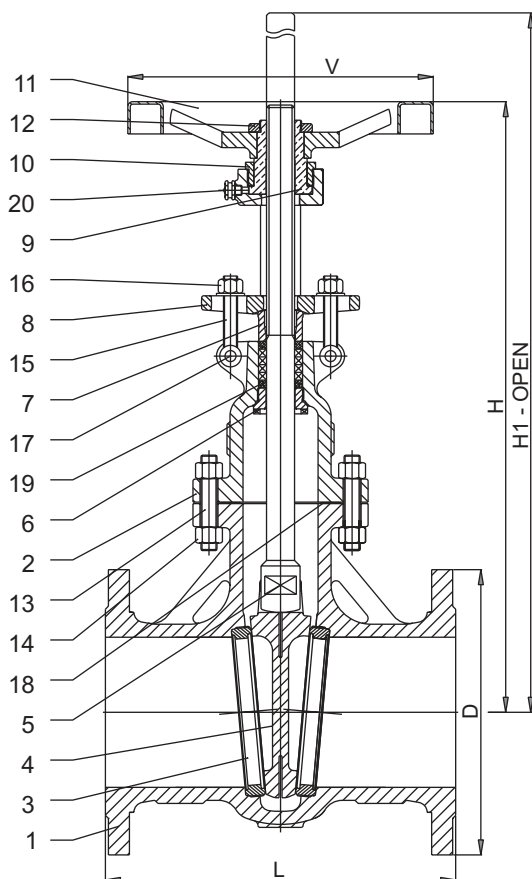


FIG. 1190 - DIN PN 16: Face to Face F5

PART NAME	A1180 - A1190	C1180 - C1190	FH1180 - FH1190	FK1180 - FK1190
1 Body	1.0619	1.7365	1.4552	1.4581
2 Bonnet	1.0619	1.7365	1.4552	1.4581
3 Seat ring surface	X20Cr13 (1)	X20Cr13 + HF (1)	X6CrNiTi18-10 (1)	X5CrNiMo17-12-2 (1)
4 Wedge seat surfaces	X20Cr13 (2)	X20Cr13 + HF (2)	X6CrNiTi18-10 (2)	X5CrNiMo17-12-2 (2)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
6 Back seat	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
7 Gland	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
8 Gland flange	1.0460	X5CrNiMo17-12-2	X6CrNiTi18-10	X5CrNiMo17-12-2
9 Yoke sleeve	MS58 (4)	MS58 (4)	MS58 (4)	MS58 (4)
10 Yoke nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
11 Handwheel (*)	← Steel →			
12 Handwheel nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
13 Bolts	CK35	21CrMoV57	A2-70	A2-70
14 Nuts	C35	24CrMo5	A2-70	A2-70
15 Eye bolts	CK35	24CrMo5	A2-70	A2-70
16 Nuts	C35	24CrMo5	A2-70	A2-70
17 Eye bolt pin	CK35	24CrMo5	A2-70	A2-70
18 Gasket	← S.S. reinforced graphite (5) →			
19 Packing	← Graphite rings & wiper rings (6) →			
20 Grease nipple	← Steel →			

(1) On request: faced with Stellite® - Mone® - Hastelloy® - other materials

(2) On request: faced with Stellite® - Mone® - Hastelloy® - other materials

(3) On request: 17 Cr - Mone® - Hastelloy® - other materials

(*) Gear operator recommended from DN 500.

(4) On request: GGG50 - Nitronic 60

(5) On request: PTFE - other materials

(6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.


 ISO 9001-2000
 CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
 NOTIFIED

 VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES OVAL BODY

DIN PN 16 - F4 - DIN PN 16 - F5

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 1180 - GATE VALVES OVAL BODY DIN PN 16 - Face to Face F4

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	--	--	--	--
L RF/BW	150	170	180	190	200	210	230	250	270	290	310	350	390	430	470	510	--	--	--	--
D	165	185	200	220	250	285	340	405	460	520	580	715	840	910	1025	1125	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	1000	1200	1200	--	--	--	--
H	350	420	500	520	610	700	900	1050	1200	1400	1580	1900	2300	2600	3200	4400	--	--	--	--
H1	415	495	580	620	720	840	1100	1300	1540	1750	1980	2450	3000	3500	4100	5500	--	--	--	--

FIG. N. 1190 - GATE VALVES OVAL BODY DIN PN 16 - Face to Face F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	900	1000	1100	1200	1400	1600
D	165	185	200	220	250	285	340	405	460	520	580	640	715	840	910	1025	1125	1255	1485	1685
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	1000	1200	1200	1200	1400	1400
H	350	430	500	520	610	700	900	1050	1200	1400	1580	1750	1900	2300	2600	3200	4400	4700	5200	6200
H1	415	495	580	620	720	840	1100	1300	1540	1750	1980	2200	2450	3000	3500	4100	5500	5900	6600	7900

standard features

- **Description** OVAL BODY
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
FLEXIBLE WEDGE
RENEWABLE SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2543
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- PTFE SOFT SEATS
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

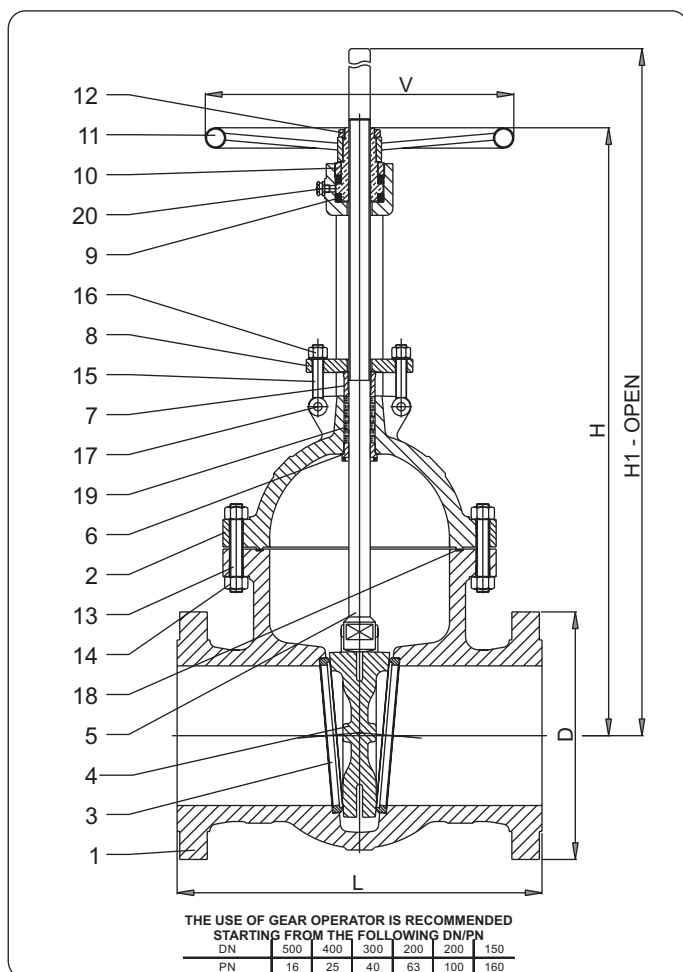

standard features

- **Description** ROUND BODY
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
FLEXIBLE WEDGE
RENEWABLE SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	A12xx	C12xx	FH12xx	FK12xx
1 Body	1.0619	1.7365	1.4552	1.4581
2 Bonnet	1.0619	1.7365	1.4552	1.4581
3 Seat ring surface	X20Cr13 (1)	X20Cr13 + HF (1)	X6CrNiTi18-10 (1)	X5CrNiMo17-12-2 (1)
4 Wedge seat surfaces	X20Cr13 (2)	X20Cr13 + HF (2)	X6CrNiTi18-10 (2)	X5CrNiMo17-12-2 (2)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
6 Back seat	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
7 Gland	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
8 Gland flange	1.0460	X5CrNiMo17-12-2	X6CrNiTi18-10	X5CrNiMo17-12-2
9 Yoke sleeve	MS58 (4)	MS58 (4)	MS58 (4)	MS58 (4)
10 Yoke nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
11 Handwheel		Steel		
12 Handwheel nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
13 Bolts	CK35	21CrMoV57	A2-70	A2-70
14 Nuts	C35	24CrMo5	A2-70	A2-70
15 Eye bolts	CK35	24CrMo5	A2-70	A2-70
16 Nuts	C35	24CrMo5	A2-70	A2-70
17 Eye bolt pin	CK35	24CrMo5	A2-70	A2-70
18 Gasket		S.S. Reinforced graphite (5)		
19 Packing		Graphite rings & wiper rings (6)		
20 Grease nipple		Steel		

- (1) On request: faced with Stellite® - Monei® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monei® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monei® - Hastelloy® - other materials

- (4) On request: GGG50 - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES ROUND BODY

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 1200 - GATE VALVES DIN PN 16 - Face to Face F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	900	1000	1100	1200	1400	1600
D	165	185	200	220	250	285	340	405	460	520	580	640	715	840	910	1025	1125	1255	1485	1685
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	1000	1200	1200	1200	1400	1400
H	400	420	500	520	610	620	780	1050	1200	1400	1580	1750	1900	2300	2600	3200	4400	4700	5200	6200
H1	470	495	580	620	720	760	980	1300	1540	1750	1980	2200	2450	3000	3500	4100	5500	5900	6600	7900

FIG. N. 1210 - GATE VALVES DIN PN 25 - Face to Face F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	900	1000	1100	1200	1400	1600
D	165	185	200	235	270	300	360	425	485	555	620	670	730	845	960	1085	1185	1320	1530	1755
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	1000	1200	1200	1200	1400	1400
H	400	430	500	520	610	700	900	1050	1200	1400	1580	1750	1900	2300	2600	3200	4400	4700	5200	6200
H1	470	495	580	620	720	840	1100	1300	1540	1750	1980	2200	2450	3000	3500	4100	5500	5900	6600	7900

FIG. N. 1220 - GATE VALVES DIN PN 40 - Face to Face F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	--	--
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1050	1150	1350	1550	1750	1950	2150	--	--
D	165	185	200	235	270	300	375	450	515	580	660	685	755	890	995	1140	1250	1360	--	--
V	200	200	225	250	300	400	500	500	600	700	700	800	1000	1200	1200	1400	1400	1400	--	--
H	400	430	500	520	610	700	900	1050	1200	1400	1580	1750	1900	2300	2600	3200	4400	4700	--	--
H1	470	495	580	620	720	840	1100	1300	1540	1750	1980	2200	2450	3000	3500	4100	5500	5900	--	--

FIG. N. 1230 - GATE VALVES DIN PN 63 - Face to Face F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	180	205	215	250	295	345	415	470	530	600	670	800	930
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
H	450	500	540	670	685	810	970	1155	1330	1500	1680	2100	2400
H1	500	570	620	780	810	980	1180	1420	1660	1880	2100	2650	3100

FIG. N. 1240 - GATE VALVES DIN PN 100 - Face to Face F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	195	220	230	265	315	355	430	505	585	655	715	870	990
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
H	450	500	540	670	685	810	970	1155	1330	1500	1680	2100	2400
H1	500	570	620	780	810	980	1180	1420	1660	1880	2100	2650	3100

FIG. N. 1250 - GATE VALVES DIN PN 160 - Face to Face F8

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	--	--
L RF/BW	300	360	390	450	525	600	750	900	1050	1200	1350	--	--
D	195	220	230	265	315	355	430	505	585	655	715	--	--
V	200	250	250	400	400	500	600	700	700	800	1000	--	--
H	450	500	540	670	685	810	970	1155	1330	1500	1680	--	--
H1	500	570	620	780	810	980	1180	1420	1660	1880	2100	--	--

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK
- PTFE SOFT SEATS
- STEM PROTECTION
- STEM EXTENSION
- LANTERN RING
- EXTENDED STUFFING BOX
- LIVE LOADED PACKING
- DRAIN PLUG
- BY PASS
- BW ENDS
- ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** EXTENDED BONNET
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

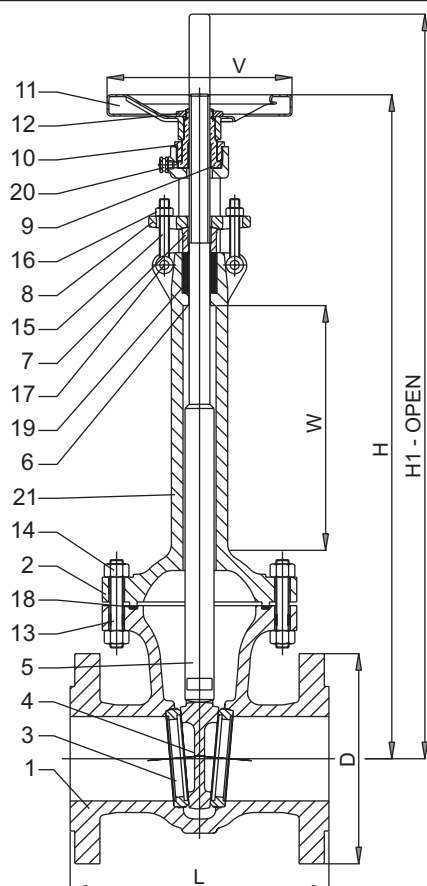





THE USE OF GEAR OPERATOR IS RECOMMENDED
STARTING FROM THE FOLLOWING DN/PN

DN	500	400	300	200	200
PN	16	25	40	63	100

PART NAME	FH12xxEB	FK12xxEB
1 Body	1.4552	1.4581
2 Bonnet	1.4552	1.4581
3 Seat ring surface	X6CrNiTi18-10 (1)	X5CrNiMo17-12-2 (1)
4 Wedge seat surfaces	X6CrNiTi18-10 (2)	X5CrNiMo17-12-2 (2)
5 Stem	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
6 Back seat (integral)	1.4552	1.4581
7 Gland	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
8 Gland flange	X6CrNiTi18-10	X5CrNiMo17-12-2
9 Yoke sleeve	MS58 (4)	MS58 (4)
10 Yoke nut	X6CrNiTi18-10	X5CrNiMo17-12-2
11 Handwheel	Steel	Steel
12 Handwheel nut	X6CrNiTi18-10	X5CrNiMo17-12-2
13 Bolts	A2-70	A2-70
14 Nuts	A2-70	A2-70
15 Eye bolts	A2-70	A2-70
16 Nuts	A2-70	A2-70
17 Eye bolt pin	A2-70	A2-70
18 Gasket	PTFE (5)	PTFE (5)
19 Packing	PTFE (6)	PTFE (6)
20 Grease nipple	1.4404	1.4404
21 Extension	X2CrNi19-11	X2CrNiMo17-12-2

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

options



- (4) On request: GGG50 - Nitronic 60
 (5) On request: Graphite - other materials
 (6) On request: Graphite - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

CRYOGENIC GATE VALVES

DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 1200EB - CRYOGENIC GATE VALVES DIN PN 16 - F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	--	--	--	--	--	--
D	165	185	200	220	250	285	340	405	460	520	580	640	715	840	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--	--	--	--	--	--
H	600	630	800	820	910	920	1080	1350	1500	1700	1880	2050	2200	2600	--	--	--	--	--	--
H1	650	695	880	920	1020	1060	1280	1600	1840	2050	2280	2500	2750	3300	--	--	--	--	--	--

FIG. N. 1210EB - CRYOGENIC GATE VALVES DIN PN 25 - F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	--	--	--	--	--	--
D	165	185	200	235	270	300	360	425	485	555	620	670	730	845	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--	--	--	--	--	--
H	600	630	800	820	910	1000	1200	1350	1500	1700	1880	2050	2200	2600	--	--	--	--	--	--
H1	650	695	880	920	1020	1140	1400	1600	1840	2050	2280	2500	2750	3300	--	--	--	--	--	--

FIG. N. 1220EB - CRYOGENIC GATE VALVES DIN PN 40 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1050	1150	1350	--	--	--	--	--	--
D	165	185	200	235	270	300	375	450	515	580	660	685	755	890	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
W	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--	--	--	--	--	--
H	600	630	800	820	910	1000	1200	1350	1500	1700	1880	2050	2200	2600	--	--	--	--	--	--
H1	650	695	880	920	1020	1140	1400	1600	1840	2050	2280	2500	2750	3300	--	--	--	--	--	--

FIG. N. 1230EB - CRYOGENIC GATE VALVES DIN PN 63 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	180	205	215	250	295	345	415	470	530	600	670	800	930
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
W	200	200	300	300	300	300	300	300	300	300	300	300	300
H	650	700	840	970	985	1110	1270	1455	1630	1800	1980	2400	2700
H1	700	770	920	1080	1110	1280	1480	1720	1960	2180	2400	2950	3400

FIG. N. 1240EB - CRYOGENIC GATE VALVES DIN PN 100 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	195	220	230	265	315	355	430	505	585	655	715	870	990
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
W	200	200	300	300	300	300	300	300	300	300	300	300	300
H	650	700	840	970	985	1110	1270	1455	1630	1800	1980	2400	2700
H1	700	770	920	1080	1110	1280	1480	1720	1960	2180	2400	2950	3400

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** EXTENDED BODY
BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
RENEWABLE SEATS
BELLOW SEAL
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

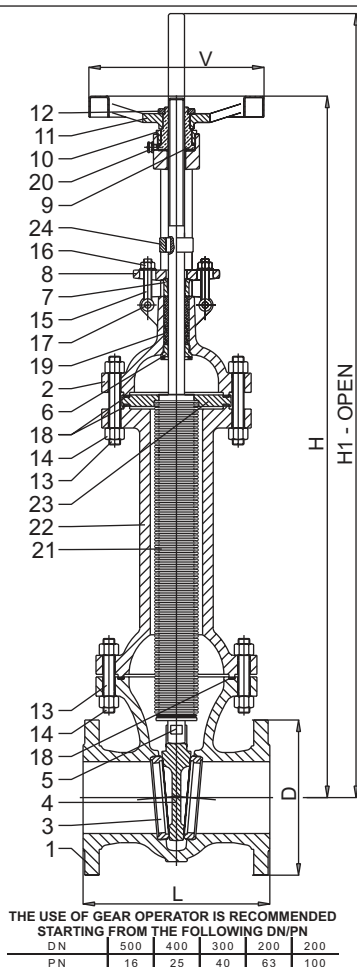

PART NAME	A12xxSO	C12xxSO	FH12xxSO	FK12xxSO
1 Body	1.0619	1.7365	1.4552	1.4581
2 Bonnet	1.0619	1.7365	1.4552	1.4581
3 Seat ring surface	X20Cr13 (1)	X20Cr13 + HF (1)	X6CrNiTi18-10 (1)	X5CrNiMo17-12-2 (1)
4 Wedge seat surfaces	X20Cr13 (2)	X20Cr13 + HF (2)	X6CrNiTi18-10 (2)	X5CrNiMo17-12-2 (2)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
6 Back seat	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
7 Gland	X20Cr13 (3)	X20Cr13 (3)	X6CrNiTi18-10 (3)	X5CrNiMo17-12-2 (3)
8 Gland flange	1.0460	X5CrNiMo17-12-2	X6CrNiTi18-10	X5CrNiMo17-12-2
9 Yoke sleeve		← MS58 (4) →		
10 Yoke nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
11 Handwheel		← Steel →		
12 Handwheel nut	1.0460	1.0460	X6CrNiTi18-10	X5CrNiMo17-12-2
13 Bolts	CK35	21CrMoV57	A2-70	A2-70
14 Nuts	C35	24CrMo5	A2-70	A2-70
15 Eye bolts	CK35	24CrMo5	A2-70	A2-70
16 Nuts	C35	24CrMo5	A2-70	A2-70
17 Eye bolt pin	CK35	24CrMo5	A2-70	A2-70
18 Gasket		← S.S. reinforced graphite (5) →		
19 Packing		← Graphite rings & wiper rings (6) →		
20 Grease nipple		← Steel →		
21 Bellow	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10
22 Extension	1.0460	1.7363	X6CrNiNb18-10	X2CrNiMo17-12-2
23 Bellow flange		← X6CrNiTi18-10 →		
24 No rot. Device	X20Cr13	X20Cr13	X6CrNiTi18-10	X5CrNiMo17-12-2

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: GGG50 - Nitronic 60
 (5) On request: PTFE - other materials
 (6) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GATE VALVES - BELLOW SEAL DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. N. 1200SO - BELLOW GATE VALVES DIN PN 16 - F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	--	--	--	--	--	--
D	165	185	200	220	250	285	340	405	460	520	580	640	715	840	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
H	610	675	820	940	1160	1530	1960	2530	2600	2980	3170	2550	4050	4650	--	--	--	--	--	--
H1	660	740	900	1040	1290	1680	2160	2600	2900	3350	3570	4000	4550	5250	--	--	--	--	--	--

FIG. N. 1210SO - BELLOW GATE VALVES DIN PN 25 - F5

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	270	280	300	325	350	400	450	500	550	600	650	700	800	--	--	--	--	--	--
D	165	185	200	235	270	300	360	425	485	555	620	670	730	845	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
H	610	675	820	940	1160	1530	1960	2530	2600	2980	3170	2550	4050	4650	--	--	--	--	--	--
H1	660	740	900	1040	1290	1680	2160	2600	2900	3350	3570	4000	4550	5250	--	--	--	--	--	--

FIG. N. 1220SO - BELLOW GATE VALVES DIN PN 40 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1050	1150	1350	--	--	--	--	--	--
D	165	185	200	235	270	300	375	450	515	580	660	685	755	890	--	--	--	--	--	--
V	200	200	225	250	280	300	400	500	500	600	600	600	600	600	--	--	--	--	--	--
H	600	685	765	920	1070	1315	1700	2035	2395	2760	3135	3600	4080	4795	--	--	--	--	--	--
H1	650	750	840	1020	1200	1465	1900	2285	2700	3110	4535	4050	4580	5350	--	--	--	--	--	--

FIG. N. 1230SO - BELLOW GATE VALVES DIN PN 63 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	180	205	215	250	295	345	415	470	530	600	670	800	930
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
H	650	685	805	905	1070	1360	1720	2120	2500	--	--	--	--
H1	700	750	880	1010	1200	1510	1920	2370	2800	--	--	--	--

FIG. N. 1240SO - BELLOW GATE VALVES DIN PN 100 - F7

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600
L RF/BW	250	290	310	350	400	450	550	650	750	850	950	1150	1350
D	195	220	230	265	315	355	430	505	585	655	715	870	990
V	200	250	250	400	400	500	600	700	700	800	1000	1000	1200
H	650	685	805	905	1070	1360	1720	2120	2500	--	--	--	--
H1	700	750	880	1010	1200	1510	1920	2370	2800	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** ROUND BODY
PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
WELDED IN SEATS
FLEXIBLE WEDGE
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

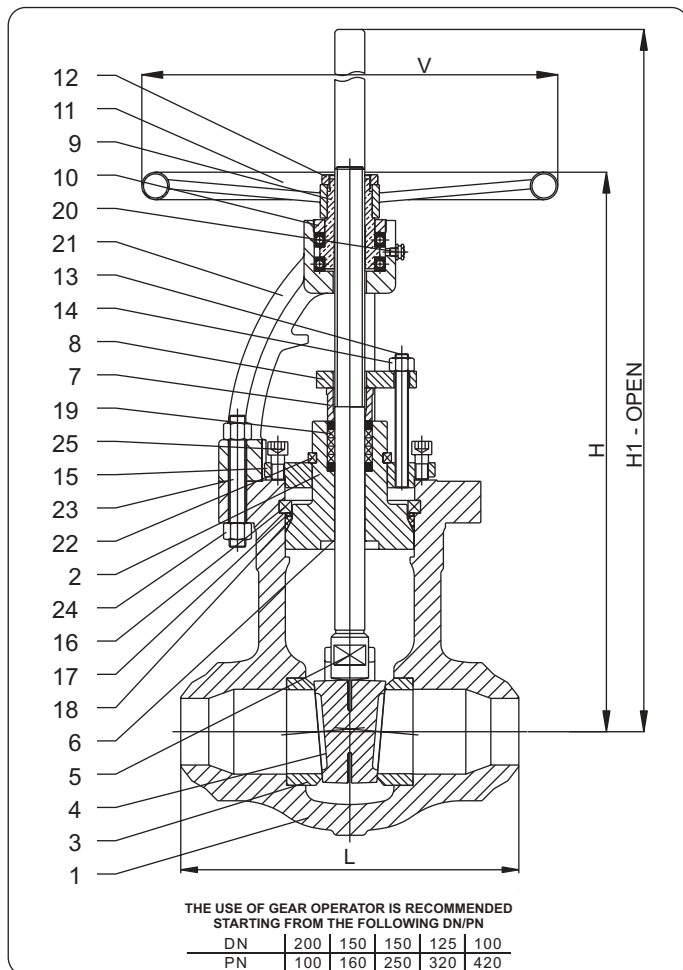

PART NAME	AP2x	IP2x	MP2x	WCP2x	FKP2x
1 Body	1.0619	1.5419	1.7357	1.7379	1.4581
2 Bonnet	1.0619	1.5419	1.7357	1.7379	1.4581
3 Ring - seat surface	1.0160 + HF (1)	1.0160 + HF (1)	1.0460 + HF (1)	1.0160 + HF (1)	1.4401 + HF(1)
4 Wedge - seat surfaces	1.0619 + HF (1)	1.5419 + HF (1)	1.7357 + HF (1)	1.7380 + HF (1)	1.4581 + HF (1)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)	1.4401 (3)
6 Back seat (integral)		← Stellite® (2) →			
7 Gland	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)	1.4401 (3)
8 Gland flange	1.0460	1.4401	1.4401	1.4401	1.4401
9 Yoke sleeve		← GGG50 (4) →			
10 Yoke nut	1.0460	1.0460	1.0460	1.0460	1.4401
11 Handwheel		← Steel →			
12 Handwheel nut		← 1.0460' →			
13 Bolts	CK35	21CrMoV57	21CrMoV57	21CrMoV57	A2-70
14 Nuts	C35	24CrMo5	24CrMo5	24CrMo5	A2-70
15 Retainer flange	1.0160	1.0160	1.0460	1.0160	1.4401
16 Retainer ring	X20Cr13	X20Cr13	X20Cr13	X20Cr13	1.4401
17 Spacer ring	X20Cr13	X20Cr13	X20Cr13	X20Cr13	1.4401
18 Gasket		← S. S. reinforced graphite (5) →			
19 Packing		← Graphite rings & wiper rings →			
20 Grease nipple		← Steel →			
21 Yoke	1.0619	1.5419	1.7357	1.7380	1.4581
22 Segmented support ring	X20Cr13	X20Cr13	X20Cr13	X20Cr13	1.4401
23 Yoke / body bolt	CK35	21CrMoV57	21CrMoV57	21CrMoV57	A2-70
24 Yoke / body nut	C35	24CrMo5	24CrMo5	24CrMo5	A2-70
25 Bolt	CK35	21CrMoV57	21CrMoV57	21CrMoV57	A2-70

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

- (4) On request: Other materials
 (5) On request: Metal

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PRESSURE SEAL GATE VALVES DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P24 - PRESSURE SEAL GATE VALVES DIN PN 100 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	560	670	700	720	1010	1040	1240	1610	1820	--	--	--	--

FIG. P25 - PRESSURE SEAL GATE VALVES DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	560	670	700	720	1010	1040	1240	1610	1820	--	--	--	--

FIG. P26 - PRESSURE SEAL GATE VALVES DIN PN 250 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	560	670	700	720	1010	1040	1240	1610	1820	--	--	--	--

FIG. P27 - PRESSURE SEAL GATE VALVES DIN PN 320 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	560	670	700	720	1010	1040	1240	1610	1820	--	--	--	--

FIG. P28 - PRESSURE SEAL GATE VALVES DIN PN 420 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	560	670	700	720	1010	1040	1240	1610	1820	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC OR HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ PARALLEL WEDGE
- ☐ TWO PIECE BODY GUIDED WEDGE
- ☐ STEM PROTECTION
- ☐ STEM EXTENSION
- ☐ LANTERN RING
- ☐ EXTENDED STUFFING BOX
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BY PASS
- ☐ FLANGED ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED









A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com


DESCRIPTION OF A TYPICAL GLOBE VALVE - BELLOW SEAL

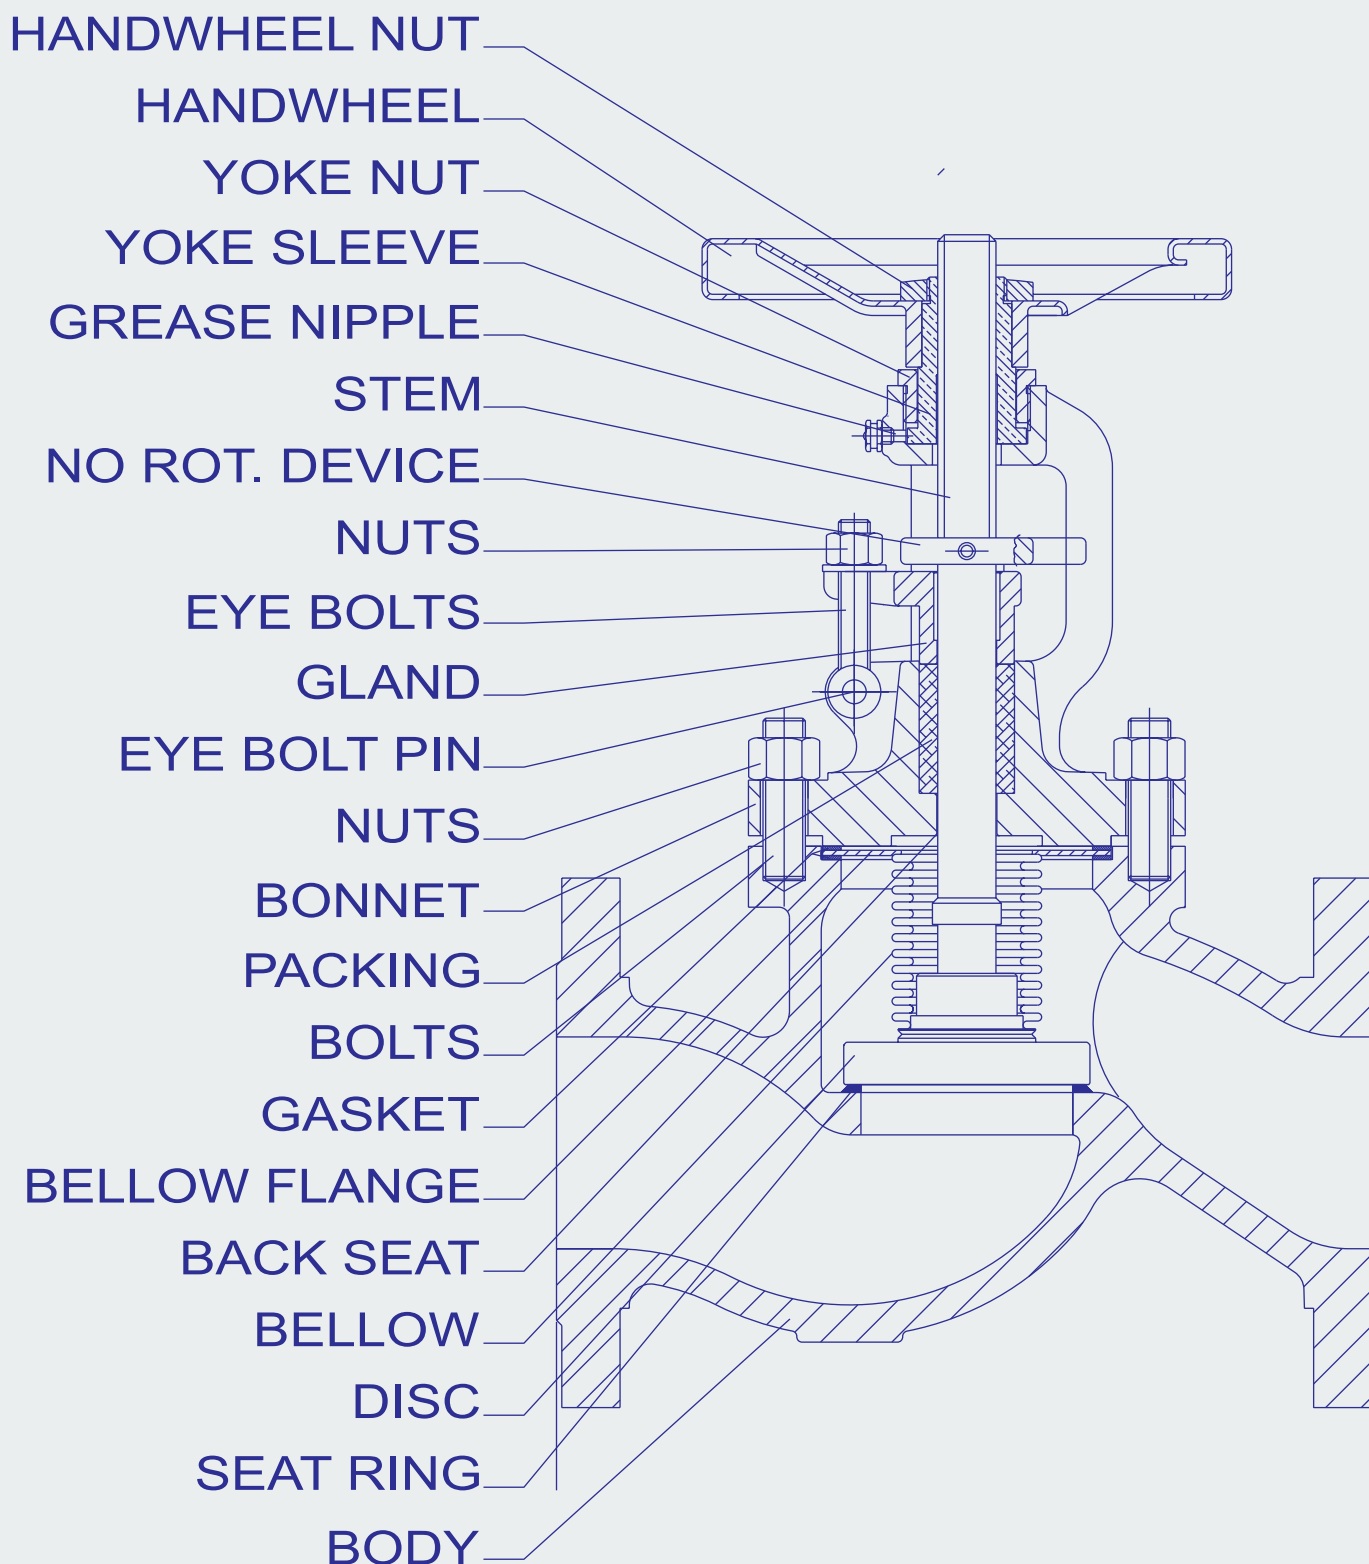

TYPE	CLASS	SIZES	FIG. N.	TYPE	CLASS	SIZES	FIG. N.
GLOBE VALVES BELLOW SEAL 	PN16/25	15 - 600	1800	GLOBE VALVES BOLTED BONNET 	PN16	15 - 600	1401
	PN 25/40	15 - 600	1670		PN 25/40	15 - 600	1430
	PN 63	15 - 600	1560SO		PN 63	15 - 600	1560
	PN 100	15 - 300	1570SO		PN 100	15 - 300	1570
page 78				page 72			
GLOBE VALVES 90° ANGLE BELLOW SEAL 	PN16	15 - 600	1810	GLOBE VALVES 90° ANGLE BOLTED BONNET 	PN16	15 - 600	1410
	PN 25/40	15 - 600	1680		PN 25/40	15 - 600	1440
	PN 63	15 - 600	1560ASO		PN 63	15 - 600	1560A
	PN 100	15 - 300	1570ASO		PN 100	15 - 300	1570A
page 80				page 74			
GLOBE VALVES Y TYPE BELLOW SEAL 	PN 40	50 - 600	1432SO	GLOBE VALVES Y TYPE BOLTED BONNET 	PN16	15 - 600	1403
	PN 63	50 - 600	1560YSO		PN 25/40	15 - 600	1432
	PN 100	50 - 300	1570YSO		PN 63	15 - 600	1560Y
page 82					page 76		
GLOBE VALVES Y TYPE PRESSURE SEAL 	PN 100	50 - 600	P182	GLOBE VALVES PRESSURE SEAL 	PN 100	50 - 600	P162
	PN 160	50 - 600	P183		PN 160	50 - 600	P163
	PN 250	50 - 600	P184		PN 250	50 - 600	P164
	PN 320	50 - 600	P185		PN 320	50 - 600	P165
	PN 420	50 - 600	P186		PN 420	50 - 600	P166
page 88				page 86			
				GLOBE VALVES CRYOGENIC 	PN 25/40	15 - 600	1430EB
					PN 63	15 - 600	1560EB
					PN 100	15 - 300	1570EB
				page 84			
				71			

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
LOOSE DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

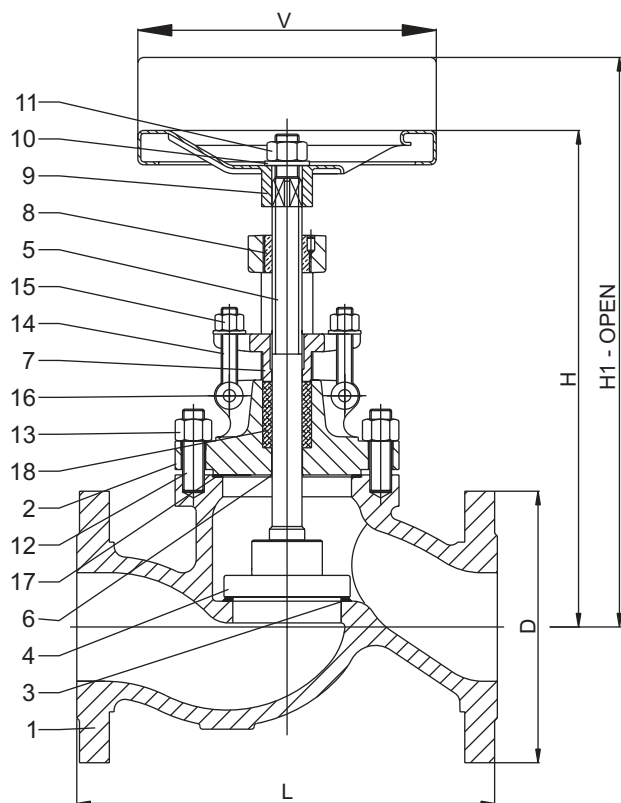

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δp bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	G1401 - (CAST IRON)	A1430-A1560 A1570-A1580	FK1430-FK1560-FK1570-FK1580
1 Body	EN-GJL 250	1.0619 (A)	1.4581
2 Bonnet	EN-GJL 250	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X20Cr13 (1) overlay	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (1)	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	EN-GJL 250	1.0619 (B)	1.4581
7 Gland	1.0460	1.0460	X5CrNiMo17-12-2
8 Yoke sleeve	N/A	MS58 (3)	MS58 (3)
9 Handwheel	Steel	Steel	Steel
10 Plate	1.0460	1.0460	1.0460
11 Handwheel nut	1.0460	1.0460	X5CrNiMo17-12-2
12 Bolts	CK35	CK35	A2-70
13 Nuts	C35	C35	A2-70
14 Eye bolts	CK35	CK35	A2-70
15 Nuts	C35	C35	A2-70
16 Eye bolt pin	CK35	CK35	A2-70
17 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
18 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 50 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - BOLTED BONNET

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1401 - GLOBE VALVES BOLTED BONNET DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	160	165	190	200	225	260	280	320	375	415	460	550	570	750	900	1040	1290	1400	1600	
H1	164	170	197	208	235	273	297	340	400	447	498	594	620	813	975	1128	1390	1513	1725	

FIG.1430 - GLOBE VALVES BOLTED BONNET DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	160	165	190	200	225	260	280	320	375	415	460	550	570	750	900	1040	1290	1400	1600	--
H1	164	170	197	208	235	273	297	340	400	447	498	594	620	813	975	1128	1390	1513	1725	--

FIG. 1560 - GLOBE VALVES BOLTED BONNET DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
H	250	310	310	330	350	380	410	460	490	550	610	700	750	800	930	--	--	--	--	--
H1	254	315	317	338	360	393	427	480	515	582	648	744	800	863	1005	--	--	--	--	--

FIG. 1570 - GLOBE VALVES BOLTED BONNET DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
H	250	310	310	330	350	400	480	510	580	600	630	720	780	830	970	--	--	--	--	--
H1	254	315	317	338	360	413	497	530	605	632	668	764	830	893	1045	--	--	--	--	--

FIG. 1580 - GLOBE VALVES BOLTED BONNET DIN PN 160 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	390	430	515	585	--	--	--	--	--
V	150	150	150	200	200	200	250	300	400	500	500	600	700	700	800	--	--	--	--	--
H	250	310	310	355	355	400	--	--	--	--	--	--	--	--	--	--	--	--	--	--
H1	254	315	317	363	365	413	--	--	--	--	--	--	--	--	--	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

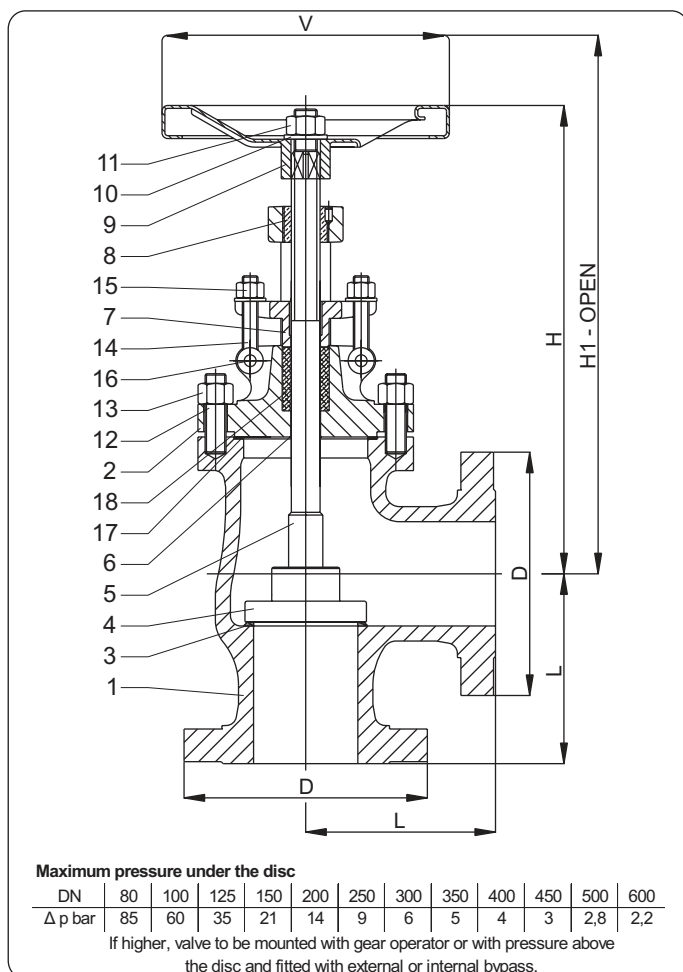

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
LOOSE DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	G1410 - (CAST IRON)	A1440 - A1560A - A1570A	FK1440 - FK1560A - FK1570A
1 Body	EN-GJL 250	1.0619 (A)	1.4581
2 Bonnet	EN-GJL 250	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X20Cr13 (1) overlay	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (1)	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	EN-GJL 250	1.0619 (B)	1.4581
7 Gland	1.0460	1.0460	X5CrNiMo17-12-2
8 Yoke sleeve	N/A	MS58 (3)	MS58 (3)
9 Handwheel	Steel	Steel	Steel
10 Plate	1.0460	1.0460	1.0460
11 Handwheel nut	1.0460	1.0460	X5CrNiMo17-12-2
12 Bolts	CK35	CK35	A2-70
13 Nuts	C35	C35	A2-70
14 Eye bolts	CK35	CK35	A2-70
15 Nuts	C35	C35	A2-70
16 Eye bolt pin	CK35	CK35	A2-70
17 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
18 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 50 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - 90° ANGLE DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1410 - GLOBE VALVES - 90° ANGLE - DIN PN 16 - CAST IRON - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	160	165	190	200	225	260	280	320	375	415	460	550	570	750	900	1040	1290	1400	1600	
H1	164	170	197	208	235	273	297	340	400	447	498	594	620	813	975	1128	1390	1513	1725	

FIG. 1440 - GLOBE VALVES - 90° ANGLE - DIN PN 25 / 40 - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	160	165	190	200	225	260	280	320	375	415	460	550	570	750	900	1040	1290	1400	1600	--
H1	164	170	197	208	235	273	297	340	400	447	498	594	620	813	975	1128	1390	1513	1725	--

FIG. 1560A - GLOBE VALVES - 90° ANGLE - DIN PN 63 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	515	575	700	--	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
H	250	310	310	330	350	380	410	460	490	550	610	700	750	800	930	--	--	--	--	--
H1	254	315	317	338	360	393	427	480	515	582	648	744	800	863	1005	--	--	--	--	--

FIG. 1570A - GLOBE VALVES - 90° ANGLE - DIN PN 100 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
H	250	310	310	330	350	400	480	510	580	600	630	720	780	830	970	--	--	--	--	--
H1	254	315	317	338	360	413	497	530	605	632	668	764	830	893	1045	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM

- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

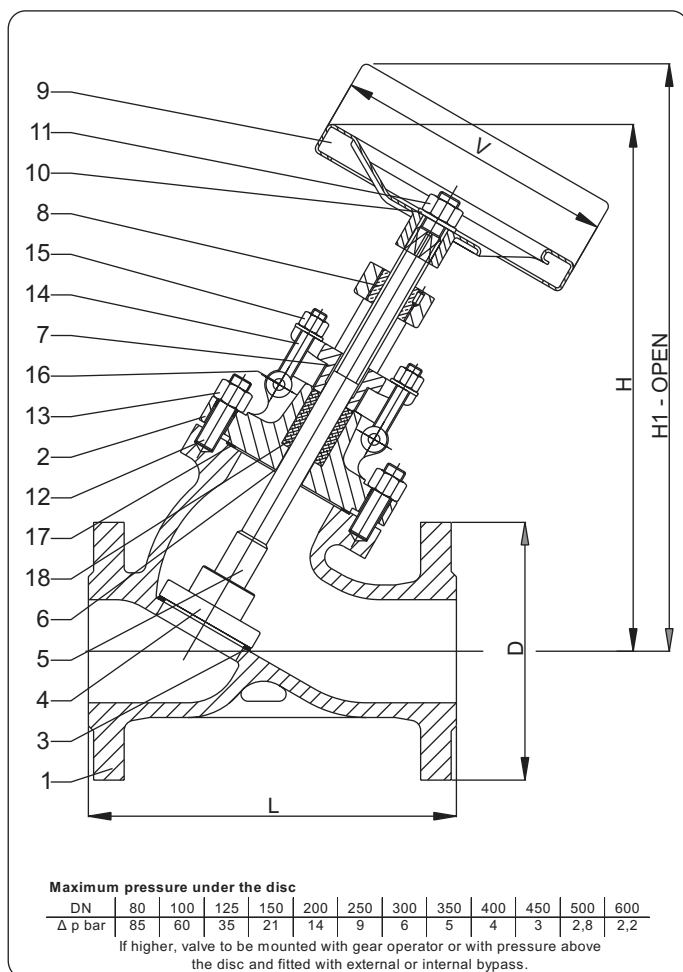

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
LOOSE DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	G1403 - (CAST IRON)	A1432 - A1560Y - A1570Y	FK1432 - FK1560Y - FK1570Y
1 Body	EN-GJL 250	1.0619 (A)	1.4581
2 Bonnet	EN-GJL 250	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X20Cr13 (1) overlay	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (1)	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	EN-GJL 250	1.0619 (B)	1.4581
7 Gland	1.0460	1.0460	X5CrNiMo17-12-2
8 Yoke sleeve	N/A	MS58 (3)	MS58 (3)
9 Handwheel	Steel	Steel	Steel
10 Plate	1.0460	1.0460	1.0460
11 Handwheel nut	1.0460	1.0460	X5CrNiMo17-12-2
12 Bolts	CK35	CK35	A2-70
13 Nuts	C35	C35	A2-70
14 Eye bolts	CK35	CK35	A2-70
15 Nuts	C35	C35	A2-70
16 Eye bolt pin	CK35	CK35	A2-70
17 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
18 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN < 40 and DN < 25 = 1.0460

For PN > 63 and DN < 25 = 1.0460

(B) For PN < 40 and DN < 80 = 1.0460

For PN > 63 and DN < 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - 'Y' TYPE DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1403 - GLOBE VALVES - Y TYPE - DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	180	190	210	250	290	340	380	450	500	570	650	770	840	950	1100	1250	1500	1650	1850	
H1	184	195	217	258	300	353	397	470	525	602	688	814	890	1013	1175	1338	1600	1763	1975	

FIG. 1432 - GLOBE VALVES - Y TYPE - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	180	190	210	250	290	340	380	450	500	570	650	770	840	950	1100	1250	1500	1650	1850	--
H1	184	195	217	258	300	353	397	470	525	602	688	814	890	1013	1175	1338	1600	1763	1975	--

FIG. 1560Y - GLOBE VALVES - Y TYPE - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
H	272	338	332	385	422	468	520	603	628	721	819	942	1047	1020	1150	--	--	--	--	--
H1	276	343	339	393	432	481	537	623	653	753	857	986	1097	1083	1225	--	--	--	--	--

FIG. 1570Y - GLOBE VALVES - Y TYPE - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
H	275	341	335	391	430	497	601	668	732	789	860	987	1107	1072	1212	--	--	--	--	--
H1	279	346	342	399	440	510	618	688	757	821	898	1031	1157	1135	1287	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

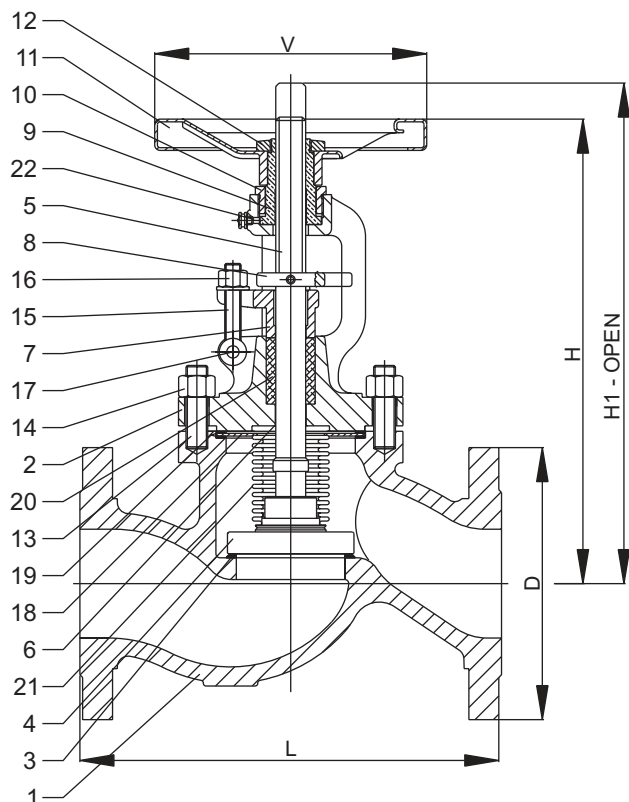

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δp bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	S1800 - (NODULAR IRON)	A1670 - A1560SO - A1570SO	FK1670 - FK1560SO - FK1570SO
1 Body	EN-GJS-400-18-LT	1.0619 (A)	1.4581
2 Bonnet	EN-GJS-400-18-LT	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X20Cr13 (1) overlay	1.4581 (1)
4 Disc seat surface	X20Cr13 (1)	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	EN-GJS-400-18-LT	1.0619 (B)	1.4581
7 Gland	1.0460	1.0460	X5CrNiMo17-12-2
8 No rot. Device	X20Cr13	X20Cr13	X5CrNiMo17-12-2
9 Yoke sleeve	N/A	MS58 (3)	MS58 (3)
10 Yoke nut	1.0460	1.0460	X5CrNiMo17-12-2
11 Handwheel	Steel	Steel	Steel
12 Handwheel nut	1.0460	1.0460	X5CrNiMo17-12-2
13 Bolts	CK35	CK35	A2-70
14 Nuts	C35	C35	A2-70
15 Eye bolts	CK35	CK35	A2-70
16 Nuts	C35	C35	A2-70
17 Eye bolt pin	CK35	CK35	A2-70
18 Bellow flange	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10
19 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
20 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)
21 Bellow	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10
22 Grease nipple	Steel	Steel	Steel

(1) On request: faced with Stellite® - Monei® - Hastelloy® - other materials

(2) On request: 17 Cr - Monei® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 50 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES BELLOW SEAL DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1800 - GLOBE VALVES BELLOW SEAL - DIN PN 16 / 25 - NODULAR IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	180	190	210	250	290	340	380	450	500	570	650	770	840	950	1100	1250	1500	1650	1850	--
H1	184	195	217	258	300	353	397	470	525	602	688	814	890	1013	1175	1338	1600	1763	1975	--

FIG. 1670 - GLOBE VALVES BELLOW SEAL - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	210	220	220	220	240	270	310	350	400	460	510	600	630	810	950	1100	1350	1460	1660	--
H1	214	225	227	228	250	283	327	370	425	492	548	594	680	813	925	1088	1300	1513	1725	--

FIG. 1560SO - GLOBE VALVES BELLOW SEAL - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
H	300	360	360	380	400	430	460	510	540	610	670	760	810	860	990	--	--	--	--	--
H1	304	365	367	388	410	443	477	530	565	642	708	804	860	923	1065	--	--	--	--	--

FIG. 1570SO - GLOBE VALVES BELLOW SEAL - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
H	300	360	360	380	400	450	530	560	630	660	690	780	840	890	1030	--	--	--	--	--
H1	304	365	367	388	410	463	547	580	655	692	728	824	890	953	1105	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

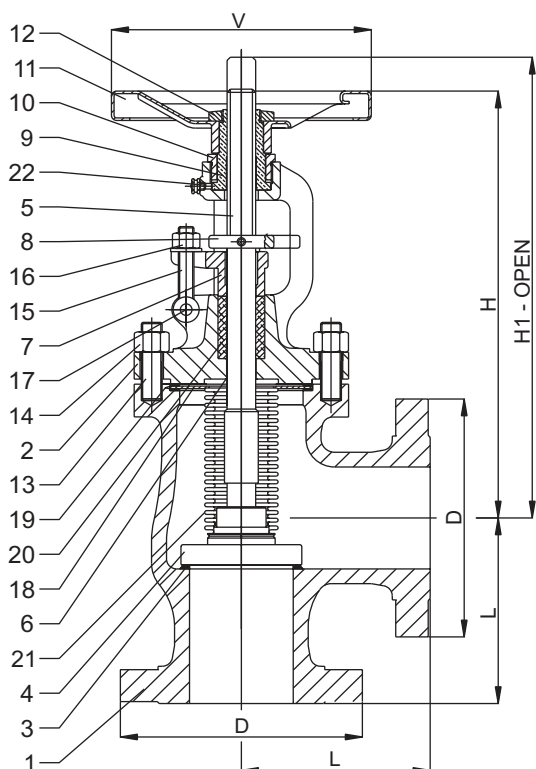

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δp bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	S1810 - (NODULAR IRON)	A1680-A1560ASO-A1570ASO	FK1680-FK1560ASO-FK1570ASO
1 Body	EN-GJS-400-18-LT	1.0619 (A)	1.4581
2 Bonnet	EN-GJS-400-18-LT	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X20Cr13 (1) overlay	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (1)	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	EN-GJS-400-18-LT	1.0619 (B)	1.4581
7 Gland	1.0460	1.0460	X5CrNiMo17-12-2
8 No rot. Device	X20Cr13	X20Cr13	X5CrNiMo17-12-2
9 Yoke sleeve	N/A	MS58 (3)	MS58 (3)
10 Yoke nut	1.0460	1.0460	X5CrNiMo17-12-2
11 Handwheel	Steel	Steel	Steel
12 Handwheel nut	1.0460	1.0460	X5CrNiMo17-12-2
13 Bolts	CK35	CK35	A2-70
14 Nuts	C35	C35	A2-70
15 Eye bolts	CK35	CK35	A2-70
16 Nuts	C35	C35	A2-70
17 Eye bolt pin	CK35	CK35	A2-70
18 Bellow flange	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10
19 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
20 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)
21 Bellow	X6CrNiTi18-10	X6CrNiTi18-10	X6CrNiTi18-10
22 Grease nipple	Steel	Steel	Steel

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 50 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES BELLOW SEAL - 90° ANGLE DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1810 - GLOBE VALVES BELLOW SEAL - 90° ANGLE - DIN PN 16 / 25 - NODULAR IRON - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	180	190	210	250	290	340	380	450	500	570	650	770	840	950	1100	1250	1500	1650	1850	--
H1	184	195	217	258	300	353	397	470	525	602	688	814	890	1013	1175	1338	1600	1763	1975	--

FIG. 1680 - GLOBE VALVES BELLOW SEAL - 90° ANGLE - DIN PN 25 / 40 - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	210	220	220	220	240	270	310	350	400	460	510	600	630	810	950	1100	1350	1460	1660	--
H1	214	225	227	228	250	283	327	370	425	492	548	594	680	813	925	1088	1300	1513	1725	--

FIG. 1560ASO - GLOBE VALVES BELLOW SEAL - 90° ANGLE - DIN PN 63 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	515	575	700	--	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
H	300	360	360	380	400	430	460	510	540	610	670	760	810	860	990	--	--	--	--	--
H1	304	365	367	388	410	443	477	530	565	642	708	804	860	923	1065	--	--	--	--	--

FIG. 1570ASO - GLOBE VALVES BELLOW SEAL - 90° ANGLE - DIN PN 100 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
H	300	360	360	380	400	450	530	560	630	660	690	780	840	890	1030	--	--	--	--	--
H1	304	365	367	388	410	463	547	580	655	692	728	824	890	953	1105	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

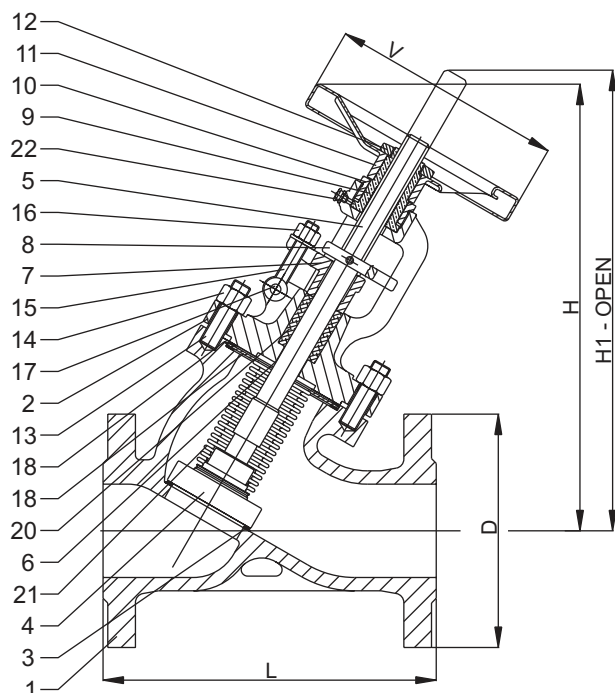

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δ p bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	A1432SO - A1560YSO - A1570YSO	FK1432SO - FK1560YSO - FK1570YSO
1 Body	1.0619 (A)	1.4581
2 Bonnet	1.0619 (B)	1.4581
3 Seat surface	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
5 Stem	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	1.0619 (B)	1.4581
7 Gland	1.0460	X5CrNiMo17-12-2
8 No rot. Device	X20Cr13	X5CrNiMo17-12-2
9 Yoke sleeve	MS58 (3)	MS58 (3)
10 Yoke nut	1.0460	X5CrNiMo17-12-2
11 Handwheel	Steel	Steel
12 Handwheel nut	1.0460	X5CrNiMo17-12-2
13 Bolts	CK35	A2-70
14 Nuts	C35	A2-70
15 Eye bolts	CK35	A2-70
16 Nuts	C35	A2-70
17 Eye bolt pin	CK35	A2-70
18 Bellow flange	X6CrNiTi18-10	X6CrNiTi18-10
19 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
20 Packing	Graphite rings & wiper rings (4)	Graphite rings & wiper rings (4)
21 Bellow	X6CrNiTi18-10	X6CrNiTi18-10
22 Grease nipple	Steel	Steel

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials

(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

(3) On request: GGG50

(4) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 25 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES BELLOW SEAL - 'Y' TYPE **DIN PN 25 - 40 - 63 - 100**

VALVOSIDER
 MANUFACTURER OF VALVES

FIG. 1432SO - GLOBE VALVES BELLOW SEAL - Y TYPE - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
H	230	240	260	300	340	390	430	500	550	630	710	830	900	1010	1160	1310	1560	1710	1910	-
H1	234	245	267	308	350	403	447	520	575	662	748	874	950	1073	1235	1398	1660	1823	2035	-

FIG. 1560YSO - GLOBE VALVES BELLOW SEAL - Y TYPE - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	-
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	-
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	-
H	322	388	382	435	472	518	570	653	678	781	879	1002	1107	1080	1210	--	--	--	--	-
H1	326	393	389	443	482	531	587	673	703	813	917	1046	1157	1143	1285	--	--	--	--	-

FIG. 1570YSO - GLOBE VALVES BELLOW SEAL - Y TYPE - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	-
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	-
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	-
H	325	391	385	441	480	547	651	718	782	849	920	1047	1167	1132	1272	--	--	--	--	-
H1	329	396	392	449	490	560	668	738	807	881	958	1091	1217	1195	1347	--	--	--	--	-

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
 CERTIFIED

A.N.C.C.
 I.S.P.E.S.L.
 NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

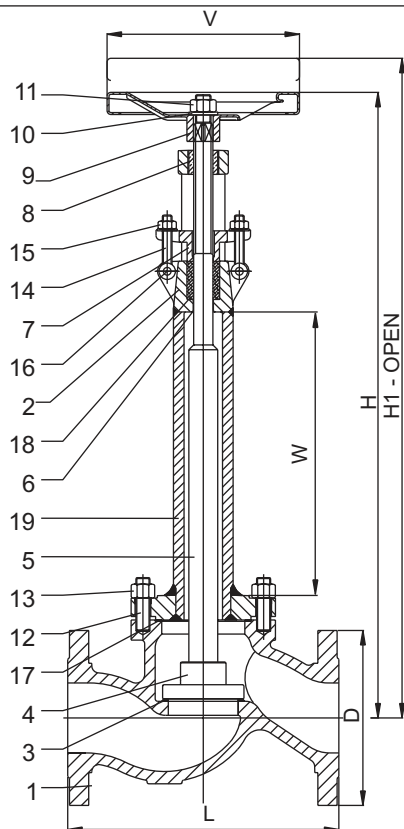

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δp bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

standard features


- **Description** BOLTED BONNET
EXTENDED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
LOOSING DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	FH1430EB - FH1560EB - FH1570EB
1 Body	1.4552
2 Bonnet	1.4552
3 Seat (integral)	1.4552 (1)
4 Disc	X5CrNiMo17-12-2 (1)
5 Stem	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	1.4552
7 Gland	X5CrNiMo17-12-2
8 Yoke sleeve	MS58 (3)
9 Handwheel	Steel
10 Plate	1.0460
11 Handwheel nut	X5CrNiMo17-12-2
12 Bolts	A2-70
13 Nuts	A2-70
14 Eye bolts	A2-70
15 Nuts	A2-70
16 Eye bolt pin	A2-70
17 Gasket	S. S. reinforced graphite (4)
18 Packing	Graphite rings & wiper rings (4)
19 Extension	X2CrNiMo17-12-2


- (1) On request: faced with Stellite® - Monei® - Hastelloy® - other materials
(2) On request: 17 Cr - Monei® - Hastelloy® - other materials

- (3) On request: GGG50
(4) On request: PTFE - other materials

options

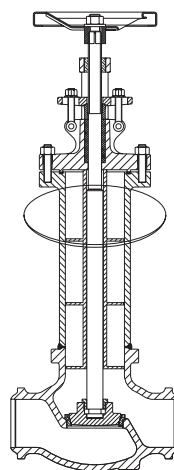

FULLY EXTRACTABLE

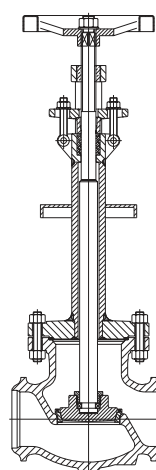

COLD BOX

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

GLOBE VALVES - CRYOGENIC **DIN PN 25 - 40 - 63 - 100**

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1430EB - CRYOGENIC GLOBE VALVES - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	150	200	200	225	225	300	300	400	500	500	600	600	700	700	800
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	300	300	300	300	300
H	565	570	595	605	630	665	685	825	880	920	1070	1160	1180	1360	1510	1650	1900	2010	2210	2750
H1	569	575	602	613	640	678	702	845	905	952	1108	1204	1230	1423	1585	1738	2000	2123	2335	--

FIG. 1560EB - CRYOGENIC GLOBE VALVES - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	800	800	1000	1200	--
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--
H	655	715	715	735	755	785	815	965	995	1055	1220	1310	1360	1410	1540	--	--	--	--	--
H1	659	720	722	743	765	798	832	985	1020	1087	1258	1354	1410	1473	1615	--	--	--	--	--

FIG. 1570EB - CRYOGENIC GLOBE VALVES - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	150	150	150	200	200	200	225	250	300	400	500	500	600	700	700	--	--	--	--	--
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	--	--	--	--	--
H	655	715	715	735	755	805	885	1015	1085	1105	1240	1330	1390	1440	1580	--	--	--	--	--
H1	659	720	722	743	765	818	902	1035	1110	1137	1278	1374	1440	1503	1655	--	--	--	--	--

features on request

- ☐ TOP FLANGE TO ISO 5210
- ☐ GEAR OPERATOR
- ☐ CHAIN WHEEL OPERATOR
- ☐ PNEUMATIC ACTUATOR
- ☐ HYDRAULIC ACTUATOR
- ☐ ELECTRIC ACTUATOR
- ☐ POSITION INDICATOR
- ☐ LIMIT SWITCHES
- ☐ LOCKING / INTERLOCK SYSTEM
- ☐ PTFE SOFT SEATS
- ☐ STEM PROTECTION / EXTENSION
- ☐ REGULATING DISC
- ☐ DOUBLE STAGE DISC
- ☐ STOP CHECK DISC
- ☐ LIVE LOADED PACKING
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
WELDED IN SEATS
LOOSED DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

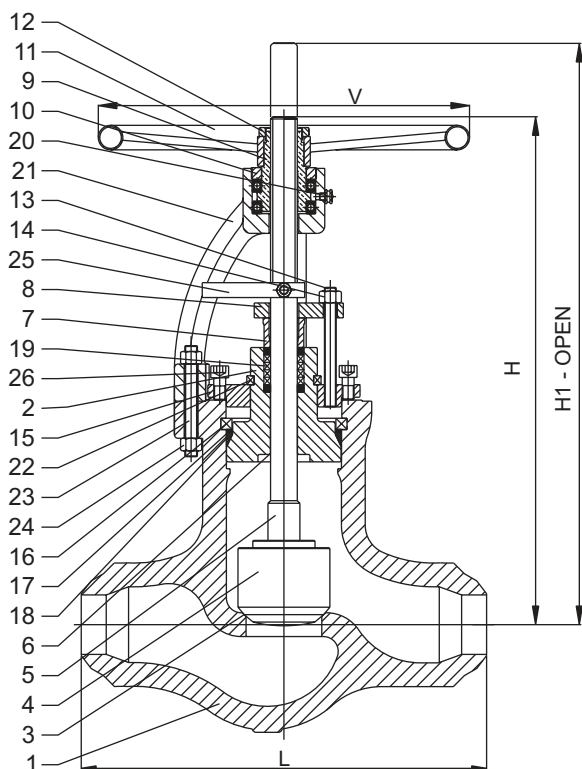

Maximum pressure under the disc

DN	80	100	125	150	200	250	300	350	400	450	500	600
Δp bar	85	60	35	21	14	9	6	5	4	3	2,8	2,2

If higher, valve to be mounted with gear operator or with pressure above the disc and fitted with external or internal bypass.

PART NAME	AP16x	MP16x	WCP16x
1 Body	1.0619	1.7357	1.7380
2 Bonnet	1.0619	1.7357	1.7380
3 Ring - seat surface	1.0460 - HF (1)	1.0460 + HF (1)	1.0460 + HF (1)
4 Disc - seat surface	1.0619 - HF (1)	1.7357 + HF (1)	1.7380 + HF (1)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)
6 Back seat (integral)	Overlay Stellite [®] (2)	Overlay Stellite [®] (2)	Overlay Stellite [®] (2)
7 Gland	X20Cr13	X20Cr13	X20Cr13
8 Gland flange	1.0460	X20Cr13	X20Cr13
9 Yoke sleeve	GGG50 (4)	GGG50 (4)	GGG50 (4)
10 Yoke nut	1.0460	1.0460	1.0460
11 Handwheel	Steel	Steel	Steel
12 Handwheel nut	1.0460	1.0460	1.0460
13 Bolts	CK35	21CrMoV57	21CrMoV57
14 Nuts	C35	24CrMo5	24CrMo5
15 Retainer flange	1.0460	1.0460	1.0460
16 Retainer ring	X20Cr13	X20Cr13	X20Cr13
17 Spacer ring	X20Cr13	X20Cr13	X20Cr13
18 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
19 Packing	Graphite rings and wiper rings	Graphite rings and wiper rings	Graphite rings and wiper rings
20 Grease nipple	Steel	Steel	Steel
21 Yoke	1.0619	1.7357	1.7380
22 Support ring	1.0460	X20Cr13	X20Cr13
23 Yoke / body bolt	CK35	21CrMoV57	21CrMoV57
24 Yoke / body nut	C35	24CrMo5	24CrMo5
25 No rotation device	C35	21CrMoV57	21CrMoV57
26 Bolt	CK35	21CrMoV57	21CrMoV57

(1) On request: faced with Stellite[®] - Monel[®] - Hastelloy[®] - other materials

(2) On request: faced with Monel[®] - Hastelloy[®] - other materials

(3) On request: 17 Cr - Monel[®] - Hastelloy[®] - other materials

(4) On request: Nodular Iron - Nitronic 60

(5) On request: Metal

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PRESSURE SEAL GLOBE VALVES DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P162 - PRESSURE SEAL GLOBE VALVES DIN PN 100 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P163 - PRESSURE SEAL GLOBE VALVES DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	250	300	300	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P164 - PRESSURE SEAL GLOBE VALVES DIN PN 250 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P165 - PRESSURE SEAL GLOBE VALVES DIN PN 320 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P166 - PRESSURE SEAL GLOBE VALVES DIN PN 420 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

features on request

- | | |
|---|--|
| ☐ TOP FLANGE TO ISO 5210 | ☐ PTFE SOFT SEATS |
| ☐ GEAR OPERATOR | ☐ STEM PROTECTION / EXTENSION |
| ☐ CHAIN WHEEL OPERATOR | ☐ REGULATING DISC |
| ☐ PNEUMATIC ACTUATOR | ☐ DOUBLE STAGE DISC |
| ☐ HYDRAULIC ACTUATOR | ☐ STOP CHECK DISC |
| ☐ ELECTRIC ACTUATOR | ☐ LIVE LOADED PACKING |
| ☐ POSITION INDICATOR | ☐ DRAIN PLUG |
| ☐ LIMIT SWITCHES | ☐ FLANGED ENDS |
| ☐ LOCKING / INTERLOCK SYSTEM | ☐ ANSI CONNECTIONS |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

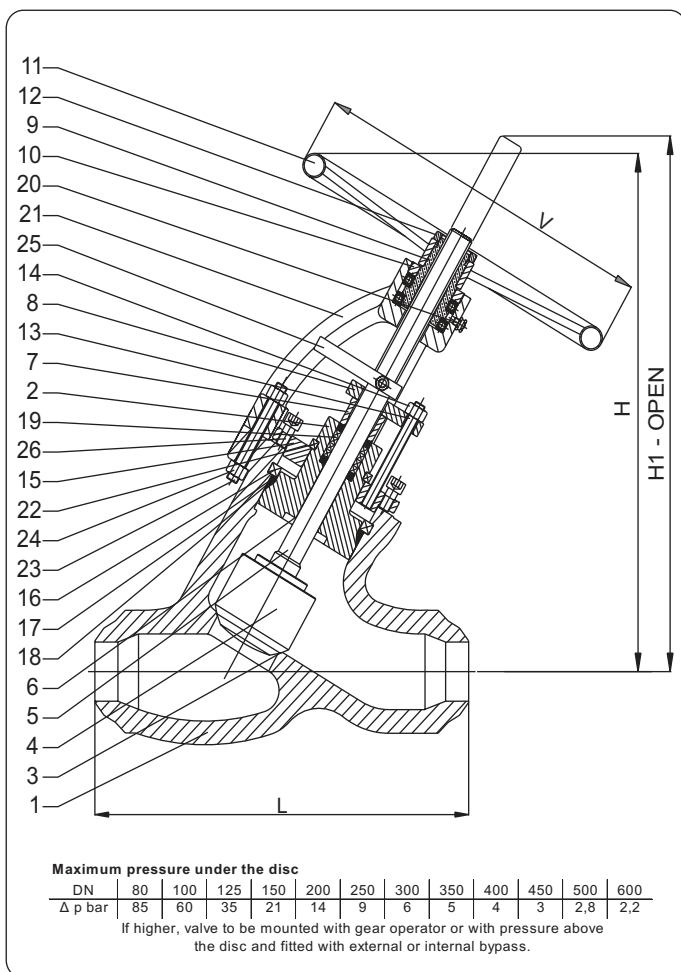

standard features

- **Description** PRESSURE SEAL BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
NON RISING HANDWHEEL
INTEGRAL BACKSEAT
WELDED IN SEATS
LOOSED DISC
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	AP18x	WP18x	WCP18x
1 Body	1.0619	1.7357	1.7380
2 Bonnet	1.0619	1.7357	1.7380
3 Ring - seat surface	1.0460 - HF (1)	1.0460 + HF (1)	1.0460 + HF (1)
4 Disc - seat surface	1.0619 - HF (1)	1.7357 + HF (1)	1.7380 + HF (1)
5 Stem	X20Cr13 (3)	X20Cr13 (3)	X20Cr13 (3)
6 Back seat (integral)	Overlay Stellite [®] (2)	Overlay Stellite [®] (2)	Overlay Stellite [®] (2)
7 Gland	X20Cr13	X20Cr13	X20Cr13
8 Gland flange	1.0460	X20Cr13	X20Cr13
9 Yoke sleeve	GGG50 (4)	GGG50 (4)	GGG50 (4)
10 Yoke nut	1.0460	1.0460	1.0460
11 Handwheel	Steel	Steel	Steel
12 Handwheel nut	1.0460	1.0460	1.0460
13 Bolts	CK35	21CrMoV57	21CrMoV57
14 Nuts	C35	24CrMo5	24CrMo5
15 Retainer flange	1.0460	1.0460	1.0460
16 Retainer ring	X20Cr13	X20Cr13	X20Cr13
17 Spacer ring	X20Cr13	X20Cr13	X20Cr13
18 Gasket	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)	S. S. reinforced graphite (4)
19 Packing	Graphite rings and wiper rings	Graphite rings and wiper rings	Graphite rings and wiper rings
20 Grease nipple	Steel	Steel	Steel
21 Yoke	1.0619	1.7357	1.7380
22 Support ring	1.0460	1.0460	1.0460
23 Yoke / body bolt	CK35	21CrMoV57	21CrMoV57
24 Yoke / body nut	C35	24CrMo5	24CrMo5
25 No rotation device	C35	21CrMoV57	21CrMoV57
26 Bolt	CK35	21CrMoV57	21CrMoV57

(1) On request: faced with Stellite[®] - Monel[®] - Hastelloy[®] - other materials
 (2) On request: faced with Monel[®] - Hastelloy[®] - other materials
 (3) On request: 17 Cr - Monel[®] - Hastelloy[®] - other materials

(4) On request: Nodular Iron - Nitronic 60
 (5) On request: Metal

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PRESSURE SEAL GLOBE VALVES - 'Y' TYPE

DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P182 - PRESSURE SEAL GLOBE VALVES - Y TYPE - DIN PN 100 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	200	200	250	300	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P183 - PRESSURE SEAL GLOBE VALVES - Y TYPE - DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	250	300	300	400	500	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P184 - PRESSURE SEAL GLOBE VALVES - Y TYPE - DIN PN 250 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P185 - PRESSURE SEAL GLOBE VALVES - Y TYPE - DIN PN 320 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

FIG. P186 - PRESSURE SEAL GLOBE VALVES - Y TYPE - DIN PN 420 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
V	300	400	400	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	G.O.	--
H	500	590	590	600	860	860	1000	1330	1480	--	--	--	--
H1	513	607	610	625	892	898	1050	1393	1555	--	--	--	--

features on request

- | | |
|---|---|
| <ul style="list-style-type: none"> ☐ TOP FLANGE TO ISO 5210 ☐ GEAR OPERATOR ☐ CHAIN WHEEL OPERATOR ☐ PNEUMATIC ACTUATOR ☐ HYDRAULIC ACTUATOR ☐ ELECTRIC ACTUATOR ☐ POSITION INDICATOR ☐ LIMIT SWITCHES ☐ LOCKING / INTERLOCK SYSTEM | <ul style="list-style-type: none"> ☐ PTFE SOFT SEATS ☐ STEM PROTECTION / EXTENSION ☐ REGULATING DISC ☐ DOUBLE STAGE DISC ☐ STOP CHECK DISC ☐ LIVE LOADED PACKING ☐ DRAIN PLUG ☐ FLANGED ENDS ☐ ANSI CONNECTIONS |
|---|---|

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED










A.N.C.C.
I.S.P.E.S.L.
NOTIFIED




VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESCRIPTION OF A TYPICAL SWING CHECK VALVE - PRESSURE SEAL

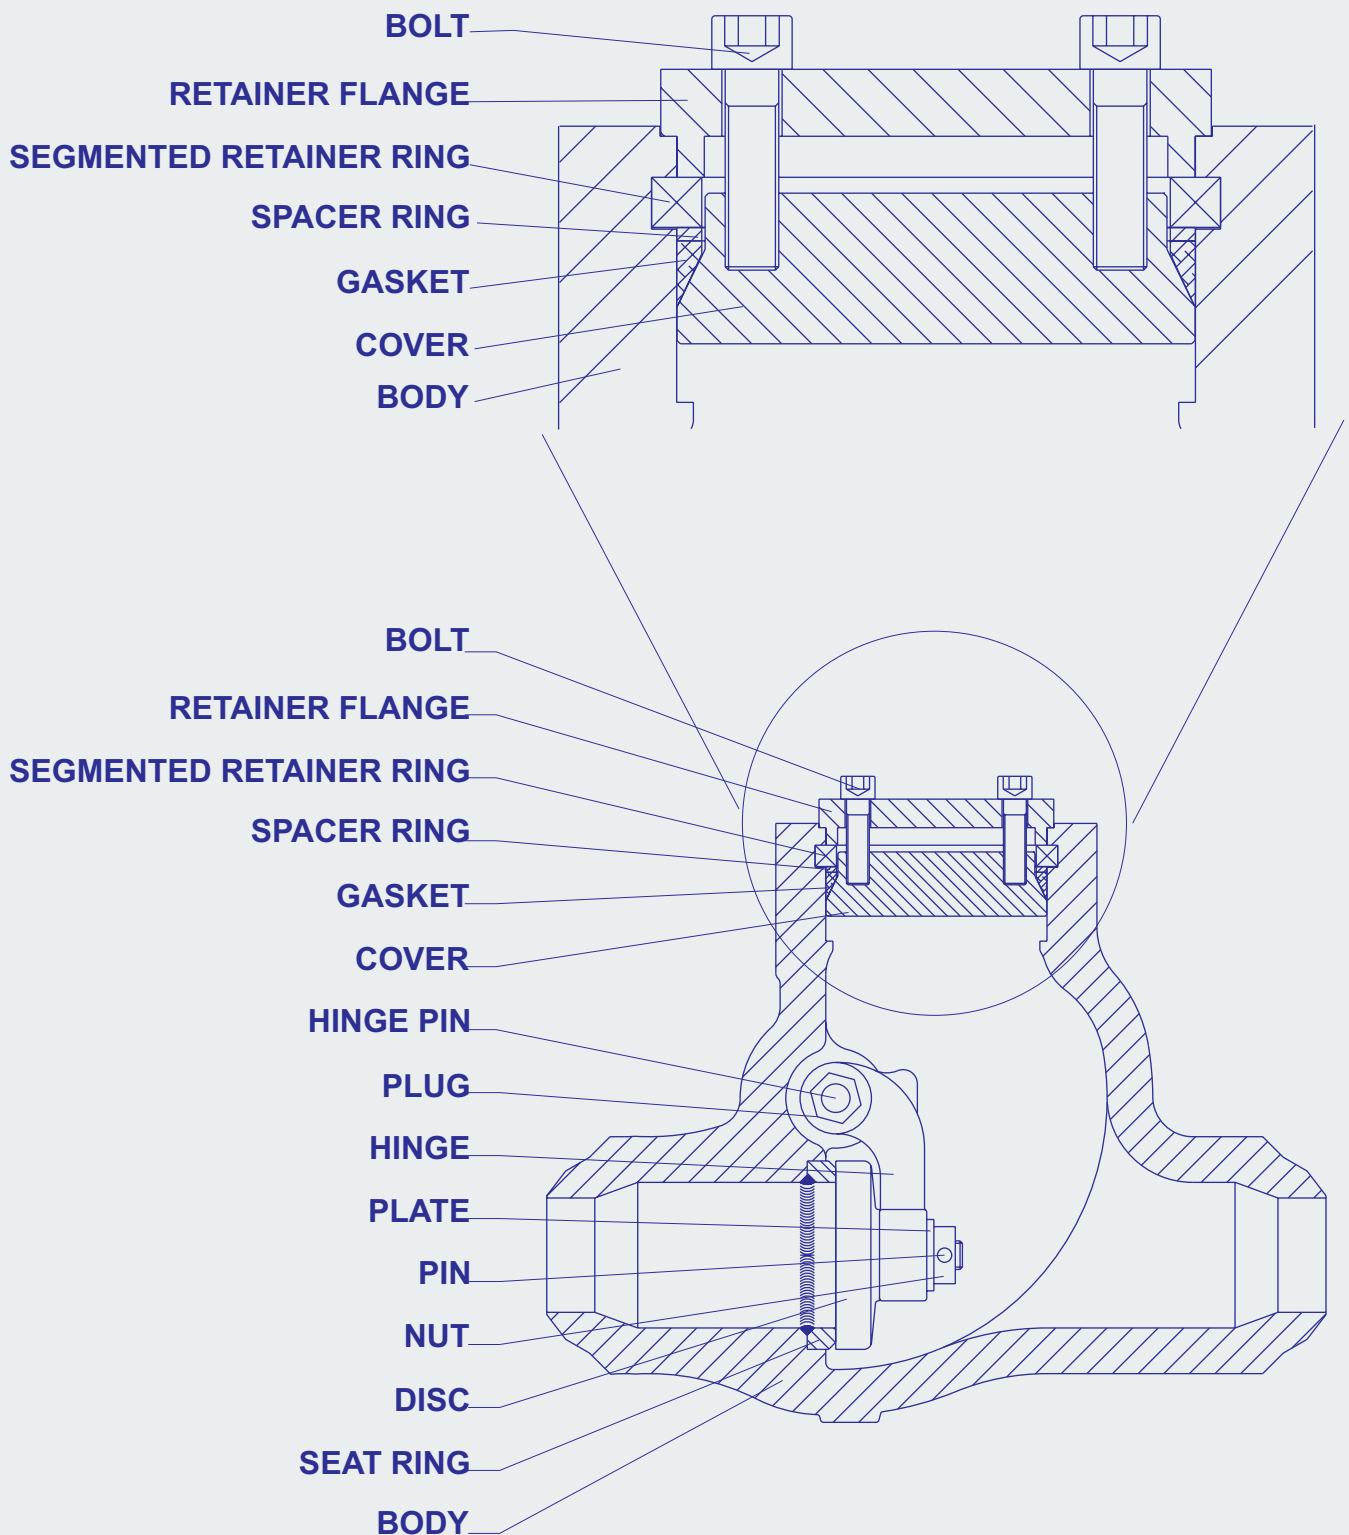

TYPE	CLASS	SIZE	FIG. N.	TYPE	CLASS	SIZE	FIG. N.
PISTON CHECK VALVES Y TYPE  page 96	PN16	15 - 600	1405	SWING CHECK VALVES  page 92	PN16 - F6	50 - 1000	1311
	PN 25/40	15 - 600	1434		PN16 - F1	50 - 1000	1312
	PN 63	15 - 600	1560YR		PN 25	50 - 1000	1313
	PN 100	15 - 300	1570YR		PN 40	50 - 1000	1314
PISTON CHECK VALVES 90° ANGLE  page 98	PN16	15 - 600	1411		PN 63	50 - 600	1315
	PN 25/40	15 - 600	1441		PN 100	50 - 600	1316
	PN 63	15 - 600	1560AR		PN 160	50 - 600	1317
	PN 100	15 - 300	1570AR	PISTON CHECK VALVES  page 94	PN16	15 - 600	1402
TILTING DISC CHECK VALVES PRESSURE SEAL  page 102	PN 25/40	15 - 600	1441		PN 25/40	15 - 600	1431
	PN 63	15 - 600	1560AR		PN 63	15 - 600	1560R
	PN 100	15 - 300	1570AR		PN 100	15 - 300	1570R
	PN 160	15 - 300	1580R		PN 160	15 - 300	1580R
	PN 100	50 - 600	P172T	SWING CHECK VALVES PRESSURE SEAL  page 100	PN 100	50 - 600	P172
LIFT CHECK VALVES PRESSURE SEAL Y TYPE  page 106	PN 160	50 - 600	P173T		PN 160	50 - 600	P173
	PN 250	50 - 400	P174T		PN 250	50 - 400	P174
	PN 320	50 - 400	P175T		PN 320	50 - 400	P175
	PN 420	50 - 400	P176T		PN 420	50 - 400	P176
	PN 100	50 - 600	P182PC	LIFT CHECK VALVES PRESSURE SEAL STRAIGHT  page 104	PN 100	50 - 600	P162PC
LIFT CHECK VALVES PRESSURE SEAL Y TYPE  page 106	PN 160	50 - 600	P183PC		PN 160	50 - 600	P163PC
	PN 250	50 - 400	P184PC		PN 250	50 - 400	P164PC
	PN 320	50 - 400	P185PC		PN 320	50 - 400	P165PC
	PN 420	50 - 400	P186PC		PN 420	50 - 400	P166PC

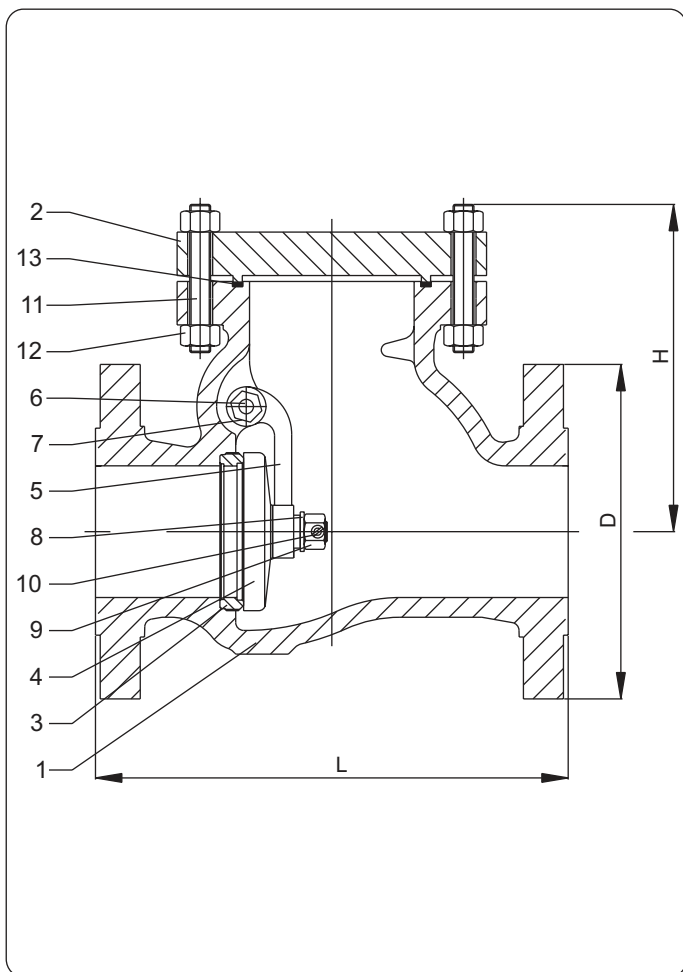

standard features

- **Description** FULL OPENING
BOLTED COVER
LAPPED DISC AND SEAT
RENEWABLE SEAT
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED

PART NAME	A13xx	C13xx	FH13xx	FK13xx
1 Body	1.0619	1.7363	1.4552	1.4581
2 Cover	1.0619	1.7363	1.4552	1.4581
3 Seat ring surface	X20Cr13 (1)	X20Cr13 (1)	X6CrNiTi18-10 (1)	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (2)	X20Cr13 (2)	X6CrNiTi18-10 (2)	X5CrNiMo17-12-2 (2)
5 Hinge	1.0619 (3)	X5CrNiMo17-12-2 (3)	X6CrNiTi18-10 (3)	GX5CrNiMoNb19-11-2 (3)
6 Inge pin	X20Cr13	X20Cr13	X6CrNiTi18-10	X5CrNiMo17-12-2
7 Plug	1.0460	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
8 Plate	1.0460	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
9 Nut	C35	24CrMo5	A2-70	A2-70
10 Pin	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
11 Bolts	CK35	21CrMoV57	A2-70	A2-70
12 Nut	C35	24CrMo5	A2-70	A2-70
13 Gasket	← <i>S.S. spiral wound reinforced graphite (4)</i> →			

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: 17 Cr - Monel® - Hastelloy® - other materials

(4) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

SWING CHECK VALVES

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1311 - SWING CHECK VALVES DIN PN 16 - F6

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	200	240	260	300	350	400	500	600	700	800	900	1100	1300	1500	1700	1900	2100
D	165	185	200	220	250	285	340	405	460	520	580	715	840	910	1025	1125	1255
H	150	180	200	225	270	300	355	390	445	495	530	620	730	--	--	--	--

FIG. 1312 - SWING CHECK VALVES DIN PN 16 - F1

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	230	290	310	350	400	480	600	730	850	980	1100	1250	1450	1650	1850	2050	2250
D	165	185	200	220	250	285	340	405	460	520	580	715	840	910	1025	1125	1255
H	150	180	200	225	270	300	355	390	445	495	530	620	730	--	--	--	--

FIG. 1313 - SWING CHECK VALVES DIN PN 25 - F1

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	230	290	310	350	400	480	600	730	850	980	1100	1250	1450	1650	1850	2050	2250
D	165	185	200	235	270	300	360	425	485	555	620	730	845	960	1085	1185	1320
H	165	180	200	235	270	300	360	425	485	495	530	740	--	--	--	--	--

FIG. 1314 - SWING CHECK VALVES DIN PN 40 - F1

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	230	290	310	350	400	480	600	730	850	980	1100	1250	1450	1650	1850	2050	2250
D	165	185	200	235	270	300	375	450	515	580	660	775	890	995	1140	1250	1360
H	150	180	200	225	270	300	355	390	445	495	530	740	--	--	--	--	--

FIG. 1315 - SWING CHECK VALVES DIN PN 63 - F2

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	300	340	380	430	500	550	650	775	900	1025	1150	1400	1600	--	--	--	--
D	180	205	215	250	295	345	415	470	530	600	670	800	930	--	--	--	--
H	195	210	230	290	305	370	410	470	520	--	--	--	--	--	--	--	--

FIG. 1316 - SWING CHECK VALVES DIN PN 100 - F2

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	300	340	380	430	500	550	650	775	900	1025	1150	1400	1600	--	--	--	--
D	195	220	230	265	315	355	430	505	585	655	715	870	990	--	--	--	--
H	195	210	230	290	305	370	410	470	520	--	--	--	--	--	--	--	--

FIG. 1317 - SWING CHECK VALVES DIN PN 160 - F8

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--	--	--	--	--
D	195	220	230	265	315	355	430	515	585	--	--	--	--	--	--	--	--
H	195	210	230	290	305	370	410	--	--	--	--	--	--	--	--	--	--

features on request

- ☐ DISK WITH PTFE OR RUBBER
- ☐ LEVER AND WEIGHT
- ☐ SHOCK ABSORBER
- ☐ LOCKING DEVICE
- ☐ INTEGRAL SEAT
- ☐ BY-PASS
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ RTJ FLANGES
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED COVER
RETURN SPRING
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

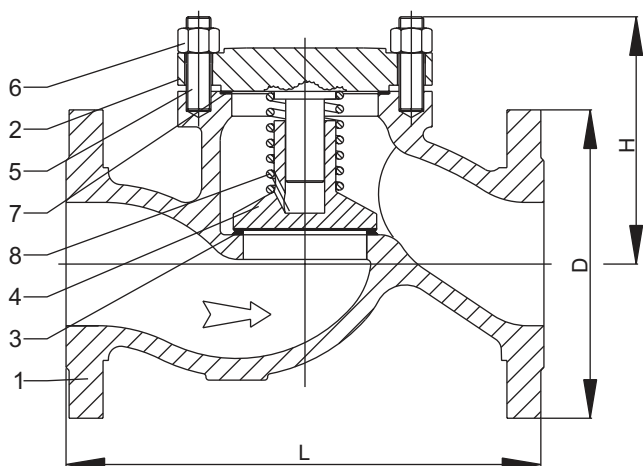

PART NAME	G1402 - (CAST IRON)	A1431 A1560R A1570R A1580R	FK1431 FK1560R FK1570R FK1580R
1 Body	EN-GJL-250	1.0619 (A)	1.4581
2 Cover	EN-GJL-250	1.0619 (B)	1.4581
3 Seat ring surface	N/A	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
5 Spring	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
6 Bolts	CK35	CK35	A2-70
7 Nuts	C35	C35	A2-70
8 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: PTFE - other materials

- (A) For PN ≤ 40 and DN ≤ 50 = 1.0460
 For PN ≥ 63 and DN ≤ 25 = 1.0460
 (B) For PN ≤ 40 and DN ≤ 80 = 1.0460
 For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



TUV
AD-Merkblatt HP 0
TRB 801 No. 45
APPROVED

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PISTON CHECK VALVES

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1402 - PISTON CHECK VALVES DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
H	70	80	85	100	110	115	130	145	165	185	205	235	250	300	360	410	460	520	570	--

FIG.1431 - PISTON CHECK VALVES DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
H	65	75	85	100	110	125	145	160	190	220	250	295	320	385	450	510	585	610	670	--

FIG. 1560R - PISTON CHECK VALVES DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
H	105	120	120	135	150	160	180	200	230	280	310	340	390	430	500	--	--	--	--	--

FIG. 1570R - PISTON CHECK VALVES DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
H	105	120	120	135	150	170	200	220	250	300	350	380	410	480	570	--	--	--	--	--

FIG. 1580R - PISTON CHECK VALVES DIN PN 160 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	390	430	515	585	--	--	--	--	--
H	110	125	125	140	155	180	220	240	270	320	370	400	430	500	600	--	--	--	--	--

features on request

- | | |
|--|--|
| ☐ DISC WITH PTFE OR RUBBER | ☐ BW ENDS |
| ☐ INTEGRAL SEAT | ☐ RTJ FLANGES |
| ☐ BY-PASS | ☐ ANSI CONNECTIONS |
| ☐ DRAIN PLUG | |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED COVER
RETURN SPRING
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

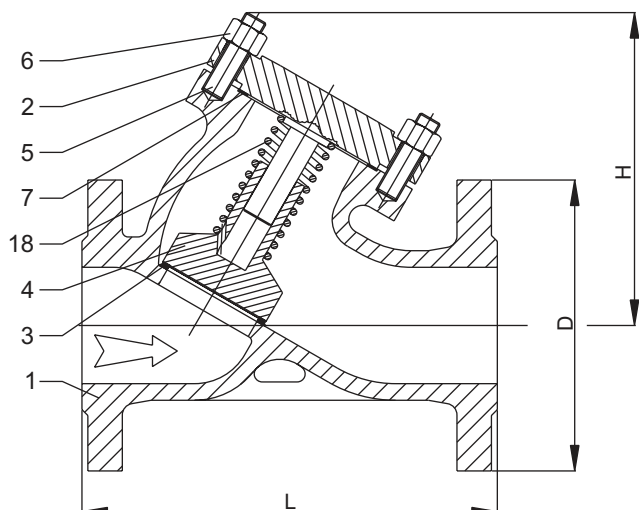

PART NAME	G1405 - (CAST IRON)	A1434 A1560YR A1570YR	FK1434 FK1560YR FK1570YR
1 Body	EN-GJL-250	1.0619 (A)	1.4581
2 Cover	EN-GJL-250	1.0619 (B)	1.4581
3 Seat ring surface	N/A	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
5 Spring	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
6 Bolts	CK35	CK35	A2-70
7 Nuts	C35	C35	A2-70
8 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: PTFE - other materials

- (A) For PN ≤ 40 and DN ≤ 50 = 1.0460
 For PN ≥ 63 and DN ≤ 25 = 1.0460
 (B) For PN ≤ 40 and DN ≤ 80 = 1.0460
 For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
 CERTIFIED

A.N.C.C.
 I.S.P.E.S.L.
 NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PISTON CHECK VALVES - 'Y' TYPE DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1405 - PISTON CHECK VALVES - 'Y' TYPE - DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
H	70	80	85	100	110	115	130	145	165	185	205	235	250	300	360	410	460	520	570	--

FIG.1434 - PISTON CHECK VALVES - 'Y' TYPE - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
H	65	75	85	100	110	125	145	160	190	220	250	295	320	385	450	510	585	610	670	--

FIG. 1560YR - PISTON CHECK VALVES - 'Y' TYPE - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
H	105	120	120	135	150	160	180	200	230	280	310	340	390	430	500	--	--	--	--	--

FIG. 1570YR - PISTON CHECK VALVES - 'Y' TYPE - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
H	105	120	120	135	150	170	200	220	250	300	350	380	410	480	570	--	--	--	--	--

features on request

- | | |
|--|--|
| ☐ DISC WITH PTFE OR RUBBER | ☐ BW ENDS |
| ☐ INTEGRAL SEAT | ☐ RTJ FLANGES |
| ☐ BY-PASS | ☐ ANSI CONNECTIONS |
| ☐ DRAIN PLUG | |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

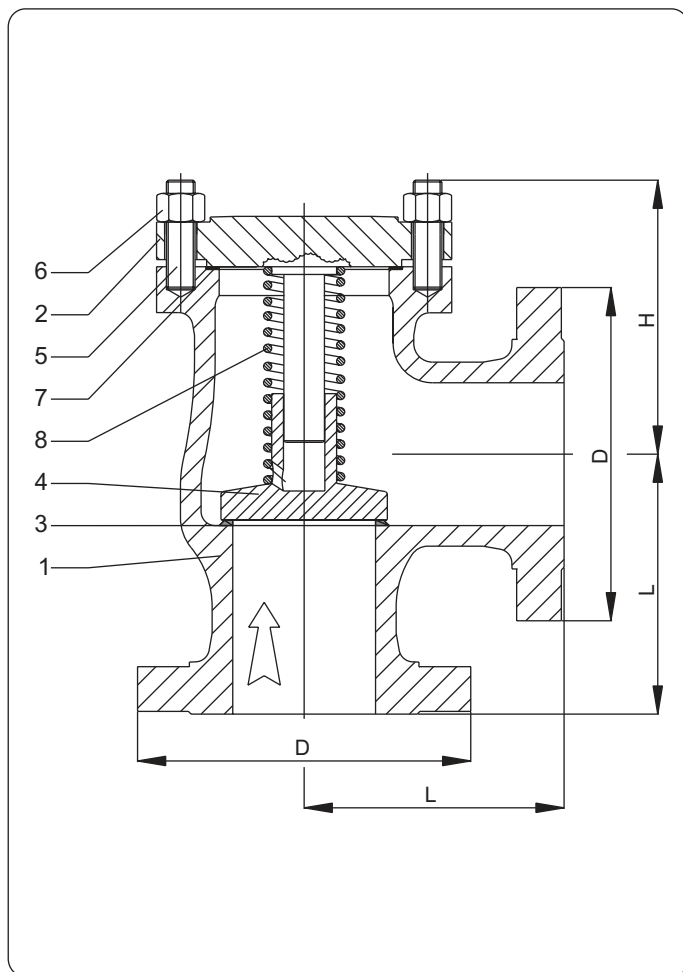
standard features

- **Description** BOLTED COVER
RETURN SPRING
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	G1411 - (CAST IRON)	A1441 A1560AR A1570AR	FK1441 FK1560AR FK1570AR
1 Body	EN-GJL-250	1.0619 (A)	1.4581
2 Cover	EN-GJL-250	1.0619 (B)	1.4581
3 Seat ring surface	N/A	X20Cr13 (1)	X5CrNiMo17-12-2 (1)
4 Disc seat surface	X20Cr13 (2)	X20Cr13 (2)	X5CrNiMo17-12-2 (2)
5 Spring	X5CrNiMo17-12-2	X5CrNiMo17-12-2	X5CrNiMo17-12-2
6 Bolts	CK35	CK35	A2-70
7 Nuts	C35	C35	A2-70
8 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: PTFE - other materials

- (A) For PN ≤ 40 and DN ≤ 50 = 1.0460
 For PN ≥ 63 and DN ≤ 25 = 1.0460
 (B) For PN ≤ 40 and DN ≤ 80 = 1.0460
 For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
 CERTIFIED

A.N.C.C.
 I.S.P.E.S.L.
 NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

PISTON CHECK VALVES - 90° ANGLE DIN PN 16 - 25 - 40 - 63 - 100

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1411 - PISTON CHECK VALVES - 90° ANGLE - DIN PN 16 - CAST IRON - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
H	70	80	85	100	110	115	130	145	165	185	205	235	250	300	360	410	460	520	570	--

FIG.1441 - PISTON CHECK VALVES - 90° ANGLE - DIN PN 25 / 40 - F32

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	90	95	100	105	115	125	145	155	175	200	225	250	275	325	375	425	475	500	575	675
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
H	70	80	85	100	110	125	145	160	190	220	250	295	320	385	450	510	585	610	670	--

FIG. 1560AR - PISTON CHECK VALVES - 90° ANGLE - DIN PN 63 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	515	575	700	--	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	--	--
H	105	120	120	135	150	160	180	200	230	280	310	340	390	430	500	--	--	--	--	--

FIG. 1570AR - PISTON CHECK VALVES - 90° ANGLE - DIN PN 100 - F33

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	105	105	115	130	130	150	170	190	215	250	275	300	325	390	450	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
H	105	120	120	135	150	170	200	220	250	300	350	380	410	480	570	--	--	--	--	--

features on request

- | | |
|--|--|
| ☐ DISC WITH PTFE OR RUBBER | ☐ BW ENDS |
| ☐ INTEGRAL SEAT | ☐ RTJ FLANGES |
| ☐ BY-PASS | ☐ ANSI CONNECTIONS |
| ☐ DRAIN PLUG | |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL COVER
FULL OPENING
LAPPED DISC AND SEAT
WELDED IN SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

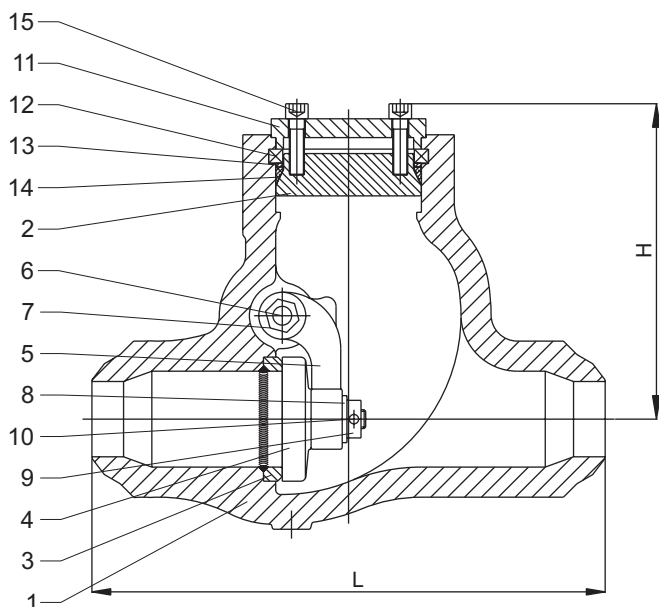

PART NAME	AP17x	FKP17x
1 Body	1.0619	1.4581
2 Cover	1.0619	1.4581
3 Ring - seat surface	1.0460 + HF (1)	X2CrNiMo17-12-2 + HF (1)
4 Disc - seat surfaces	1.0619 + HF (2)	1.4581 + HF (2)
5 Hinge	1.0619	1.4581
6 Hinge pin	X20Cr13	X5CrNiMo17-12-2
7 Plug (externally)	1.0460	X5CrNiMo17-12-2
8 Plate	1.0460	X5CrNiMo17-12-2
9 Nut	C35	A2-70
10 Pin	X5CrNiMo17-12-2	X5CrNiMo17-12-2
11 Retainer flange	1.0460	1.4401
12 Segmented retainer ring	X20Cr13	1.4401
13 Spacer ring	X20Cr13	1.4401
14 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)
15 Bolt	CK35	A2-70

- (1) On request: faced with Stellite® - Mone® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Mone® - Hastelloy® - other materials
 (3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

SWING CHECK VALVES - PRESSURE SEAL

DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P172 - PRESSURE SEAL SWING CHECK VALVES DIN PN 100 - F2

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
L RF	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
H	180	205	215	275	300	350	390	450	500	555	630	800	1000

FIG. P173 - PRESSURE SEAL SWING CHECK VALVES DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
L RF	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
H	245	260	250	310	340	390	510	580	620	680	740	850	--

FIG. P174 - PRESSURE SEAL SWING CHECK VALVES DIN PN 250 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	270	290	350	380	420	630	690	750	800	980	--	--

FIG. P175 - PRESSURE SEAL SWING CHECK VALVES DIN PN 320 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	280	300	380	405	430	650	720	780	--	--	--	--

FIG. P176 - PRESSURE SEAL SWING CHECK VALVES DIN PN 420 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	280	300	380	405	430	650	720	780	--	--	--	--

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ BY-PASS
- ☐ DRAIN PLUG
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

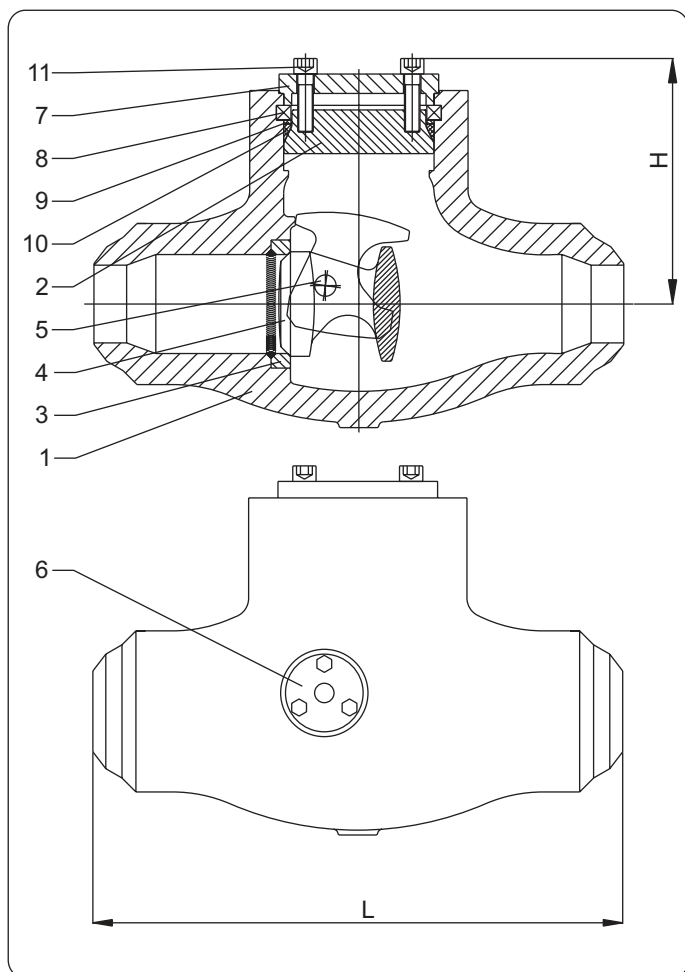

standard features

- **Description** PRESSURE SEAL COVER
LAPPED DISC AND SEAT
WELDED IN SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	AP17xT	FKP 17xT
1 Body	1.0619	1.4581
2 Cover	1.0619	1.4581
3 Ring - seat surface	1.0460 + HF (1)	X2CrNiMo17-12-2 + HF (1)
4 Disc - seat surfaces	1.0619 + HF (2)	1.4581 + HF (2)
5 Pin	X5CrNiMo17-12-2	X5CrNiMo17-12-2
6 Plug (externally)	1.0460	X5CrNiMo17-12-2
7 Retainer flange	1.0460	1.4401
8 Segmented retainer ring	X20Cr13	1.4401
9 Spacer ring	X20Cr13	1.4401
10 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)
11 Bolt	CK35	A2-70

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

TILTING DISC CHECK VALVES

PRESSURE SEAL DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P172T - PRESSURE SEAL TILTING DISC CHECK VALVES DIN PN 100 - F2

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
L RF	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
H	180	205	215	275	300	350	390	450	500	555	630	800	1000

FIG. P173T - PRESSURE SEAL TILTING DISC CHECK VALVES DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
L RF	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
H	245	260	250	310	340	390	510	580	620	680	740	850	--

FIG. P174T - PRESSURE SEAL TILTING DISC CHECK VALVES DIN PN 250 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	270	290	350	380	420	630	690	750	800	980	--	--

FIG. P175T - PRESSURE SEAL TILTING DISC CHECK VALVES DIN PN 320 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	280	300	380	405	430	650	720	780	840	1010	--	--

FIG. P176T - PRESSURE SEAL TILTING DISC CHECK VALVES DIN PN 420 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	245	280	300	380	405	430	650	720	780	840	1010	--	--

features on request

- | | |
|--|--|
| ☐ DISC WITH PTFE OR RUBBER | ☐ FLANGED ENDS |
| ☐ INTEGRAL SEAT | ☐ RTJ FLANGES |
| ☐ BY-PASS | ☐ ANSI CONNECTIONS |
| ☐ DRAIN PLUG | |

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

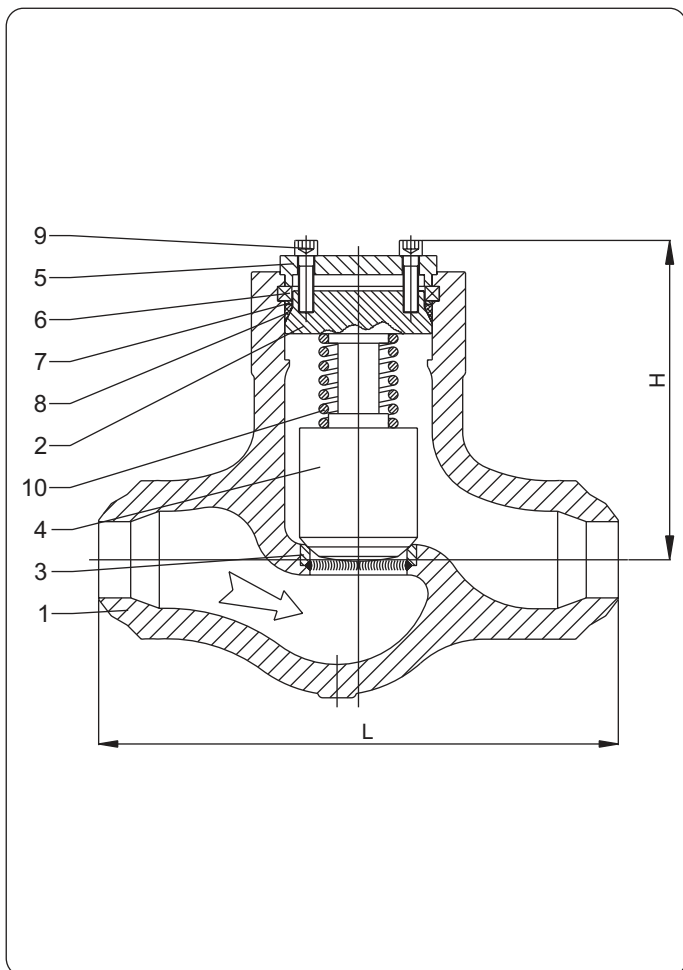

standard features

- **Description** PRESSURE SEAL COVER
LAPPED DISC AND SEAT
WELDED IN SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	AP16xPC	FKP16xPC
1 Body	1.0619	1.4581
2 Cover	1.0619	1.4581
3 Ring - seat surface	1.0460 + HF (1)	X2CrNiMo17-12-2 + HF (1)
4 Disc - seat surfaces	1.0619 + HF (2)	1.4581 + HF (2)
5 Retainer flange	1.0460	1.4401
6 Segmented retainer ring	X20Cr13	1.4401
7 Spacer ring	X20Cr13	1.4401
8 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)
9 Bolt	CK35	A2-70
10 Spring	X5CrNiMo17-12-2	X5CrNiMo17-12-2

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

LIFT CHECK VALVES - PRESSURE SEAL STRAIGHT TYPE - DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P162PC - PRESSURE SEAL LIFT CHECK VALVES DIN PN 100 - F2

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
L RF	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
H	230	260	280	330	360	450	520	600	700	--	--	--	--

FIG. P163PC - PRESSURE SEAL LIFT CHECK VALVES DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
L RF	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
H	270	285	300	390	410	430	520	60	700	--	--	--	--

FIG. P164PC - PRESSURE SEAL LIFT CHECK VALVES DIN PN 250 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

FIG. P165PC - PRESSURE SEAL LIFT CHECK VALVES DIN PN 320 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

FIG. P166PC - PRESSURE SEAL LIFT CHECK VALVES DIN PN 420 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ BY-PASS
- ☐ DRAIN PLUG
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** PRESSURE SEAL COVER
LAPPED DISC AND SEAT
WELDED IN SEATS
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

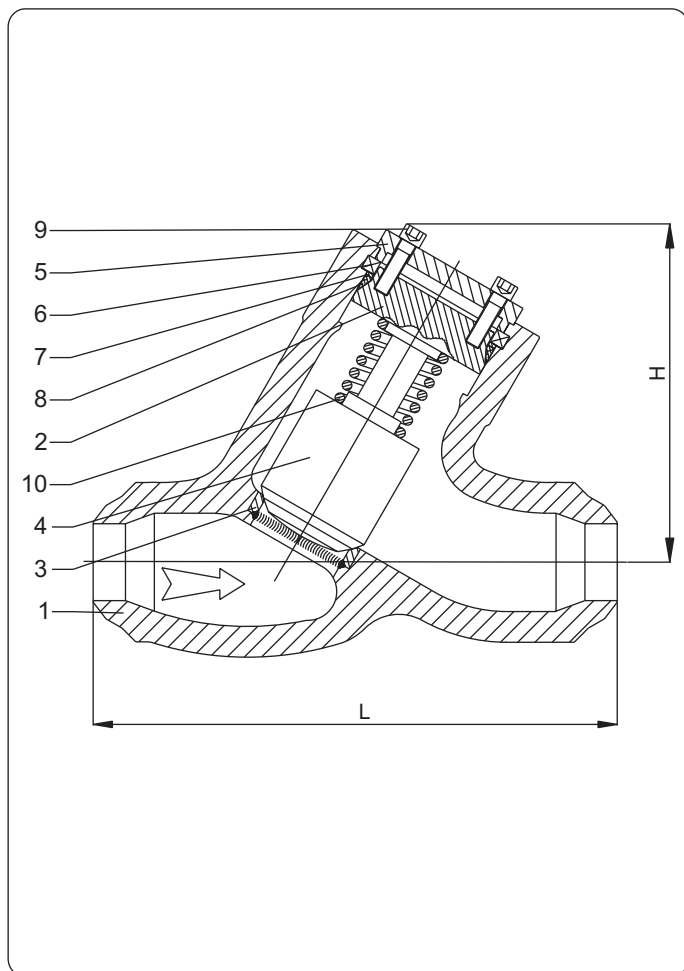

PART NAME	AP18xPC	FKP18xPC
1 Body	1.0619	1.4581
2 Cover	1.0619	1.4581
3 Ring - seat surface	1.0460 + HF (1)	X2CrNiMo17-12-2 + HF (1)
4 Disc - seat surfaces	1.0619 + HF (2)	1.4581 + HF (2)
5 Retainer flange	1.0460	1.4401
6 Segmented retainer ring	X20Cr13	1.4401
7 Spacer ring	X20Cr13	1.4401
8 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)
9 Bolt	CK35	A2-70
10 Spring	X5CrNiMo17-12-2	X5CrNiMo17-12-2

- (1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (2) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
 (3) On request: Soft iron - Stainless steel

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.I.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

LIFT CHECK VALVES - PRESSURE SEAL

'Y' TYPE - DIN PN 100 - 160 - 250 - 320 - 420

VALVOSIDER
MANUFACTURER OF VALVES

FIG. P182PC - PRESSURE SEAL LIFT CHECK VALVES - 'Y' TYPE - DIN PN 100 - F2

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
L RF	300	340	380	430	500	550	650	775	900	1025	1150	1275	1600
H	230	260	280	330	360	450	520	600	700	--	--	--	--

FIG. P183PC - PRESSURE SEAL LIFT CHECK VALVES - 'Y' TYPE - DIN PN 160 - F8

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
L RF	300	360	390	450	525	600	750	900	1050	1200	1350	1650	--
H	270	285	300	390	410	430	520	60	700	--	--	--	--

FIG. P184PC - PRESSURE SEAL LIFT CHECK VALVES - 'Y' TYPE - DIN PN 250 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

FIG. P185PC - PRESSURE SEAL LIFT CHECK VALVES - 'Y' TYPE - DIN PN 320 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

FIG. P186PC - PRESSURE SEAL LIFT CHECK VALVES - 'Y' TYPE - DIN PN 420 - F9

SIZE	50	65	80	100	125	150	200	250	300	350	400	500	600
L BW	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
L RF	350	425	470	550	650	750	950	1150	1350	1550	1750	--	--
H	270	290	310	400	420	440	530	620	720	--	--	--	--

features on request

- ☐ DISC WITH PTFE OR RUBBER
- ☐ INTEGRAL SEAT
- ☐ BY-PASS
- ☐ DRAIN PLUG
- ☐ FLANGED ENDS
- ☐ RTJ FLANGES
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.




ISO 9001-2000
CERTIFIED



A.N.C.C.
I.S.P.E.S.L.
NOTIFIED




VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESCRIPTION OF A TYPICAL STRAINER BASKET TYPE

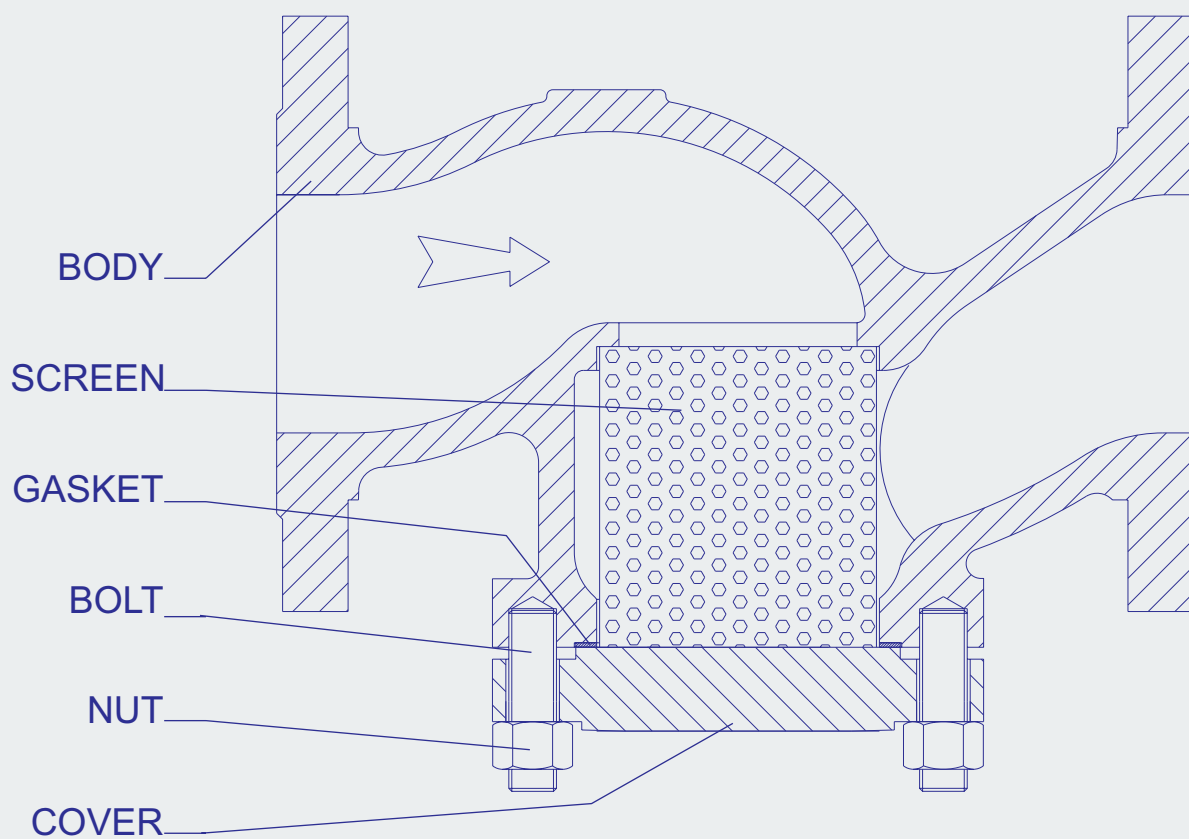

TYPE		CLASS	SIZES	FIG. N.
 STRAINERS 'Y' TYPE page 110		PN16	15 - 600	1404
		PN 25/40	15 - 600	1433
		PN 63	15 - 600	1560YS
		PN 100	15 - 300	1570YS
		PN 160	15 - 300	1580YS
 STRAINERS BASKET TYPE page 112		PN16	15 - 600	1401BS
		PN 25/40	15 - 600	1430BS
		PN 63	15 - 600	1560BS
		PN 100	15 - 300	1570BS
		PN 160	15 - 300	1580BS

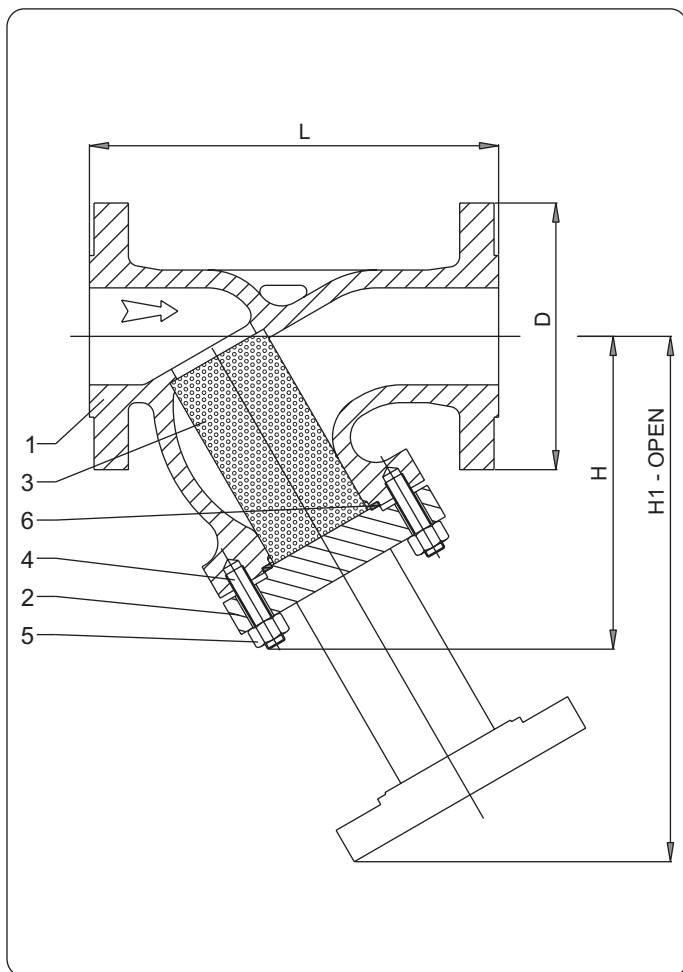

standard features

- **Description** BOLTED COVER
REPLACEABLE SCREEN
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	G1404 - (CAST IRON)	A1433 A1560YS A1570YS A1580YS	FK1433 FK1560YS FK1570YS FK1580YS
1 Body	EN-GJL-250	1.0619 (A)	1.4581
2 Cover	EN-GJL-250	1.0619 (B)	1.4581
3 Screen	X5CrNi18-10 (1)	X5CrNi18-10 (1)	X2CrNiMo17-12-2 (1)
4 Bolts	CK35	CK35	A2-70
5 Nuts	C35	C35	A2-70
6 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)

- (1) On request: other materials
(2) On request: PTFE - other materials

- (A) For PN ≤ 40 and DN ≤ 25 = 1.0460
For PN ≥ 63 and DN ≤ 25 = 1.0460
(B) For PN ≤ 40 and DN ≤ 80 = 1.0460
For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

STRAINERS - 'Y' TYPE

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1404 - STRAINERS - 'Y' TYPE DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
H	70	80	85	100	110	115	130	145	165	185	205	235	250	300	360	410	460	520	570	--
H1	130	144	155	172	200	220	265	290	340	390	440	505	520	680	845	870	1000	--	--	--

FIG.1433 - STRAINERS - 'Y' TYPE DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
H	70	80	85	100	110	125	145	160	190	220	250	295	320	385	450	510	585	610	670	--
H1	130	144	155	172	200	230	280	305	365	425	485	565	590	765	935	970	1125	--	--	--

FIG. 1560YS - STRAINERS - 'Y' TYPE DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	--	1400	1600
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	--	800	930
H	105	120	120	135	150	160	180	200	230	280	310	340	390	430	500	--	--	--	--	--
H1	165	184	190	207	240	265	315	345	405	485	545	610	660	810	985	--	--	--	--	--

FIG. 1570YS - STRAINERS - 'Y' TYPE DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
H	105	120	120	135	150	170	200	220	250	300	350	380	410	480	570	--	--	--	--	--
H1	165	184	190	207	240	275	335	365	425	505	585	650	680	860	1055	--	--	--	--	--

FIG. 1580YS - STRAINERS - 'Y' TYPE DIN PN 160 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	390	430	515	585	--	--	--	--	--
H	110	125	125	140	155	180	220	240	270	320	370	400	430	500	600	--	--	--	--	--
H1	170	189	195	212	245	285	355	385	445	525	605	670	700	880	1085	--	--	--	--	--

features on request

- SCREEN IN SPECIAL MATERIALS
- DISCHARGE VALVE
- DRAIN PLUG
- BW ENDS
- ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED


A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

standard features

- **Description** BOLTED COVER
REPLACEABLE SCREEN
- **Design** DIN 3352
DIN 3840
- **Face to face** DIN 3202
- **Flanges** DIN 2501
DIN 2547
DIN 2526 FORM E
BW TO DIN 3239
- **Testing** DIN 3352 Part 1
DIN 3230 Part 3
- **Rating** DIN 2401
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

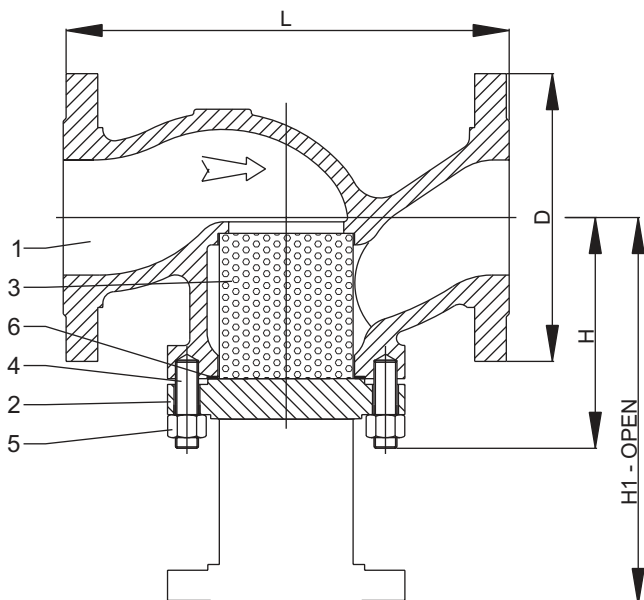

PART NAME	FIG. 1401 - (CAST IRON)	A1430BS A1560BS A1570BS A1580BS	FK1430BS FK1560BS FK1570BS FK1580BS
1 Body	EN-GJL-250	1.0619 (A)	1.4581
2 Cover	EN-GJL-250	1.0619 (B)	1.4581
3 Screen	X5CrNi18-10 (1)	X5CrNi18-10 (1)	X2CrNiMo17-12-2 (1)
4 Bolts	CK35	CK35	A2-70
5 Nuts	C35	C35	A2-70
6 Gasket	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)	S. S. reinforced graphite (3)

(1) On request: other materials

(2) On request: PTFE - other materials

(A) For PN ≤ 40 and DN ≤ 25 = 1.0460

For PN ≥ 63 and DN ≤ 25 = 1.0460

(B) For PN ≤ 40 and DN ≤ 80 = 1.0460

For PN ≥ 63 and DN ≤ 40 = 1.0460

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

STRAINERS - BASKET TYPE

DIN PN 16 - 25 - 40 - 63 - 100 - 160

VALVOSIDER
MANUFACTURER OF VALVES

FIG. 1401BS - STRAINERS - BASKET TYPE DIN PN 16 - CAST IRON - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D	95	105	115	140	150	165	185	200	220	250	285	315	340	405	460	520	580	640	715	840
H	70	80	85	100	110	115	130	145	165	185	205	235	250	300	360	410	460	520	570	--
H1	130	144	155	172	200	220	265	290	340	390	440	505	520	680	845	870	1000	520	570	--

FIG.1430BS - STRAINERS - BASKET TYPE DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
H	70	80	85	100	110	125	145	160	190	220	250	295	320	385	450	510	585	610	670	--
H1	130	144	155	172	200	230	280	305	365	425	485	565	590	765	935	970	1125	610	670	--

FIG. 1560BS - STRAINERS - BASKET TYPE DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	--	1400	1600
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	--	800	930
H	105	120	120	135	150	160	180	200	230	280	310	340	390	430	500	--	--	--	--	--
H1	165	184	190	207	240	265	315	345	405	485	545	610	660	810	985	--	--	--	--	--

FIG. 1570BS - STRAINERS - BASKET TYPE DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
H	105	120	120	135	150	170	200	220	250	300	350	380	410	480	570	--	--	--	--	--
H1	165	184	190	207	240	275	335	365	425	505	585	650	680	860	1055	--	--	--	--	--

FIG. 1580BS - STRAINERS - BASKET TYPE DIN PN 160 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	390	430	515	585	--	--	--	--	--
H	110	125	125	140	155	180	220	240	270	320	370	400	430	500	600	--	--	--	--	--
H1	170	189	195	212	245	285	355	385	445	525	605	670	700	880	1085	--	--	--	--	--

features on request

- ☐ SCREEN IN SPECIAL MATERIALS
- ☐ DISCHARGE VALVE
- ☐ DRAIN PLUG
- ☐ BW ENDS
- ☐ ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.



ISO 9001-2000
CERTIFIED

A.N.C.C.
I.S.P.E.S.L.
NOTIFIED



VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DESIGN AND MANUFACTURE OF VALVES *your partner in valves*



1 Special Executions

page 116

2 Dimensions

page 119

ASME

3 Materials & Trim

page 124

4 Ratings

page 125

5 Dimensions

page 128

6 Materials

page 132

DIN

7 Materials comparison

page 133

8 Ratings


page 134

9 Flow data


page 135

10 Tables


page 136




1 ISO top flange

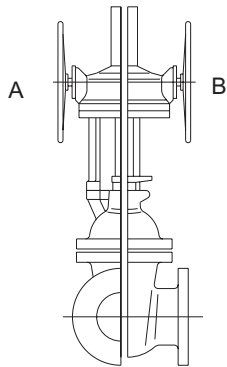


2 Bevel gearing

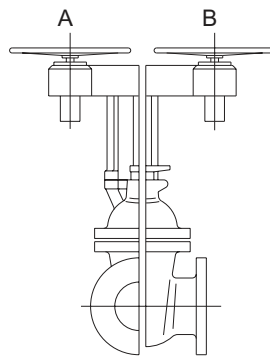


3 Bevel gearing with horizontal handwheel




4 Chain wheel

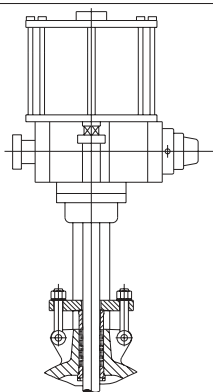


5 Pneumatic actuator

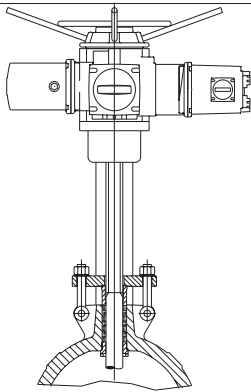


6 Electric actuator

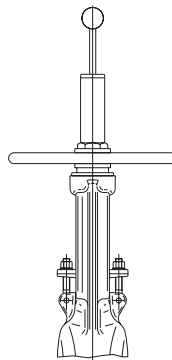


7 Position indicator




8 Position indicator




9 Position indicator for globe valve

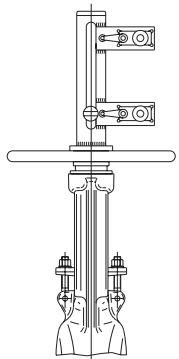


10 Position indicator with limit switches

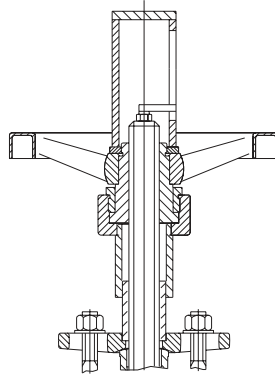


11 Position indicator with stem protection




12 Position indicator with limit switches

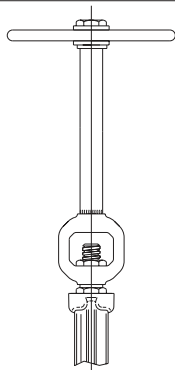


13 Extension stem

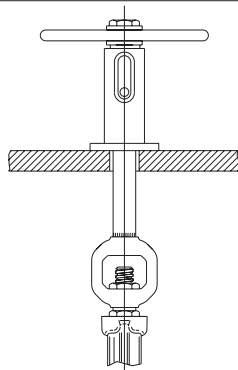

14 Floor stand

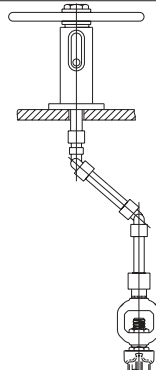


15 Floor stand with universal joint




16 Travel limit

All data, subject to technical changes, are only for information and not for official use.


VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com




17 Locking device with padlock and chain




18 Locking system

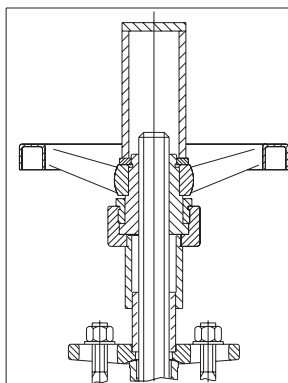


19 Stem protection




20 Stem protection for globe valve




21 Lantern ring




22 Lantern ring with double ball grease injector




23 Spring loaded on stuffing box




24 Spring loaded on eye bolts




25 Solid wedge




26 Flexible wedge

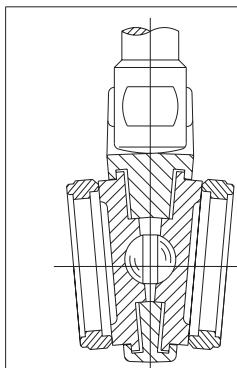


27 Split wedge

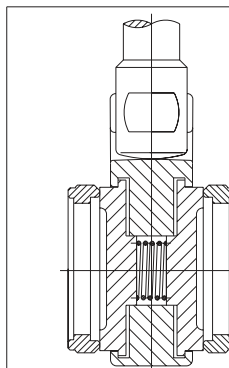


28 Parallel disk

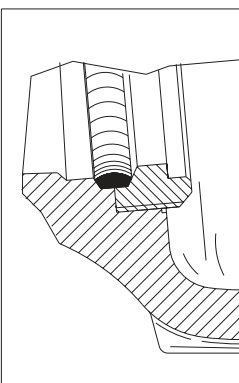


29 Welded seat ring



30 Soft seal on seat ring




31 Soft seal on wedge




32 Stop check


All data, subject to technical changes, are only for information and not for official use.




33 Stop check with spring




34 Guided disk




35 Double stage opening disk




36 Parabolic / regulating disk




37 Soft seated disk




38 Swing check valve with outside lever and weight




39 Swing check valve with shock absorber




40 Soft seated disk for check valve




41 Swing check valve with lifting eyebolt




42 Strainer Y type with drain plug




43 Strainer Y type with flange connection




44 Body / bonnet seal weld




45 Pressure seal construction



46 By pass (front view)



47 By pass (top view)




48 Flanges connection

All data, subject to technical changes, are only for information and not for official use.

FLANGES DIMENSIONS - ASME B16.5

SIZES 1/2" ÷ 24" - CLASSES 150 ÷ 2500

VALVOSIDER
MANUFACTURER OF VALVES

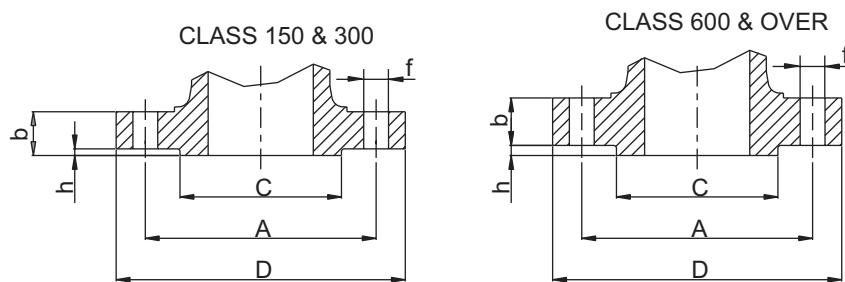

DN = Nominal pipe size (inches)
D = Outside diameter of flange
b* = Thickness of flange min.
C = Diameter of hub
h = Height of raised face
N = Number of bolt holes
f = Diameter of bolt holes
A = Diameter of bolt circle
RJ = Groove number

* raised face included for ANSI Class 150-300
raised face not included for ANSI Class 600-900-1500-2500


CLASS	DN	D	b	C	h	N	f	A	RJ	CLASS	DN	D	b	C	h	N	f	A	RJ
150	1/2"	89	11,1	34,9	1,60	4	15	60,3	--	150	6"	279	25,4	216	1,6	8	22	241	43
300	1/2"	95	14,3	34,9	1,60	4	15	66,7	11	300	6"	318	36,5	216	1,6	12	22	270	45
600	1/2"	95	14,3	34,9	6,35	4	15	66,7	11	600	6"	356	47,6	216	6,35	12	30	292	45
900-1500	1/2"	121	22,2	34,9	6,35	4	22	82,5	12	900	6"	381	55,6	216	6,35	12	32	318	45
150	3/4"	98,4	12,7	42,9	1,60	4	15	69,8		1500	6"	394	82,6	216	6,35	12	39	318	46
300	3/4"	118	15,9	42,9	1,60	4	18	82,5	13	2500	6"	483	108	216	6,35	8	54	368	47
600	3/4"	118	15,9	42,9	6,35	4	18	82,5	13	150	8"	343	28,6	270	1,6	8	22	298	48
900-1500	3/4"	130	25,4	42,9	6,35	4	22	88,9	14	300	8"	381	41,3	270	1,6	12	26	330	49
150	1"	108	14,3	50,8	1,60	4	15	79,4	15	600	8"	419	55,6	270	6,35	12	32	349	49
300	1"	124	17,5	50,8	1,60	4	19	88,9	16	900	8"	470	63,5	270	6,35	12	39	394	49
600	1"	124	17,5	50,8	6,35	4	19	88,9	16	1500	8"	483	92,1	270	6,35	12	45	394	50
900-1500	1"	149	28,6	50,8	6,35	4	25	102	16	2500	8"	552	127	270	6,35	12	54	438	51
150	1 1/4"	118	15,9	63,5	1,60	4	15	88,9	17	150	10"	406	30,2	324	1,6	12	25	362	52
300	1 1/4"	133	19	63,5	1,60	4	18	98,4	18	300	10"	445	47,6	324	1,6	16	28,6	387	53
600	1 1/4"	133	20,6	63,5	6,35	4	18	98,4	18	600	10"	508	63,5	324	6,35	16	36	432	53
900-1500	1 1/4"	159	28,6	63,5	6,35	4	26	111	18	900	10"	546	69,8	324	6,35	16	38,1	470	53
150	1 1/2"	127	17,5	73	1,60	4	15	98,4	19	1500	10"	584	108	324	6,35	12	52	483	54
300	1 1/2"	156	20,6	73	1,60	4	22	114	20	2500	10"	673	165	324	6,35	12	67	540	55
600	1 1/2"	156	22,2	73	6,35	4	22	114	20	150	12"	483	31,7	381	1,6	12	26	432	56
900-1500	1 1/2"	178	31,8	73	6,35	4	30	124	20	300	12"	521	50,8	381	1,6	16	32	451	57
150	2"	152	19	92,1	1,60	4	19	121	22	600	12"	559	66,7	381	6,35	20	36	490	57
300	2"	165	22,2	92,1	1,60	8	18	127	23	900	12"	610	79,4	381	6,35	20	39	533	57
600	2"	165	25,4	92,1	6,35	8	18	127	23	1500	12"	673	124	381	6,35	16	55	572	58
900-1500	2"	216	38,1	92,1	6,35	8	26	165	24	2500	12"	762	184	381	6,35	12	73	619	60
2500	2"	235	50,8	92,1	6,35	8	29	171	26	150	14"	533	34,9	413	1,6	12	29	476	59
150	2 1/2"	178	22,2	105	1,60	4	19	140	25	300	14"	584	54	413	1,6	20	32	514	61
300	2 1/2"	191	25,4	105	1,60	8	22	149	26	600	14"	603	69,8	413	6,35	20	39	527	61
600	2 1/2"	191	28,6	105	6,35	8	22	149	26	900	14"	641	85,7	413	6,35	20	42	559	62
900-1500	2 1/2"	245	41,3	105	6,35	8	30	191	27	1500	14"	749	133	413	6,35	16	60	635	63
2500	2 1/2"	267	57,2	105	6,35	8	32	197	28	150	16"	597	36,5	470	1,6	16	28	540	64
150	3"	191	23,8	127	1,60	4	19	152	29	300	16"	648	57,2	470	1,6	20	36	572	65
300	3"	210	28,6	127	1,60	8	22	168	31	600	16"	686	76,2	470	6,35	20	42	603	65
600	3"	210	31,8	127	6,35	8	22	168	31	900	16"	705	88,9	470	6,35	20	45	616	66
900	3"	241	38,1	127	6,35	8	25	191	31	1500	16"	826	146	470	6,35	16	65	705	67
1500	3"	267	47,6	127	6,35	8	32	203	35	150	18"	635	39,7	533	1,6	16	32	578	68
2500	3"	305	66,7	127	6,35	8	34,9	229	32	300	18"	711	60,3	533	1,6	24	36	629	69
150	4"	229	23,8	157	1,60	8	19	191	36	600	18"	743	82,6	533	6,35	20	45	654	69
300	4"	254	31,7	157	1,60	8	22	200	37	900	18"	787	102	533	6,35	20	52	686	70
600	4"	273	38,1	157	6,35	8	26	216	37	1500	18"	914	162	533	6,35	16	75	775	71
900	4"	292	44,45	157	6,35	8	32	235	37	150	20"	699	42,9	584	1,6	20	32	635	72
1500	4"	311	54	157	6,35	8	35	241	39	300	20"	775	63,5	584	1,6	24	36	686	73
2500	4"	356	76,2	157	6,35	8	41	273	38	600	20"	813	88,9	584	6,35	24	45	724	73
150	5"	254	23,8	186	1,60	8	22	216	40	900	20"	857	108	584	6,35	20	55	749	74
300	5"	279	34,9	186	1,60	8	22	235	41	1500	20"	984	178	584	6,35	16	80	832	75
600	5"	330	44,4	186	6,35	8	28	267	41	150	24"	813	47,6	692	1,6	20	36	749	76
900	5"	349	50,8	186	6,35	8	36	279	41	300	24"	914	69,8	692	1,6	24	42	813	77
1500	5"	375	73	186	6,35	8	42	292	44	600	24"	940	102	692	6,35	24	52	838	77
2500	5"	416	92,1	186	6,35	8	48	324	42	900	24"	1041	140	692	6,35	20	65	902	78
										1500	24"	1168	203	692	6,35	16	93	991	79

All dimensions in mm (except where differently indicated)


All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

CLASS 150 & 300

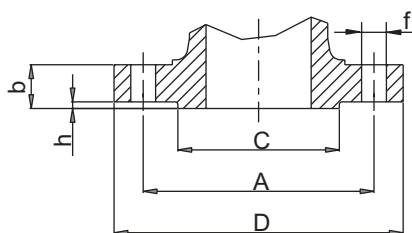

CLASS 600 & OVER

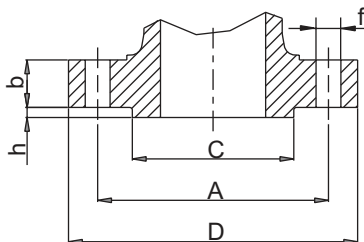

DN = Nominal pipe size (inches)
D = Outside diameter of flange
b* = Thickness of flange min.
C = Diameter of hub
h = Height of raised face
N = Number of bolt holes
f = Diameter of bolt holes
A = Diameter of bolt circle
RJ = Groove number

* raised face included for ANSI Class 150-300
raised face not included for ANSI Class 600-900

CLASS	DN	D	b	C	h	N	f	A	RJ	CLASS	DN	D	b	C	h	N	f	A	RJ
150	26"	870	68,3	749	1,6	24	35,1	806		150	38"	1238	87,4	1073	1,6	32	41,1	1149	
300	26"	972	79,2	749	1,6	28	44,5	876	93	300	38"	1168	108,0	1029	1,6	32	41,1	1092	
600	26"	1016	108,0	749	1,6	28	50,8	914	93	600	38"	1270	152,4	1054	1,6	28	60,5	1162	
900	26"	1086	139,7	953	1,6	20	73,2	953	100	900	38"	1461	190,5	1289	1,6	20	91,9	1289	
150	28"	927	71,4	800	1,6	28	35,1	864		150	40"	1289	90,4	1124	1,6	36	41,1	1200	
300	28"	1035	85,9	800	1,6	28	44,5	940	94	300	40"	1238	114,3	1086	1,6	32	44,5	1156	
600	28"	1073	111,3	800	1,6	28	53,8	965	94	600	40"	1321	158,8	1111	1,6	32	60,5	1213	
900	28"	1168	142,7	1022	1,6	20	79,2	1022	101	900	40"	1511	196,9	1340	1,6	24	91,9	1340	
150	30"	984	74,7	857	1,6	28	35,1	914		150	42"	1346	96,8	1194	1,6	36	41,1	1257	
300	30"	1092	91,9	857	1,6	28	47,8	997	95	300	42"	1289	119,1	1137	1,6	32	44,5	1207	
600	30"	1130	114,3	857	1,6	28	53,8	1022	95	600	42"	1403	168,1	1168	1,6	28	66,5	1283	
900	30"	1232	149,4	1086	1,6	20	79,2	1086	102	900	42"	1562	206,2	1391	1,6	24	91,9	1391	
150	32"	1060	81,0	914	1,6	28	41,1	978		150	44"	1403	101,6	1245	1,6	40	41,1	1314	
300	32"	1149	98,6	914	1,6	28	50,8	1054	96	300	44"	1353	124,0	1194	1,6	32	47,8	1264	
600	32"	1194	117,3	914	1,6	28	60,5	1080	96	600	44"	1454	173,0	1226	1,6	32	66,5	1334	
900	32"	1314	158,8	1156	1,6	20	85,9	1156	103	900	44"	1648	214,4	1464	1,6	24	98,6	1464	
150	34"	1111	82,6	965	1,6	32	41,1	1029		150	46"	1454	103,1	1295	1,6	40	41,1	1365	
300	34"	1207	101,6	965	1,6	28	50,8	1105	97	300	46"	1416	128,5	1245	1,6	28	50,8	1321	
600	34"	1245	120,7	965	1,6	28	60,5	1130	97	600	46"	1511	179,3	1276	1,6	32	66,5	1391	
900	34"	1397	165,1	1226	1,6	20	91,9	1226	104	900	46"	1734	225,6	1537	1,6	24	105	1537	
150	36"	1168	90,4	1022	1,6	32	41,1	1086		150	48"	1511	108,0	1359	1,6	44	41,1	1422	
300	36"	1270	104,6	1022	1,6	32	53,8	1168	98	300	48"	1467	133,4	1302	1,6	32	50,8	1372	
600	36"	1314	124,0	1022	1,6	28	66,5	1194	98	600	48"	1594	189,0	1334	1,6	32	73,2	1461	
900	36"	1461	171,5	1289	1,6	20	91,9	1289	105	900	48"	1784	233,4	1588	1,6	24	105	1588	

FLANGES FACING FINISH

NOMINAL ROUGHNESS GRADES (R_a) FOR
ROUGHNESS COMPARISON SPECIMENS - ASME B46.1

μm	$\mu\text{in.}$
0.006	0.25
0.0125	0.5
0.025	1
0.05	2
0.1	4
0.2	8
0.4	16
0.8	32
1.6	63
3.2	125
6.3	250
12.5	500
25	1,000
50	2,000
100	4,000
200	8,000
400	16,000

ASME B16.5

TONGUE AND GROOVE - SMALL MALE AND FEMALE

The gasket contact surface shall not exceed 125 microinches (3,2 micrometers) roughness.

RING JOINT

The side wall surface of gasket groove shall not exceed 63 microinches (1,6 micrometers) roughness.

OTHER FLANGE FACINGS

Either a serrated concentric or serrated spiral finish having a resultant surface finish from 125 microinches to 250 microinches (3,2 to 6,3 micrometers) average roughness.

MSS SP-6 - steel

FLAT OR 1/6" (1.6 mm) RAISED FACE AND 1/4" (6.4 mm) RAISED AND LARGE MALE & FEMALE

Serrated: spiral or concentric, 45 to 55 per inch (18 to 21 per cm). Surface finish shall have a 125 to 250 microinches (3.2 to 6.3 micrometers) R_a .

SMALL MALE & FEMALE, LARGE & SMALL TONGUE & GROOVE

Serrated (as above) or non-serrated:

125 microinches (3,2 micrometers) R_a max.


RING JOINT

Non-serrated: 63 microinches (1.6 micrometers) R_a max. according to ASME B46.1.

The finish of contact faces of pipe flanges and connecting end flanges of fittings shall be judged by visual comparison with R_a standards.

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

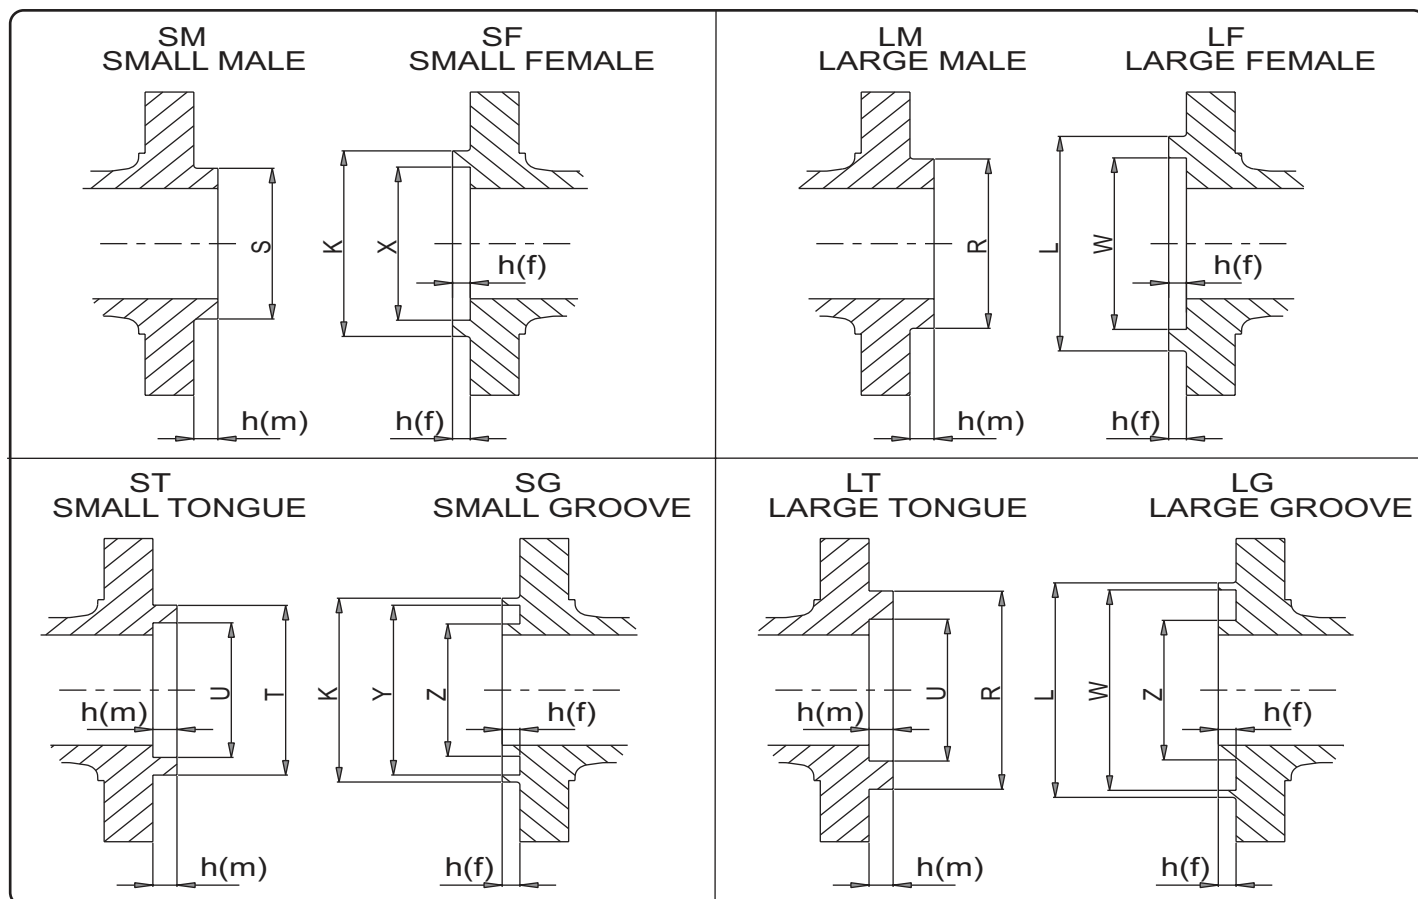

FACE TO FACE DIMENSIONS - ASME B16.10

CLASS	RF	MALE	FEMALE
150 / 300	SEE CATALOGUE	RF + 13 mm	RF + 10 mm
600 / 900 / 1500	SEE CATALOGUE	RF	RF - 3 mm

DIMENSIONS OF FACING (mm)

Nominal pipe size (inches)	OUTSIDE DIAMETER			INT. DIAM.	OUTSIDE DIAMETER			INT. DIAM.	RAISED FACE HEIGHT		Depth of groove or female	OUTSIDE DIAMETER OF RAISED PORTION	
	Raised face, lapped, large male and large tongue	Small male **	Small tongue	Large and small tongue	Large female and large groove	Small female	Small groove	Large and small groove **	150 and 300 Lbs. Class	Large and small male and tongue 400/2500 Lbs. Class		Small Female and Groove (min.)	Large Female and Groove (min.)
	R	S	T	U	W	X	Y	Z	h	h(m)	h(f)	K	L
1"1/2	73,1	44,4	63,5	53,8	74,6	45,9	65	52,3	1,6	6,35	4,8	84,1	84,1
2"	91,8	57,1	82,5	73,1	93,7	58,7	84,1	71,4	1,6	6,35	4,8	103,1	103,1
2"1/2	104,6	68,3	95,2	85,8	106,4	69,8	96,8	84,1	1,6	6,35	4,8	115,8	115,8
3"	127,0	84,1	117,3	107,9	128,5	85,8	119,1	106,4	1,6	6,35	4,8	138,2	138,2
4"	157,2	109,5	144,5	131,8	158,7	111,2	146,0	130,0	1,6	6,35	4,8	168,1	168,1
5"	185,7	136,6	173,0	160,3	187,4	138,1	174,7	158,7	1,6	6,35	4,8	196,8	196,8
6"	215,9	162,0	203,2	190,5	217,5	163,5	204,7	188,9	1,6	6,35	4,8	227,0	227,0
8"	269,7	212,8	254,0	238,2	271,5	214,3	255,5	236,5	1,6	6,35	4,8	281,0	281,0
10"	323,8	266,7	304,8	285,7	325,4	268,2	306,3	284,2	1,6	6,35	4,8	335,0	335,0
12"	381,0	317,5	361,9	342,9	382,5	319,0	363,5	341,3	1,6	6,35	4,8	392,1	392,1
14"	412,7	349,2	393,7	374,6	414,3	350,8	395,3	373,1	1,6	6,35	4,8	423,9	423,9
16"	469,9	400,0	447,5	425,4	471,4	401,6	449,3	423,9	1,6	6,35	4,8	481,0	481,0
18"	533,4	450,8	511,0	488,9	535,0	452,4	512,8	487,4	1,6	6,35	4,8	544,5	544,5
20"	584,2	501,6	558,8	533,4	585,7	503,2	560,3	531,8	1,6	6,35	4,8	595,3	595,3
24"	692,1	603,2	666,7	641,3	693,7	604,8	668,8	639,8	1,6	6,35	4,8	703,3	703,3


**Large male and female faces and large tongue and groove are not applicable to Class 150 because of potential dimensional conflict.

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com


BUTT WELDING ENDS - ASME B16.25

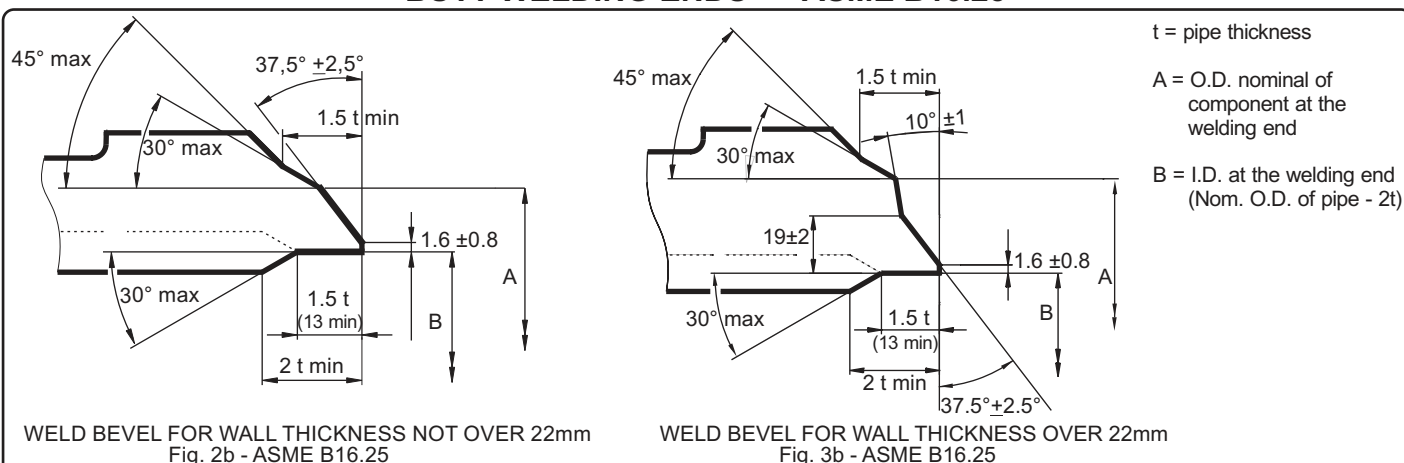

DN (inches)	Nom. pipe O.D.	A (1)	Wall thickness of pipe											
			sch. 20	sch. 30	sch. Std	sch. 40	sch. 60	sch. xs	sch. 80	sch. 100	sch. 120	sch. 140	sch. 160	sch. xxs
1" 1/2	48.3	n.a.			3.68	3.68		5.08	5.08				7.14	10.16
2"	60.3	n.a.			3.91	3.91		5.54	5.54				8.74	11.07
2" 1/2	73.0	75			5.16	5.16		7.01	7.01				9.52	14.02
3"	88.9	91			5.49	5.49		7.62	7.62				11.13	15.24
4"	114.3	117			6.02	6.02		8.56	8.56		11.13		13.49	17.12
5"	141.3	144			6.55	6.55		9.52	9.52		12.70		15.88	19.05
6"	168.3	172			7.11	7.11		10.97	10.97		14.27		18.26	21.95
8"	219.1	223	6.35	7.04	8.18	8.18	10.31	12.70	12.70	15.09	18.26	20.62	23.01	22.22
10"	273.0	278	6.35	7.80	9.27	9.27	12.70	12.70	15.09	18.26	21.44	25.40	28.58	25.40
12"	323.8	329	6.35	8.38	9.52	10.31	14.27	12.70	17.48	21.44	25.40	28.57	33.32	
14"	355.6	362	7.92	9.52	9.52	11.12	15.09	12.70	19.05	23.83	27.76	31.75	35.71	
16"	406.4	413	7.92	9.52	9.52	12.70	16.66	12.70	21.44	26.19	30.94	36.52	40.46	
18"	457.2	464	7.92	11.13	9.52	14.27	19.05	12.70	23.83	29.36	34.92	39.67	45.24	
20"	508.0	516	9.52	12.70	9.52	15.06	20.62	12.70	26.19	32.54	38.10	44.45	49.99	
24"	609.6	619	9.52	14.27	9.52	17.45	24.59	12.70	30.94	38.89	46.02	52.37	59.51	

(1) The diameters listed are not requirements

SOCKET WELDING ENDS - ASME B16.11 (not for auxiliary connections - see ASME B16.34)

	DN mm	Nominal pipe size (inches)	B mm (min.)	J mm (min.)	Class 3000 Sch. 80		Class 6000 Sch. 160		Class 9000 Wall Des. XXS	
					C mm (min.)	D mm (min.)	C mm (min.)	D mm (min.)	C mm (min.)	D mm (min.)
	6	1/8"	10,8	9,5	3,18	6,1	3,43	3,2	--	--
	8	1/4"	14,2	9,5	3,30	8,5	4,01	5,6	--	--
	10	3/8"	17,6	9,5	3,50	11,8	4,37	8,4	--	--
	15	1/2"	21,8	9,5	4,09	15,0	5,18	11,0	5,94	5,6
	20	3/4"	27,2	12,5	4,27	20,2	6,04	14,8	6,93	10,3
	25	1"	33,9	12,5	4,98	25,9	6,93	19,9	7,95	14,4
	32	1" 1/4	42,7	12,5	5,28	34,3	9,93	28,7	7,95	22,0
	40	1" 1/2	48,8	12,5	5,54	40,1	7,80	33,2	8,91	27,2
	50	2"	61,2	16,0	6,04	51,7	9,50	42,1	10,89	37,4
	65	2" 1/2	73,9	16,0	7,67	61,2	--	--	--	--
	80	3"	89,8	16,0	8,30	76,4	--	--	--	--
	100	4"	115,2	16,0	9,35	100,7	--	--	--	--

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.


VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

AUXILIARY CONNECTIONS - ASME B16.34


NPT - THREADS - ASME B1.20.1

VALVOSIDER
MANUFACTURER OF VALVES


AUXILIARY CONNECTION - TAPS - DRAINS - BY PASSES

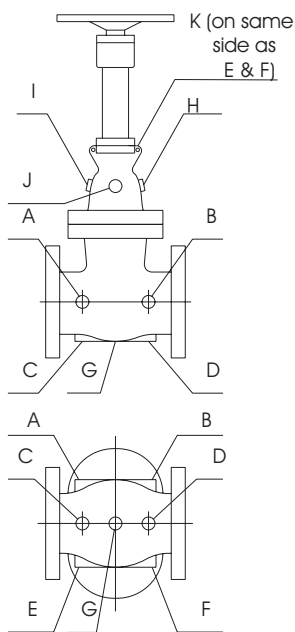

GATE VALVE

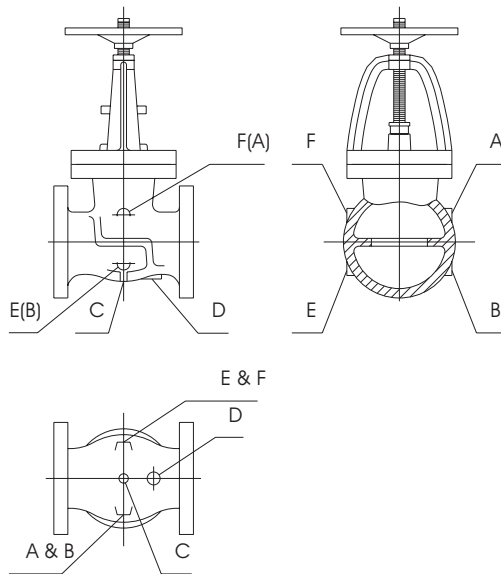


GLOBE VALVE

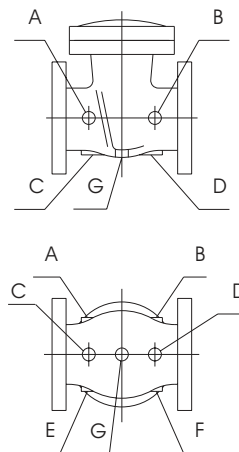


CHECK VALVE


AUXILIARY CONNECTIONS - BYPASS AND DRAIN CONNECTIONS




BOSS



THREAD LENGTH




SOCKET WELDING



BUTT WELDING

Size of Valve	2" to 4"	5" to 8"	10" to 24"
Size of Connections	1/2"	3/4"	1"
Length of Thread T	14	14	18
Min.Diam. of Socket A	22	27	34
Min.Depth. of Socket B	5	6.5	6.5
Diameter of Boss J	38	44	54
Size of Tapping	1/2"	3/4"	1"

NPT THREAD STANDARDS - ASME B1.20.1

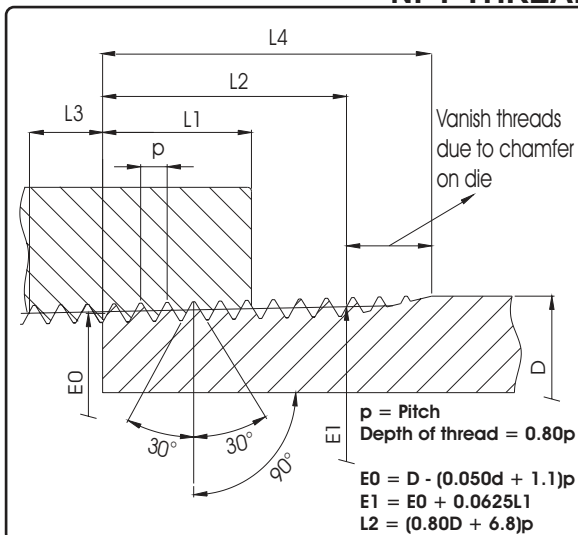

NOMINAL PIPE SIZE (INCH)	OUTSIDE DIAMETER OF PIPE	THREADS PER INCH	PITCH OF THREAD	HANDTIGHT ENGAGEMENT	LENGTH OF EFFECTIVE THREAD (EXTERNAL)	WRENCH MAKEUP LENGTH FOR INTERNAL THREAD	OVERALL LENGTH EXTERNAL THREAD	PITCH DIAM. AT BEGINNING OF EXTERNAL THREAD
DN	D	(n)	P	L1	L2	L3	L4	E0
1/8	10,29	27	0,940	4,572	6,703	2,822	9,967	9,233
1/4	13,72	18	1,412	5,080	10,206	4,234	15,103	12,126
3/8	17,14	18	1,412	6,096	10,358	4,234	15,255	15,545
1/2	21,34	14	1,814	8,128	13,556	5,443	19,850	19,263
3/4	26,67	14	1,814	8,611	13,861	5,443	20,155	24,58
1	33,40	11,5	2,210	10,160	17,343	6,627	25,006	30,825
1 1/4	42,16	11,5	2,210	10,668	17,953	6,627	25,616	39,55
1 1/2	48,26	11,5	2,210	10,668	18,377	6,627	26,040	45,621
2	60,32	11,5	2,210	11,074	19,215	6,627	26,878	57,633

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

	ASTM		chemical composition %									mechanical properties			
	Number	Grade	C	Mn	P	S	Si	Cr	Mo	Ni	others	R Mpa	S Mpa	% Ap.	% C
CASTINGS	A 216	WCB	max. 0,30	max. 1,00	max. 0,04	max. 0,045	max. 0,60	--	--	--	--	485	250	22	35
	A 352	LCB	max. 0,30	max. 1,00	max. 0,04	max. 0,045	max. 0,60	--	--	--	--	450	240	24	35
	A 352	LC 2	max. 0,25	0,50 - 0,80	max. 0,04	max. 0,045	max. 0,60	--	--	2,00 - 3,00	--	485	275	24	35
	A 352	LC 3	max. 0,15	0,50 - 0,80	max. 0,04	max. 0,045	max. 0,60	--	--	3,00 - 4,00	--	485	275	24	35
	A 217	WC 1	max. 0,25	0,50 - 0,80	max. 0,04	max. 0,045	max. 0,60	--	0,45 - 0,65	--	--	450	240	24	35
	A 217	WC 5	max. 0,20	0,40 - 0,70	max. 0,04	max. 0,045	max. 0,60	0,50 - 0,90	0,90 - 1,20	0,60 - 1,00	--	485	275	20	35
	A 217	WC 6	max. 0,20	0,50 - 0,80	max. 0,04	max. 0,045	max. 0,60	1,00 - 1,50	0,45 - 0,65	--	--	485	275	20	35
	A 217	WC 9	max. 0,18	0,40 - 0,70	max. 0,04	max. 0,045	max. 0,60	2,00 - 2,75	0,90 - 1,20	--	--	485	275	20	35
	A 217	C 5	max. 0,20	0,40 - 0,70	max. 0,04	max. 0,045	max. 0,75	4,00 - 6,50	0,45 - 0,65	--	--	620	415	18	35
	A 217	C 12	max. 0,20	0,35 - 0,65	max. 0,04	max. 0,045	max. 1,00	8,00 - 10,00	0,90 - 1,20	--	--	620	515	18	35
	A 217	CA 15	max. 0,15	max. 1,00	max. 0,04	max. 0,04	max. 1,50	11,50 - 14,00	max. 0,50	max. 1,00	--	620	450	18	30
	A 351	CF 3	max. 0,03	max. 1,50	max. 0,04	max. 0,04	max. 2,00	17,00 - 21,00	max. 0,50	8,00 - 12,00	--	485	205	35	--
	A 351	CF 8	max. 0,08	max. 1,50	max. 0,04	max. 0,04	max. 2,00	18,00 - 21,00	max. 0,50	8,00 - 11,00	--	485	205	35	--
	A 351	CF 8 C	max. 0,08	max. 1,50	max. 0,04	max. 0,04	max. 2,00	18,00 - 21,00	--	9,00 - 12,00	Cb min. 8xC max. 1,00	485	205	30	--
	A 351	CF 3 M	max. 0,03	max. 1,50	max. 0,04	max. 0,04	max. 1,50	17,00 - 21,00	2,00 - 3,00	9,00 - 13,00	--	485	205	30	--
	A 351	CF 8 M	max. 0,08	max. 1,50	max. 0,04	max. 0,04	max. 1,50	18,00 - 21,00	2,00 - 3,00	9,00 - 12,00	--	485	205	30	--
	A 351	CG 8M	max. 0,08	max. 1,50	max. 0,04	max. 0,04	max. 1,50	18,00 - 21,00	3,00 - 4,00	9,00 - 13,00	--	515	240	25	--
	A 351	CK3MCuN	max. 0,025	max. 1,20	max. 0,045	max. 0,01	max. 1,00	19,50 - 20,50	6,00 - 7,00	17,50 - 19,50	Cu 0,5 - 1,00 N 0,18-0,24	550	260	35	--
	A 351	CN7M	max. 0,07	max. 1,50	max. 0,04	max. 0,04	max. 1,50	19,00 - 22,00	2,00 - 3,00	27,50 - 30,50	Cu 3,0 - 4,0	425	170	35	--
	A 890	4A	max. 0,03	max. 1,50	max. 0,04	max. 0,02	max. 1,0	21,00 - 23,50	2,50 - 3,50	4,50 - 6,50	Cu max 1,00 N 0,10-0,30	620	415	25	--
	A 890	5A	max. 0,03	max. 1,50	max. 0,04	max. 0,04	max. 1,0	24,00 - 26,00	4,00 - 5,00	6,00 - 8,00	N 0,10-0,30	690	515	18	--
	A 890	6A	max. 0,03	max. 1,00	max. 0,03	max. 0,025	max. 1,0	24,00 - 26,00	3,00 - 4,00	6,50 - 8,50	Cu&W 0,5-1,0 N 0,20-0,30	700	450	25	--
FORGINGS	A 105	II	max. 0,35	max. 0,90	max. 0,05	max. 0,05	max. 0,35	--	--	--	--	485	250	22	30
	A 181	CL 60	max. 0,35	max. 0,90	max. 0,05	max. 0,05	max. 0,35	--	--	--	--	415	205	22	35
	A 181	CL 70	max. 0,35	max. 0,90	max. 0,05	max. 0,05	max. 0,35	--	--	--	--	485	250	18	24
	A 350	LF 2	max. 0,35	0,60 - 1,35	max. 0,35	max. 0,04	0,15 - 0,30	max. 0,30	max. 0,12	max. 0,40	Cu max 0,40	485	250	22	30
	A 350	LF 3	max. 0,20	max. 0,90	max. 0,035	max. 0,04	0,20 - 0,35	--	--	3,30 - 3,70	--	485	260	22	35
	A 182	F 1	max. 0,28	0,60 - 0,90	max. 0,045	max. 0,045	0,15 - 0,35	--	0,44 - 0,65	--	--	485	275	20	30
	A 182	F 5	max. 0,15	0,30 - 0,60	max. 0,03	max. 0,03	max. 0,50	4,00 - 6,00	0,44 - 0,65	max. 0,50	--	485	275	20	35
	A 182	F 6a CL.2	max. 0,12	max. 1,00	max. 0,04	max. 0,03	max. 1,00	11,50 - 13,50	--	max. 0,50	--	585	380	18	35
	A 182	F 9	max. 0,15	0,30 - 0,60	max. 0,03	max. 0,03	0,50 - 1,00	8,00 - 10,00	0,90 - 1,10	--	--	585	380	20	40
	A 182	F 10	0,01 - 0,20	0,50 - 0,80	max. 0,03	max. 0,03	1,00 - 1,40	7,00 - 9,00	--	19,00 - 22,00	--	550	205	30	50
	A 182	F 11 CL.2	0,05 - 0,15	0,30 - 0,60	max. 0,03	max. 0,03	0,50 - 1,00	1,00 - 1,50	0,44 - 0,65	--	--	485	275	20	30
	A 182	F 12 CL.2	0,10 - 0,20	0,30 - 0,80	max. 0,04	max. 0,04	0,10 - 0,60	0,80 - 1,25	0,44 - 0,65	--	--	485	275	20	30
	A 182	F 20	max. 0,07	max. 2,00	max. 0,045	max. 0,035	max. 1,00	19,00 - 21,00	2,00 - 3,00	32,00 - 38,00	--	550	240	30	50
	A 182	F 22	0,05 - 0,15	0,30 - 0,60	max. 0,04	max. 0,04	max. 0,50	2,00 - 2,50	0,87 - 1,13	--	--	415	205	20	35
	A 182	F 44	max. 0,02	max. 1,00	max. 0,03	max. 0,01	max. 0,80	19,5 - 20,5	6,0 6,5	17,5 - 18,5	Cu 0,50-1,00 N 0,18-0,22	650	300	35	50
	A 182	F 51	max. 0,03	max. 2,00	max. 0,03	max. 0,02	max. 1,00	21,0 - 23,0	2,5 3,5	4,5 - 6,5	N min 0,08 max 0,20	620	450	25	45
	A 182	F 53	max. 0,03	max. 1,20	max. 0,035	max. 0,02	max. 0,80	24,0 - 26,0	3,0 5,0	6,0 - 8,0	Cu max 0,50 N 0,24-0,32	750	515	15	--
	A 182	F 304	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	18,00 - 20,00	--	8,00 - 11,00	--	515	205	30	50
	A 182	F 310	max. 0,15	max. 2,00	max. 0,045	max. 0,03	max. 1,00	24,00 - 26,00	--	19,00 - 22,00	--	515	205	30	50
	A 182	F 316	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	16,00 - 18,00	2,00 - 3,00	10,00 - 14,00	--	515	205	30	50
	A 182	F 316L	max. 0,035	max. 2,00	max. 0,045	max. 0,03	max. 1,00	16,00 - 18,00	2,00 - 3,00	10,00 - 15,00	--	485	170	30	50
	A 182	F 321	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	min. 17,00	--	9,00 - 12,00	Ti min. 5xC max. 0,70	515	205	30	50
	A 182	F 347	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	17,00 - 20,00	--	9,00 - 13,00	Cb min. 10xC max. 1,00	515	205	30	50
	AISI	431	max. 0,20	max. 1,00	max. 0,04	max. 0,03	max. 1,00	15,00 - 17,00	--	1,25 - 2,50	--	--	--	--	--
	17.4 PH	(R)	max. 0,07	max. 1,00	max. 0,04	max. 0,03	max. 1,00	15,00 - 17,50	max. 0,50	3,00 - 5,00	Cbmin. 8xC/max. 1 Cu 0,5-1,0	860	725	16	50
BOLTINGS	A 193	B 7	0,37 - 0,49	0,65 - 1,10	max. 0,035	max. 0,04	0,15 - 0,35	0,75 - 1,20	0,15 - 0,25	--	--	860	720	16	50
	A 193	B 16	0,36 - 0,47	0,45 - 0,70	max. 0,035	max. 0,04	0,15 - 0,35	0,80 - 1,15	0,50 - 0,65	--	Va 0,25-0,35	860	725	18	50
	A 193	B 8	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	18,00 - 20,00	--	8,00 - 10,50	--	*	*	*	*
	A 193	B 8M	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	16,00 - 18,00	2,00 - 3,00	10,00 - 14,00	--	*	*	*	*
	A 320	B 8	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	18,00 - 20,00	--	8,00 - 10,50	--	*	*	*	*
	A 320	L 7	0,38 - 0,48	0,75 - 1,00	max. 0,035	max. 0,04	0,15 - 0,35	0,80 - 1,10	0,15 - 0,25	--	--	860	725	16	50
	A 194	2 H	min. 0,40	max. 1,00	max. 0,04	max. 0,05	max. 0,4	--	--	--	--	--	--	--	--
	A 194	3	max. 0,10	max. 1,00	max. 0,04	max. 0,03	max. 1,00	4,00 - 6,00	0,40 - 0,65	--	--	--	--	--	--
	A 194	4	0,40 - 0,50	0,70 - 0,90	max. 0,035	max. 0,04	0,15 - 0,35	--	0,20 - 0,30	--	--	--	--	--	--
	A 194	8	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	18,00 - 20,00	--	8,00 - 10,50	--	--	--	--	--
	A 194	8M	max. 0,08	max. 2,00	max. 0,045	max. 0,03	max. 1,00	16,00 - 18,00	2,00 - 3,00	10,00 - 14,00	--	--	--	--	--

All data, subject to technical changes, are only for information and not for official use.

TRIM MATERIALS API STANDARD 600

VALVOSIDER
MANUFACTURER OF VALVES

API 600 TRIM No.	MATERIAL TYPE					SERVICE
	DISC / WEDGE SEAT SURFACES (1)	SEAT RING SURFACES (1)	STEM HINGE PIN (2)	BACK SEAT	SMALL INTERNAL PARTS	
1	13Cr	13Cr	13Cr	13Cr	13Cr	General erosive or non-corrosive service between -100 °C and 400 °C
2	18Cr - 8Ni	18Cr - 8Ni	18Cr - 8Ni	18Cr - 8Ni	18Cr - 8Ni	For moderate pressure in non-erosive, corrosive service between -265 °C and 320 °C
3	25Cr - 20Ni	25Cr - 20Ni	25Cr - 20Ni	25Cr - 20Ni	25Cr - 20Ni	For moderate pressure in corrosive or non corrosive service between -265 °C and 450 °C
4	Hard 13Cr	Hard 13Cr	13Cr	13Cr	13Cr	As trim No. 1 but for medium pressure
5	HF	HF	13Cr	13Cr	13Cr	High pressure slightly erosive and corrosive service between -265 °C and 650 °C
5A	HF (A)	HF (A)	13Cr	13Cr	13Cr	As trim No. 5 where Co is not allowed
6	13Cr	NiCu alloy	13Cr	13Cr	13Cr	As trim No. 1
7	13Cr	Hard 13Cr	13Cr	13Cr	13Cr	As trim No. 1 for moderate pressure
8	13Cr	HF	13Cr	13Cr	13Cr	As trim No. 5 for moderate pressure
8A	13Cr	HF (A)	13Cr	13Cr	13Cr	As trim No. 5A for moderate pressure
9	NiCu alloy	NiCu alloy	NiCu alloy	NiCu alloy	NiCu alloy	Very corrosive fluids, erosive-corrosive service between -240 °C and 480 °C
10	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	As trim No. 2
11	NiCu alloy	HF	NiCu alloy	NiCu alloy	NiCu alloy	As trim No. 9 but for medium pressure
12	18Cr - 8Ni - Mo	HF	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	As trim No. 10 but for medium pressure
13	19Cr - 29Ni	19Cr - 29Ni	19Cr - 29Ni	19Cr - 29Ni	19Cr - 29Ni	Very corrosive service, for moderate pressure between -45 °C and 320 °C
14	19Cr - 29Ni	HF	19Cr - 29Ni	19Cr - 29Ni	19Cr - 29Ni	As trim No. 13 but for medium pressure
15	HF	HF	18Cr - 8Ni	18Cr - 8Ni	18Cr - 8Ni	As trim No. 2
16	HF	HF	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	18Cr - 8Ni - Mo	As trim No. 10
17	HF	HF	18Cr - 10Ni	18Cr - 10Ni	18Cr - 10Ni	As trim No. 2
18	HF	HF	19Cr - 29Ni	19Cr - 29Ni	19Cr - 29Ni	As trim No. 13

NOTES:

- 1) The base materials of disc, wedge and seat ring shall be, at least, equal in corrosion resistance to that of the body material. (Acc. to API Standard 600)
- 2) Stem shall be wrought material.
Cr = chromium; Ni = nickel; Co = cobalt; Mo = molybdenum. Ni-Cu alloy = Monel
HF = Hard Facing using CoCr (commercial name Stellite®) welding wire or electrode AWS a 5.13 "E-Co-Cr-A" hb >= 350; thickness 1.6 mm
NiCr welding alloy. The suffix A applies to NiCr (5A..8A..)

CHEMICAL COMPOSITION AND MECHANICAL PROPERTIES OF OTHER MATERIALS

ASTM	chemical composition %													mechanical properties		
	Ni	Cu	Fe	Mo	Mn	C	Cr	Si	S	Ti	W	Co	Al	Mpa		%
designation														R	S	Ap.
Hastelloy B ®	61	--	5	28	--	0,05	1	--	--	--	--	2,5	--	588-902	343-392	15 - 50
Hastelloy C ®	54	--	6	16	--	0,08	15,1	--	--	--	4	2,5	--	549-892	353-471	10 - 49
Monel 8 400 ®	63 - 68	remaining	3,0	--	0,5 - 1,5	0,12	--	3,5 - 4,0	0,05	--	--	--	--	618-696	--	--
Monel K 500 ®	63 - 70	27 - 33	2,0	--	1,5	0,25	--	1,0	0,01	--	--	--	2,0 - 4,0	892-1049	559-755	30 - 20
Stellite N. 6 ®	--	--	--	--	0,25	1,40	29	1,20	--	--	8	60	--	--	--	--
Inconel 625 ®	min. 58	--	max. 5,0	8,0 - 10,0	max. 0,5	max. 0,1	22,0 - 23,0	max. 0,5	max. 0,015	max. 0,4		max. 1,0	max. 0,4	896	483	50

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

MATERIALS		WCB(a)	WCC(a) LCC(b) LC2(b) LC3(b)	LCB(b)	WC1(h) LC1(b)	WC4(j) WC5	WC6(m)	WC9(m)	C5	C12	CF3(e) CF8(g)	CF8M(g) CF3M(f)	CF8C(g)
CLASS	TEMPERATURE °C	Working pressure (bars)											
150 (PN 20)	- 29 to 38	19,6	20,0	18,4	18,4	20,0	20,0	20,0	20,0	20,0	19,0	19,0	19,0
	50	19,2	19,2	18,1	18,3	19,3	19,2	19,2	19,2	19,2	18,4	18,4	18,5
	100	17,7	17,7	17,3	17,7	17,7	17,7	17,7	17,7	17,7	15,7	16,2	16,7
	150	15,8	15,8	15,8	15,8	15,8	15,8	15,8	15,8	15,8	13,9	14,8	15,5
	200	14,0	14,0	14,0	14,0	14,0	14,0	14,0	14,0	14,0	12,6	13,7	14,0
	250	12,1	12,1	12,1	12,1	12,1	12,1	12,1	12,1	12,1	11,7	12,1	12,1
	300	10,2	10,2	10,2	10,2	10,2	10,2	10,2	10,2	10,1	10,2	10,2	10,2
	350	8,4	8,4	8,4	8,4	8,4	8,4	8,4	8,4	8,4	8,4	8,4	8,4
	400	6,5			6,5		6,5	6,5	6,5	6,5	6,5	6,5	6,5
	425	5,6			5,6		5,6	5,6	5,6	5,6	5,6	5,6	5,6
	450	4,7			4,7		4,7	4,7	4,7	4,7	4,7	4,7	4,7
	500	2,8			2,8		2,8	2,8	2,8	2,8	2,8	2,8	2,8
	525	1,9			1,9		1,9	1,9	1,9	1,9	1,9	1,9	1,9
	540												
	600												
	650												
	700												
	750												
	800												
	SHELL TEST	29,4	30,0	27,6	27,6	30,0	30,0	30,0	30,0	30,0	28,5	28,5	28,5
	SEAT TEST	21,6	22,0	20,2	20,2	22,0	22,0	22,0	22,0	22,0	20,9	20,9	20,9
300 (PN 50)	- 29 to 38	51,1	51,7	47,9	47,9	51,7	51,7	51,7	51,7	51,7	49,6	49,6	49,6
	50	50,1	51,7	47,3	47,6	51,7	51,1	51,2	51,7	51,7	47,8	48,1	48,4
	100	46,4	51,5	45,1	46,6	51,5	48,8	49,0	51,5	51,5	40,9	42,2	43,5
	150	45,2	50,2	44,0	45,0	50,2	46,4	46,6	50,2	50,2	36,3	38,5	40,5
	200	43,8	48,8	42,7	44,2	48,8	45,5	44,8	48,8	48,8	32,8	35,7	38,4
	250	41,7	46,3	40,6	43,1	46,3	44,5	44,2	46,3	46,3	30,5	33,4	36,2
	300	38,7	42,4	37,7	42,0	42,4	42,4	42,4	42,4	42,4	29,1	31,6	34,4
	350	37,0	40,2	36,0	40,2	40,2	40,2	40,2	40,2	40,2	28,1	30,4	32,9
	400	34,5	34,5		36,6	36,6	36,6	36,6	36,6	36,6	27,7	29,1	31,8
	425	28,8	28,8		35,1	35,1	35,1	35,1	34,5	35,1	27,2	28,7	31,5
	450	20,0	20,0		33,8	33,8	33,8	33,8	30,9	33,8	26,9	28,1	30,8
	500	8,8	8,8		24,1	27,1	27,8	27,8	20,3	27,5	26,1	26,8	27,8
	525	5,2	5,2		15,0	18,8	23,0	21,9	15,4	22,6	23,9	26,3	25,8
	540				10,7	13,9	12,8	16,4	11,7	17,0	21,8	25,0	25,0
	600						5,9	7,6	6,5	7,2	16,7	21,4	21,4
	650								3,0	3,5	10,5	14,1	11,6
	700										6,0	9,9	6,7
	750										3,7	5,9	4,0
	800										2,1	3,5	2,6
	SHELL TEST	76,7	77,6	71,9	71,9	77,6	77,6	77,6	77,6	77,6	74,4	74,4	74,4
	SEAT TEST	56,2	56,9	52,7	52,7	56,9	56,9	56,9	56,9	56,9	54,6	54,6	54,6
600 (PN 100)	- 29 to 38	102,1	103,4	95,7	95,8	103,4	103,4	103,4	103,4	103,4	99,2	99,3	99,3
	50	100,2	103,4	94,6	95,3	103,4	102,3	102,4	103,4	103,4	95,7	96,3	96,8
	100	92,8	103,1	90,2	93,2	103,1	97,5	98,1	103,1	103,1	81,8	84,4	86,9
	150	90,5	100,4	87,9	89,8	100,4	92,7	93,3	100,4	100,4	72,7	77,0	81,0
	200	87,6	97,6	85,4	88,4	97,6	91,0	89,7	97,6	97,6	65,5	71,3	76,8
	250	83,4	92,7	81,2	86,2	92,7	88,9	88,4	92,7	92,7	61,1	66,8	72,4
	300	77,5	84,9	75,4	84,1	84,9	84,9	84,9	84,9	84,9	58,1	63,3	68,9
	350	73,9	80,5	71,9	80,5	80,5	80,5	80,5	80,5	80,5	56,1	60,8	65,8
	400	69,0	69,0		73,2	73,2	73,2	73,2	73,2	73,2	54,9	58,2	63,5
	425	57,5	57,5		70,2	70,2	70,2	70,2	69,0	70,2	54,3	57,3	62,9
	450	40,1	40,1		67,6	67,6	67,6	67,6	61,8	67,6	53,7	56,2	61,5
	500	17,6	17,6		48,1	54,1	55,6	55,6	40,5	55,0	52,1	53,7	55,6
	525	10,4	10,4		30,1	37,6	40,5	43,8	30,8	45,2	47,8	52,6	51,6
	540	6,5	6,5		21,4	27,9	25,5	32,7	23,4	34,0	43,6	49,9	49,9
	600						11,8	15,3	13,1	14,4	33,4	42,9	42,9
	650						4,6	7,3	6,0	7,0	21,0	28,2	23,2
	700										12,0	19,9	13,5
	750										7,3	11,0	8,0
	800										4,1	7,0	5,2
	SHELL TEST	153,2	155,1	143,6	143,7	155,1	155,1	155,1	155,1	155,1	148,8	149,0	149,0
	SEAT TEST	112,3	113,7	105,3	105,4	113,7	113,7	113,7	113,7	113,7	109,1	109,2	109,2

NOTES

- (a) Permissible, but not recommended for prolonged usage above 427 °C (800 °F)
 (b) Not to be used over 343 °C (650 °F)
 (c) Permissible, but not recommended for prolonged usage above 454 °C (850 °F)
 (d) Permissible, but not recommended for prolonged usage above 593 °C (1100 °F)
 (e) Not to be used over 427 °C (800 °F)

- (f) Not to be used over 454 °C (850 °F)
 (g) At temperature over 538 °C (1000 °F), use only when carbon content is 0,04 or higher
 (h) Permissible, but not recommended for prolonged usage above 468 °C (875 °F)
 (i) Not to be used over 538 °C (1000 °F)
 (m) Not to be used over 593 °C (1100 °F)

All data, subject to technical changes, are only for information and not for official use.

PRESSURE-TEMPERATURE RATINGS

ASME B16.34

VALVOSIDER
MANUFACTURER OF VALVES

MATERIALS		WCB(a)	WCC(a) LCC(b) LC2(b) LC3(b)	LCB(b)	WC1(h) LC1(b)	WC4(j) WC5	WC6(m)	WC9(m)	C5	C12	CF3(e) CF8(g)	CF8M(g) CF3M(f)	CF8C(g)
CLASS	TEMPERATURE °C	Working pressure (bars)											
900 (PN 150)	- 29 to 38	153,2	155,2	143,6	143,6	155,2	155,1	155,1	155,2	155,2	148,9	148,9	148,9
	50	150,2	155,2	141,9	142,9	155,2	153,4	153,6	155,2	155,2	143,5	144,4	144,4
	100	139,1	154,6	135,3	139,8	154,6	146,3	147,1	154,6	154,6	122,6	126,6	130,4
	150	135,7	150,6	131,9	134,9	150,6	139,1	139,9	150,6	150,6	109,0	115,5	121,5
	200	131,5	146,4	128,0	132,6	146,4	136,4	134,5	146,4	146,4	98,3	107,0	115,3
	250	125,2	139,0	121,8	129,2	139,0	133,4	132,7	139,0	139,0	91,6	100,2	108,6
	300	116,2	127,3	113,1	126,1	127,3	127,3	127,3	127,3	127,3	87,2	94,9	103,3
	350	110,9	120,7	107,9	120,7	120,7	120,7	120,7	120,7	120,7	84,2	91,3	98,7
	400	103,5	103,5		109,8	109,8	109,8	109,8	109,8	109,8	82,4	87,3	95,3
	425	86,3	86,3		105,3	105,3	105,3	105,3	105,3	105,3	81,5	86,0	94,4
	450	60,1	60,1		101,4	101,4	101,4	101,4	92,7	101,4	80,6	84,2	92,3
	500	26,4	26,4		72,2	81,2	83,4	83,4	60,8	82,5	78,2	80,5	83,4
	525	15,5	15,5		45,1	56,4	60,8	65,8	46,3	67,8	71,6	78,9	77,4
	540	9,8	9,8		32,1	41,8	38,3	49,1	35	50,9	65,4	74,9	74,9
	600						17,6	22,9	19,6	21,5	50,1	64,3	64,3
	650						7,0	11,0	9,0	10,4	31,6	42,4	34,7
	700										17,9	29,8	20,2
	750										11,0	17,6	12,1
	800										6,2	10,5	7,5
	SHELL TEST	229,8	232,8	215,4	215,4	232,8	232,7	232,7	232,8	232,8	223,4	223,4	223,4
	SEAT TEST	168,5	170,7	158,0	158,0	170,7	170,6	170,6	170,7	170,7	163,8	163,8	163,8
1500 (PN 250)	- 29 to 38	255,3	258,6	239,4	239,4	258,6	258,6	258,6	258,6	258,6	248,1	248,1	248,2
	50	250,4	258,6	236,5	238,2	258,6	255,7	256	258,6	258,6	239,2	240,6	241,9
	100	231,9	257,7	225,5	233,0	257,7	243,8	242,2	257,7	257,7	204,4	211,0	217,3
	150	226,1	251,0	219,8	224,8	251,0	231,9	233,2	251,0	251,0	181,7	192,5	202,5
	200	219,1	243,9	213,4	221,0	243,9	227,4	224,2	243,9	243,9	163,8	178,4	192,1
	250	208,6	231,7	202,9	215,4	231,7	222,3	221,1	231,7	231,7	152,7	166,9	181,0
	300	193,7	212,1	188,5	210,1	212,1	212,1	212,1	212,1	212,1	145,3	158,1	172,2
	350	184,8	201,2	179,8	201,1	201,2	201,2	201,2	201,2	201,2	140,3	152,1	164,5
	400	172,5	172,5		182,9	182,9	182,9	182,9	182,9	182,9	137,3	145,6	158,8
	425	143,8	100,2		175,5	175,5	175,5	175,5	172,5	175,5	135,8	143,3	157,3
	450	100,2	100,2		169,0	169,0	169,0	169,0	154,5	169,9	134,3	140,4	153,8
	500	44,0	44,0		120,3	135,3	139,0	139,0	101,3	137,5	130,3	134,1	139,0
	525	16,3	25,9		75,2	94,0	101,3	109,6	77,1	113	119,4	131,5	129,0
	540	16,3	16,3		53,5	69,7	63,8	81,8	58,4	84,9	109,1	124,8	124,8
	600						29,4	38,2	32,6	35,9	83,6	107,2	107,2
	650						11,6	18,3	15,0	17,4	52,6	70,6	57,9
	700										29,9	49,7	33,7
	750										18,3	29,4	20,1
	800										10,3	17,5	13,1
	SHELL TEST	383,0	387,9	359,1	359,1	387,9	387,9	387,9	387,9	387,9	372,2	372,2	372,3
	SEAT TEST	280,8	284,5	263,3	263,3	284,5	284,5	284,5	284,5	284,5	272,9	272,9	273,0
2500 (PN 420)	- 29 to 38	425,5	431,0	398,9	399,0	431,0	431,0	431,0	431,0	431,0	413,5	413,6	413,6
	50	417,3	431,0	393,7	397,1	431,0	426,2	426,7	430,9	430,9	398,6	401,0	403,2
	100	386,5	429,5	388,3	429,5	429,5	406,4	109,7	429,5	429,5	340,7	351,7	362,2
	150	376,9	419,3	366,3	374,6	418,3	386,4	388,6	418,3	418,3	302,8	320,9	337,5
	200	365,2	406,6	355,6	368,3	406,6	379,0	373,7	406,6	406,6	273,0	297,3	320,2
	250	347,7	386,1	338,2	359,0	386,1	370,6	368,5	386,1	386,1	254,5	278,2	301,7
	300	322,8	353,5	314,2	350,2	353,5	353,5	353,5	353,5	353,5	242,1	263,6	287,0
	350	308,0	335,3	299,7	335,2	335,3	335,3	335,3	335,3	335,3	233,8	253,8	274,2
	400	287,5	287,5		304,9	304,9	304,9	304,9	304,9	304,9	228,9	242,6	264,7
	425	239,6	239,6		292,5	292,5	292,5	292,5	287,5	292,5	226,4	238,9	262,2
	450	166,9	166,9		281,7	281,7	281,7	281,7	257,6	281,7	223,9	234,0	256,3
	500	73,3	73,3		200,6	225,4	231,6	231,6	168,9	229,1	217,2	223,6	231,6
	525	43,2	43,2		125,4	156,6	168,9	182,7	128,5	188,3	199,0	214,9	214,9
	540	27,2	27,2		89,2	116,1	106,4	136,4	97,3	141,5	181,8	208,0	208,0
	600						49,0	63,6	54,4	59,8	139,3	178,6	178,6
	650						19,3	30,4	25,1	29,0	87,6	117,1	96,5
	700										49,8	82,9	56,1
	750										30,4	49,0	33,5
	800										17,1	29,2	21,9
	SHELL TEST	638,3	646,5	598,4	598,5	646,5	646,5	646,5	646,5	646,5	620,3	620,4	620,4
	SEAT TEST	468,1	474,1	438,8	438,1	474,1	474,1	474,1	474,1	474,1	454,9	455,0	455,0


NOTES

- (a) Permissible, but not recommended for prolonged usage above 427 °C (800 °F)
 (b) Not to be used over 343 °C (650 °F)
 (c) Permissible, but not recommended for prolonged usage above 454 °C (850 °F)
 (d) Permissible, but not recommended for prolonged usage above 593 °C (1100 °F)
 (e) Not to be used over 427 °C (800 °F)

- (f) Not to be used over 454 °C (850 °F)
 (g) At temperature over 538 °C (1000 °F), use only when carbon content is 0,04 or higher
 (h) Permissible, but not recommended for prolonged usage above 468 °C (875 °F)
 (i) Not to be used over 538 °C (1000 °F)
 (m) Not to be used over 593 °C (1100 °F)

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
 Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

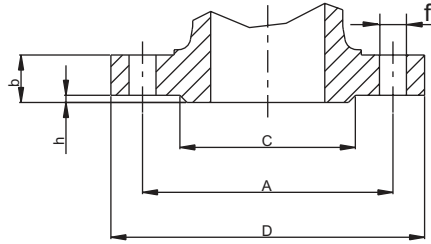

DN = Nominal pipe size
D = Outside diameter of flange
b = Thickness of flange min.
C = Diameter of hub
h = Height of raised face
N = Number of bolt holes
f = Diameter of bolt holes
A = Diameter of bolt circle

PN	DN	D	b	C	h	N°	f	A		PN	DN	D	b	C	h	N°	f	A
6	10	75	12	35	2	4	11	50		6	100	210	16	148	3	4	18	170
10-16	10	90	14	40	2	4	14	60		10-16	100	220	20	158	3	8	18	180
25-40	10	90	16	40	2	4	14	60		25-40	100	235	24	162	3	8	22	190
64-100	10	100	20	40	2	4	14	70		64	100	250	30	162	3	8	26	200
160	10	100	20	40	2	4	15	70		160	100	265	40	162	3	8	30	210
250	10	125	24	40	2	4	18	85		250	100	300	54	162	3	8	34	235
6	15	80	12	40	2	4	11	55		100	125	265	36	162	3	8	30	210
10-16	15	95	14	45	2	4	14	65		6	125	240	18	178	3	8	18	200
25-40	15	95	16	45	2	4	14	65		10-16	125	250	22	188	3	8	18	210
64-100	15	105	20	45	2	4	14	75		25-40	125	270	26	188	3	8	26	220
160	15	105	20	45	2	4	15	75		64	125	295	34	188	3	8	30	240
250	15	130	26	45	2	4	18,5	90		100	125	315	40	188	3	8	33	250
6	20	90	14	50	2	4	11	65		160	125	315	44	188	3	8	33	250
10-16	20	105	16	58	2	4	14	75		250	125	340	60	188	3	12	41	275
25-40	20	105	18	58	2	4	14	75		6	150	265	18	202	3	8	18	225
64-100	20	130	24	58	2	4	18	90		10-16	150	285	22	212	3	8	22	240
6	25	100	14	60	2	4	11	75		25-40	150	300	28	218	3	8	26	250
10-16	25	115	16	68	2	4	14	85		64	150	345	36	218	3	8	33	280
25-40	25	115	18	68	2	4	14	85		100	150	355	44	218	3	12	33	290
64-100	25	140	24	68	2	4	18	100		160	150	355	50	218	3	12	33	290
160	25	140	24	68	2	4	18	100		250	150	390	68	218	3	12	48	320
250	25	150	28	68	2	4	19	105		6	175	295	20	232	3	8	18	255
6	32	120	14	70	2	4	14	90		10-16	175	315	24	242	3	8	22	270
10-16	32	140	16	78	2	4	18	100		25	175	330	28	248	3	12	26	280
25-40	32	140	18	78	2	4	18	100		40	175	350	32	260	3	12	30	295
64-100	32	155	24	78	2	4	22	110		64	175	375	40	260	3	12	33	310
6	40	130	14	80	3	4	14	100		100	175	385	48	260	3	12	33	320
10-16	40	150	16	88	3	4	18	110		160	175	390	54	260	3	12	36	320
25-40	40	150	18	88	3	4	18	110		250	175	430	74	260	3	12	50	355
64-100	40	170	26	85	3	4	22	125		6	200	320	20	258	3	8	18	280
160	40	170	28	88	3	4	22	125		10	200	340	24	268	3	8	22	295
250	40	185	34	88	3	4	25	135		16	200	340	24	268	3	12	22	295
6	50	140	14	90	3	4	14	110		25	200	360	30	278	3	12	26	310
10-16	50	165	18	102	3	4	18	125		40	200	375	34	285	3	12	30	320
25-40	50	165	20	102	3	4	18	125		64	200	415	42	285	3	12	36	345
64	50	180	26	102	3	4	22	135		100	200	430	52	285	3	12	36	360
100	50	195	28	102	3	4	26	145		160	200	430	60	285	3	12	36	360
160	50	195	30	102	3	4	26	145		250	200	485	82	285	3	12	57	400
250	50	200	38	102	3	5	26	150		6	250	375	22	312	3	12	18	335
6	65	160	14	110	3	4	14	130		10	250	395	26	320	3	12	22	350
10-16	65	185	18	122	3	4	18	145		16	250	405	26	320	3	12	26	355
25-40	65	185	22	122	3	8	18	145		25	250	425	32	335	3	12	30	370
64	65	205	26	120	3	8	22	160		40	250	450	38	345	3	12	33	385
100	65	220	30	120	3	8	26	170		64	250	470	46	345	3	12	36	400
160	65	220	34	122	3	8	26	180		100	250	505	60	345	3	12	39	430
250	65	230	42	122	3	8	30	180		160	250	515	68	345	3	12	42	430
6	80	190	16	128	3	4	18	150		250	250	585	100	345	3	16	72	490
10	80	200	20	138	3	8	18	160		6	300	440	22	365	4	12	22	395
16	80	200	20	138	3	8	18	160		10	300	445	26	370	4	12	22	400
25-40	80	200	24	138	3	8	18	160		16	300	460	28	378	4	12	26	410
64	80	215	28	138	3	8	22	170		25	300	485	34	390	4	16	30	430
100	80	230	32	138	3	8	24	180		40	300	515	42	410	4	16	33	450
160	80	230	36	138	3	8	40	180		64	300	530	52	410	4	16	36	460
250	80	255	46	138	3	8	31	200		100	300	585	68	410	4	16	42	500
										160	300	585	78	410	4	16	42	500
										250	300	690	120	410	4	16	90	590

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.


VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

DIN FLANGES DIMENSIONS

DN 350 ÷ DN 1200

VALVOSIDER


MANUFACTURER OF VALVES

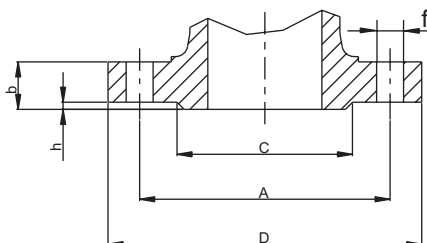


DN = Nominal pipe size
D = Outside diameter of flange
b = Thickness of flange min.
C = Diameter of hub
h = Height of raised face
N = Number of bolt holes
f = Diameter of bolt holes
A = Diameter of bolt circle

PN	DN	D	b	C	h	N°	f	A		PN	DN	D	b	C	h	N°	f	A
6	350	490	22	415	4	12	22	445		6	700	860	24	775	5	24	25	810
10	350	505	26	430	4	16	22	460		10	700	895	30	800	5	24	30	840
16	350	520	30	438	4	16	26	470		16	700	910	42	795	5	24	36	840
25	350	555	38	450	4	16	33	490		25	700	960	50	820	5	24	42	875
40	350	580	46	465	4	16	36	510		40	700	995	64	840	5	24	48	900
64	350	600	56	465	4	16	39	525		64	700	1045	84	840	5	24	56	935
100	350	655	74	465	4	16	48	560		100	700	1145	120	840	5	24	70	1020
6	400	540	22	465	4	16	22	495		6	800	975	24	880	5	24	30	920
10	400	565	26	482	4	16	26	515		10	800	1015	32	905	5	24	33	950
16	400	580	32	490	4	16	30	525		16	800	1025	42	900	5	24	39	950
25	400	620	40	505	4	16	36	550		25	800	1085	64	930	5	24	48	990
40	400	660	50	535	4	16	39	585		40	800	1165	72	960	5	24	62	1050
64	400	670	60	535	4	16	42	585		64	800	1165	92	960	5	24	62	1050
100	400	715	78	535	4	16	48	620		100	800	n.a	n.a	n.a	n.a	n.a	n.a	n.a
6	450	595	22	520	4	16	22	550		6	900	1075	26	980	5	24	30	1020
10	450	615	26	532	4	20	26	565		10	900	1115	34	1005	5	28	33	1050
16	450	640	32	550	4	20	30	585		16	900	1125	44	1000	5	28	39	1050
25	450	670	40	555	4	20	36	600		25	900	1185	68	1030	5	28	48	1090
40	450	685	50	560	4	20	39	610		40	900	1250	78	1070	5	28	56	1140
64	450	715	64	560	4	20	42	630		64	900	1285	98	1070	5	28	62	1170
100	450	770	86	560	4	20	48	675		100	900	n.a	n.a	n.a	n.a	n.a	n.a	n.a
6	500	645	24	570	4	20	22	600		6	1000	1175	26	1080	5	28	30	1120
10	500	670	28	585	4	20	26	620		10	1000	1230	34	1110	5	28	36	1160
16	500	715	36	610	4	20	33	650		16	1000	1255	46	1115	5	28	42	1170
25	500	730	44	615	4	20	36	660		25	1000	1320	62	1140	5	28	56	1210
40	500	755	52	615	4	20	42	670		40	1000	1360	80	1180	5	28	56	1250
64	500	800	68	615	4	20	48	705		64	1000	1415	108	1180	5	28	70	1290
100	500	870	94	615	4	20	56	760		100	1000	n.a	n.a	n.a	n.a	n.a	n.a	n.a
6	600	755	24	670	5	20	26	705		6	1200	1405	28	1295	5	32	33	1340
10	600	780	28	685	5	20	30	725		10	1200	1455	38	1330	5	32	39	1380
16	600	840	40	725	5	20	36	770		16	1200	1485	52	1330	5	32	48	1390
25	600	845	46	720	5	20	39	770		25	1200	1530	70	1350	5	32	56	1420
40	600	890	54	735	5	20	48	795		40	1200	1575	88	1380	5	32	62	1460
64	600	930	76	735	5	20	56	820		64	1200	1665	126	1380	5	32	78	1530
100	600	990	104	735	5	20	62	875		100	1200	n.a	n.a	n.a	n.a	n.a	n.a	n.a

FLANGES - TYPES OF CONTACT SURFACES - DIN 2526



FLANGES WITH RAISED FACE



FLANGES WITHOUT RAISED FACE

Type A - Contact face without stipulation

Type B - Contact face $R_z = 160$, turned (not finer than 40 micron)


Type C - Raised face $R_z = 160$ (not finer than 40 micron), turned

Type D - Raised face $R_z = 40$, turned

Type E - Raised face $R_z = 16$, turned

NOMINAL ROUGHNESS GRADES (R_a)


R_a (μm)	R_z (μm)
1.6	16
3.2	25
6.3	40
12.5	100
25	160



All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

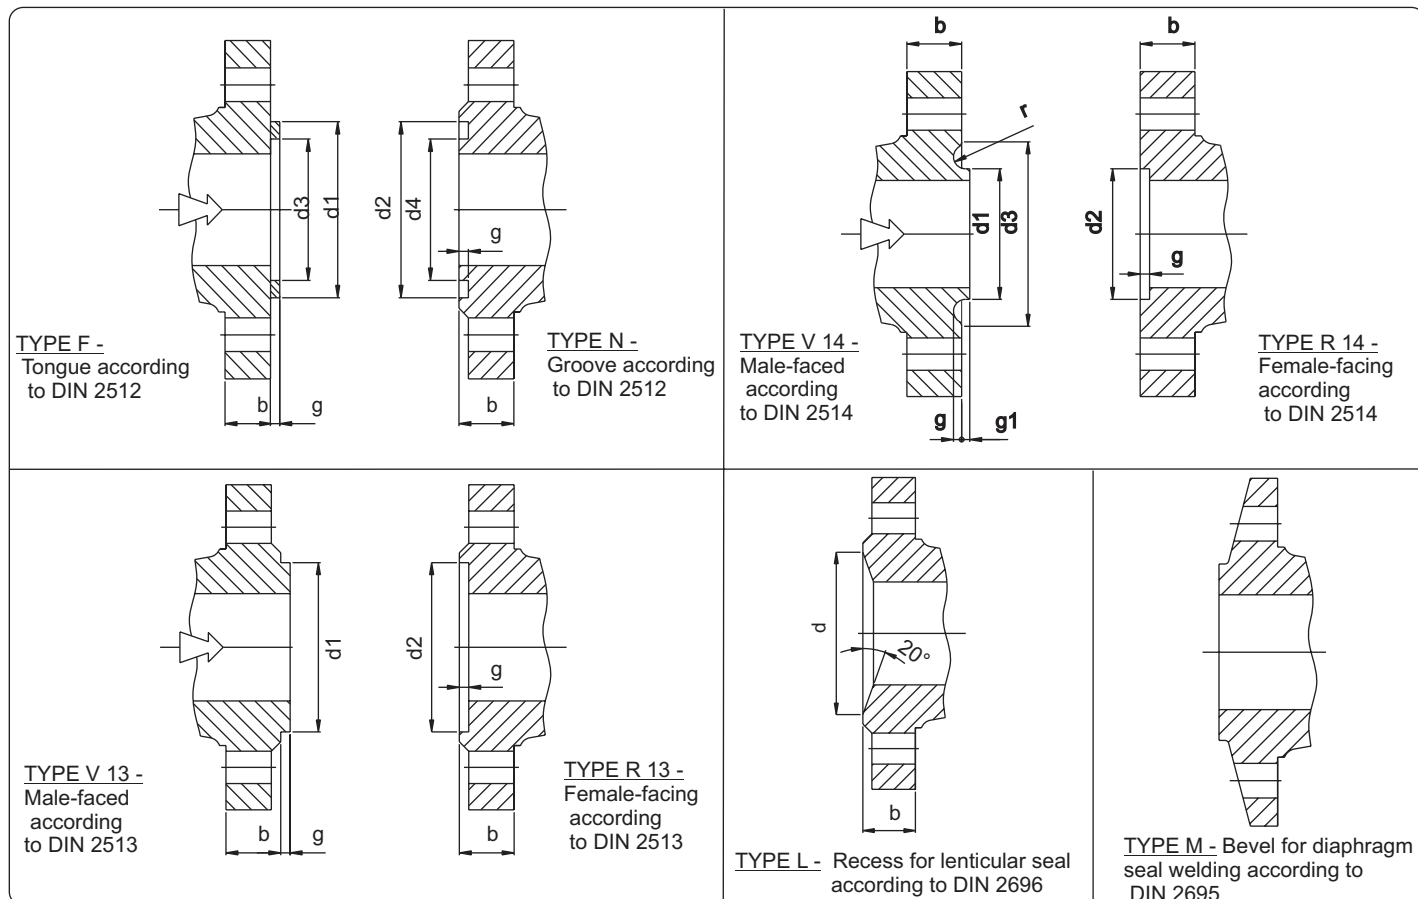

DIMENSIONS OF FACING

DN	DIN 2513					DIN 2512									DN	DIN 2514							LENTICULAR SEAL DIN 2696		DN	
	PN ≤ 6		PN ≥ 10			g	PN ≤ 6				PN ≥ 10					g	PN 10 ÷ 40							PN 64 : 250		
	d ₁	d ₂	d ₁	d ₂	d ₃		d ₁	d ₂	d ₃	d ₄	d ₁	d ₂	d ₃	d ₄			d ₁	d ₂	d ₃	g	g ₁	r	d			
10	30	31	34	35	4	30	31	22	21	34	35	24	23	4	10	-	-	-	-	-	-	18	10			
15	35	36	39	40	4	35	36	27	26	39	40	29	28	4	15	-	-	-	-	-	-	24	15			
20	42	43	50	51	4	42	43	32	31	50	51	36	35	4	20	35	36	51	4	2	2,5	30	20			
25	49	50	57	58	4	49	50	39	38	57	58	43	42	4	25	42	43	58	4	2	2,5	35	25			
32	61	62	65	66	4	61	62	49	48	65	66	51	50	4	32	50	51	66	4	2	2,5	43	32			
40	68	69	75	76	4	68	69	56	55	75	76	61	60	4	40	60	61	76	4	2	2,5	51	40			
50	81	82	87	88	4	81	82	69	68	87	88	73	72	4	50	72	73	88	4	2	2,5	63	50			
65	101	102	109	110	4	101	102	89	88	109	110	95	94	4	65	94	95	110	4	2	2,5	85	65			
80	117	118	120	121	4	117	118	103	102	120	121	106	105	4	80	105	106	121	4	2	2,5	97	80			
100	137	138	149	150	4,5	137	138	123	122	149	150	129	128	4,5	100	128	129	150	4,5	2,5	3	124	100			
125	165	166	175	176	4,5	165	166	149	148	175	176	155	154	4,5	125	154	155	176	4,5	2,5	3	153	125			
150	192	193	203	204	4,5	192	193	176	175	203	204	183	182	4,5	150	182	183	204	4,5	2,5	3	181	150			
175	222	223	233	234	4,5	222	223	206	205	233	234	213	212	4,5	175	212	213	234	4,5	2,5	3	218	175			
200	249	250	259	260	4,5	249	250	231	230	259	260	239	238	4,5	200	238	239	260	4,5	2,5	3	243	200			
250	304	305	312	313	4,5	304	305	286	285	312	313	292	291	4,5	250	291	292	313	4,5	2,5	3	298	250			
300	354	355	363	364	4,5	354	355	336	335	363	364	343	342	4,5	300	342	343	364	4,5	2,5	3	345	300			
350	401	402	421	422	5	401	402	381	380	421	422	395	394	5	350	394	395	422	5	3	3,5	394	350			
400	451	452	473	474	5	451	452	431	430	473	474	447	446	5	400	446	447	474	5	3	3,5	445	400			
450	505	506	523	524	5	505	506	481	480	523	524	497	496	5	450	496	497	524	5	3	3,5		450			
500	555	556	575	576	5	555	556	531	530	575	576	549	548	5	500	548	549	576	5	3	3,5		500			
600	655	656	675	676	5	655	656	631	630	675	676	649	648	5	600	648	649	676	5	3	3,5		600			
700	760	761	777	778	5	760	761	736	735	777	778	751	750	5	700	750	751	778	5	3	3,5		700			
800	865	866	882	883	5	865	866	841	840	882	883	856	855	5	800	855	856	883	5	3	3,5		800			
900	965	966	987	988	5	965	966	941	940	987	988	961	960	5	900	960	961	988	5	3	3,5		900			
1000	1062	1063	1091	1092	6	1062	1063	1036	1035	1091	1092	1061	1060	6	1000	1060	1061	1092	6	3	4		1000			

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

VALVE WELDING ENDS - DIN 3239

Part 1 - Butt ends | Part 2 - Socket ends


VALVOSIDER

MANUFACTURER OF VALVES

Nominal size DN	Butt Welding ends for pipes of							
	series 1 (up to PN 40)	series 2 (PN 63)	series 3 (PN 100)	series 4 (PN 160)	series 5 (PN 250)	series 6 *) (PN 320)	series 7 (PN 400)	series 8 (PN 630)
10	d1	Use series 4 welding ends		20	Use series 6 welding ends		20	24
	d2			18			18	22
	d3			17,2			17,2	21,3
	d _p			13			12	11,5
	s			2,0			2,6	5,0
15	d1	Use series 4 welding ends		24			31	37
	d2			22			28	34
	d3			21,3			26,9	33,7
	d _p			17			17	18,5
	s			2,0			5,0	8,0
20	d1	31	--	--	--	--	--	--
	d2	28	--	--	--	--	--	--
	d3	26,9	--	--	--	--	--	--
	d _p	22	--	--	--	--	--	--
	s	2,3	--	--	--	--	--	--
25	d1	Use series 3 welding ends		37			48	54
	d2			34			44	49
	d3			33,7			42,4	48,3
	d _p			28,5			29	25
	s			2,6			7,1	12,5
40	d1	Use series 3 welding ends		54			67	67
	d2			49			61	77
	d3			48,3			60,3	76,1
	d _p			43			40	43,5
	s			2,6			11,0	17,5
50	d1	Use series 3 welding ends		67			83	96
	d2			61			77	90
	d3			60,3			76,1	88,9
	d _p			54			49,5	51,5
	s			3,2			14,2	20,0
65	d1	Use series 3 welding ends		83			121	--
	d2			77			115	--
	d3			76,1			114,3	--
	d _p			69			81	--
	s			3,6			17,5	--
80	d1	Use series 3 welding ends		96			121	--
	d2			90			115	--
	d3			88,9			114,3	--
	d _p			81			87,5	--
	s			4,0			17,5	--
100	d1	Use series 3 welding ends		121			--	--
	d2			115			--	--
	d3			114,3			--	--
	d _p			104			--	--
	s			5,0			--	--
125	d1	Use series 2 welding ends		147			--	--
	d2			141			--	--
	d3			139,7			--	--
	d _p			130,5			--	--
	s			4,5			--	--
150	d1	Use series 2 welding ends		176			--	--
	d2			170			--	--
	d3			168,3			--	--
	d _p			156,5			--	--
	s			5,6			--	--
200	d1	Use series 2 welding ends		228			--	--
	d2			222			--	--
	d3			219,1			--	--
	d _p			204,5			--	--
	s			7,1			--	--
250	d1			282			--	--
	d2			276			--	--
	d3			273			--	--
	d _p			256,5			--	--
	s			8,8			--	--
300	d1			331			--	--
	d2			325			--	--
	d3			323,9			--	--
	d _p			306,5			--	--
	s			8,0			--	--
350	d1			365			--	--
	d2			359			--	--
	d3			355,6			--	--
	d _p			336,5			--	--
	s			8,8			--	--
400	d1			417			--	--
	d2			411			--	--
	d3			406,4			--	--
	d _p			383			--	--
	s			11			--	--
500	d1			518			--	--
	d2			512			--	--
	d3			508			--	--
	d _p			478			--	--
	s			14,2			--	--

DIN 3239 - Part 1

Type 1

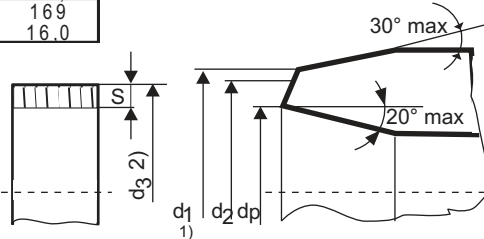

Designation		Chemical composition (cast analysis) (% min.)								
Name	Number	C	Si max	Mn	P max	S max	Cr	Mo	Ni	others
GP240GH	1.0619	0,18 to 0,23	0,60	0,50 to 1,20	0,030	0,020 ¹⁾	--	--	--	--
G20Mo5	1.5419	0,18 to 0,23	0,60	0,50 to 1,00	0,025	0,020 ¹⁾	--	0,40 to 0,60	--	--
G17CrMo5-5	1.7357	0,15 to 0,20	0,60	0,50 to 1,00	0,020	0,020 ¹⁾	1,00 to 1,50	0,45 to 0,65	--	--
G17CrMo9-10	1.7379	0,13 to 0,20	0,60	0,50 to 0,90	0,020	0,020 ¹⁾	2,00 to 2,50	0,90 to 1,20	--	--
GX15CrMo5	1.7365	0,12 to 0,19	0,80	0,50 to 0,80	0,025	0,025	4,00 to 6,00	0,45 to 0,65	--	--
G20Mn5	1.6220	0,17 to 0,23	0,60	1,00 to 1,60	0,020	0,020 ¹⁾	--	--	0,80 max	--
G9Ni10	1.5636	0,06 to 0,12	0,60	0,50 to 0,80	0,020	0,015	--	--	2,00 to 3,00	--
G9Ni14	1.5638	0,06 to 0,12	0,60	0,50 to 0,80	0,020	0,015	--	--	3,00 to 4,00	--
GX5CrNi19-10 2)	1.4308 2)	0,07 max	1,50	1,50	0,040	0,030	18,00 to 20,00	--	8,00 to 11,00	--
GX5CrNiNb19-11 2)	1.4552 2)	0,07 max	1,50	1,50	0,040	0,030	18,00 to 20,00	--	9,00 to 12,00	Nb: 8 x C, max: 1,00
GX5CrNiMo19-11-2 2)	1.4408 2)	0,07 max	1,50	1,50	0,040	0,030	18,00 to 20,00	2,00 to 2,50	9,00 to 12,00	--
GX5CrNiMoNb19-11-2 2)	1.4581 2)	0,07 max	1,50	1,50	0,040	0,030	18,00 to 20,00	2,00 to 2,50	9,00 to 12,00	Nb: 8 x C, max: 1,00
GX2CrNiMoN22-5-3	1.4470	0,03 max	1,00	2,00	0,035	0,025	21,00 to 23,00	2,50 to 3,50	4,50 to 6,50	N: 0,12 to 0,20

1) For castings of ruling thickness <28 mm, % 0,030 S is permitted

2) It should be pointed out that the suggested chemical composition ranges of these alloyed corrosion resistant steel grades are rather large. According to the final destination (high temperature/low temperature, etc...) it may be advisable for the founder to aim for narrower ranges for different elements in order to achieve the most suitable structures.

MECHANICAL PROPERTIES

Designation		Heat treatment °C			Test at room temperature				Test at elevated temperature							
Name	Number	Symbol 2)	Normalizing (+ N) or Quenching (+ Q) 1)	Tempering (+T)	Tensile test			Impact test	Tensile test							
					Rp0,2 Mpa *)	Rm Mpa *)	A % min	KV J min.	Rp0,2 Mpa *) min at °C							
									100°	200°	300°	350°	400°	450°	500°	550°
GP240GH	1.0619	+ N + QT	900 to 980 890 to 980	-- 600 to 700	240 240	420 to 600 420 to 600	22 22	27 40	210 210	175 175	145 145	135 135	130 130	125 125	-- --	-- --
G20Mo5	1.5419	+ QT	920 to 980	650 to 730	245	440 to 590	22	27	--	190	165	155	150	145	135	--
G17CrMo5-5	1.7357	+ QT	920 to 960	680 to 730	315	490 to 690	20	27	--	250	230	215	200	190	175	160
G17CrMo9-10	1.7379	+ QT	930 to 970	680 to 740	400	590 to 740	18	40	--	355	345	330	315	305	280	240
GX15CrMo5	1.7365	+ QT	930 to 990	680 to 730	420	630 to 760	16	27	--	390	380	--	370	--	305	250

1) +Q means quenching media: air or liquid. +T = tempering. +N = normalizing

2) If there are alternative specifications for heat treatment, the requested alternative shall be indicated on the order, e.g.: GP240GH +QT1 or 1.0619 +QT1

*) 1 Mpa = 1N/mm²

Designation		Heat treatment °C		Test at room temperature			Impact test	
Name	Number	Symbol 1)	Quenching	Tempering	Tensile strength		KV J min.	At °C
					R _{p0,2} Mpa *) min	R _m Mpa *)		
G20Mn5	1.6220	+ N	900 to 980	--	300	480 to 620	20	-30
		+ QT	900 to 940	610 to 660	300	500 to 650	22	-40
G9Ni10	1.5636	+ QT	830 to 890	600 to 650	280	480 to 630	24	-70
G9Ni14	1.5638	+ QT	820 to 900	590 to 650	360	500 to 650	20	-90

1) +Q: quenching in water. +T = tempering. +N = normalizing.

*) 1 Mpa = 1 N/mm²

Designation		Heat treatment		Test at room temperature				Test at elevated temperature							
Name	Number	+ AT 1) °C		Tensile test			Impact test	Tensile test							
				R _{p1,0} 5) Mpa *) min	R _m Mpa *)	A % min	KV J min.	R _{p1,0} 5) Mpa *) min. at °C							
							°C 8)	100°	200°	300°	350°	400°	500°	550°	
GX5CrNi19-10	1.4308	1050 to 1150		200	440 to 640	30	60 7)	RT 7)	160	125	110	--	--	--	--
GX5CrNiNb19-11	1.4552	1050 to 1150		200	440 to 640	25	40	RT	165	145	130	--	120	110	100
GX5CrNiMo19-11-2	1.4408	1080 to 1150		210	440 to 640	30	60 7)	RT 7)	170	135	115	--	105	--	--
GX5CrNiMoNb19-11-2	1.4581	1080 to 1150		210	440 to 640	25	40	RT	185	160	145	--	130	120	115
GX2CrNiMoN22-5-3	1.4470	1120 to 1150 2) 3)		420 6)	600 to 800	20	30	RT	330 6)	280 6)	4)	--	--	--	--

1) The heat treatment for all the steel grades is +AT +QW (solution annealing + water quenching).

2) After solution annealing at high temperature, castings may be cooled down to 1040 °C to 1010 °C prior to water quenching in order to improve corrosion resistance and prevent cracks in complex shapes.

3) As far as steel castings for pressure vessel are concerned the austenitic-ferritic steel are not considered in their age hardened condition.

4) For similar reasons as those concerning note 3) the austenitic-ferritic steel have not to be used for temperatures higher than 250 °C in pressure vessel applications.

5) R_{p0,2} may be estimated by lowering R_{p1,0} by 25 Mpa.

6) R_{p0,2}

7) For use at low temperature impact properties may be agreed and the following applies: Steel number 1.4308 KV J min. 60 at -196 °C.

8) RT = Room temperature. *) 1 Mpa = 1 N/mm²

All data, subject to technical changes, are only for information and not for official use.

MATERIALS EQUIVALENCE AND COMPARISON

VALVOSIDER
MANUFACTURER OF VALVES

MATERIALS EQUIVALENCE

ASTM	EN 10213	EN No.	UNS	JIS	TRADE MARK
A48-40B	EN-GJL-250	0.6025			
	EN-GJS-400-18	0.7043			
A216 WCB	GP240GH	1.0619	J03002	SCPH2	
A352 LCB	G20Mn5	1.6220	J03003	SCPL1	
A352 LC2					
A352 LC3	G9Ni14	1.5638	J31550	SCPL31	
A217 WC1	G20Mo5	1.5419	J12524	SCPH11	
A217 WC6	G17CrMo5-5	1.7357	J12072	SCPH21	
A217 WC9	GS12CrMo9-10	1.7379	J21890	SCPH32-CF	
A217 C5	GX15CrMo5	1.7365 (1.7363)	J42045	SCPH61	
A217 C12	(GX12CrMo10-1)	(1.7389)	J82090		
A351 CF3	X2CrNi19-11	1.4306	J92500	SCS19	
A351 CF3M	X2CrNiMo17-12-2	1.4409	J92800	SCS16	
A351 CF8	GX5CrNiMo19-10	1.4308	J92600	SCS13	
A351 CF8C	GX5CrNiNb19-11	1.4552	J92710		
A351 CF8M	GX5CrNiMo19-11-2	1.4408	J92900	SCS14	
A351 CF8MC	GX5CrNiMoNb19-11-2	1.4581			
A351 CG8M					
	GX2CrNiMoN22-5-3	1.4470			
A351 CK3MCuN					
A351 CN7M			N08007	SCS23	
A494 N-12MV			N10001		HASTELLOY B ®
A494 CW-12MW			N10002		HASTELLOY C ®
A494 M35-1			N04400		MONEL 400 ®
A494 CW-6MC			N06625		INCONEL 625 ®
			N08825		INCOLOY 825 ®
			S31803		SAF 2205 ®
			S31254		254 SMO ®
			S32550		FERRALIUM 255 ®

MATERIALS COMPARISON

CASTINGS			FORGINGS		
ASTM	EN 10213	EN No.	ASTM	EN 10213	EN No.
A216 WCB	GP240GH (GS-C 25N)	1.0619	A105	(C22.8)	1.0460
A352 LCB	G20Mn5	1.6220	A352 LF2		1.0437
A352 LC2					
A352 LC3	G9Ni14	1.5638	A352 LF3		1.5637
A217 WC1	G20Mo5	1.5419	A182 F1		1.5415
A217 WC6	G17CrMo5-5	1.7357	A182 F11	14CrMo4-5	1.7335
A217 WC9	GS12CrMo9-10	1.7379	A182 F22		1.7380
A217 C5	GX15CrMo5	1.7365 (1.7363)	A182 F5		1.7362
A217 CA15			A182 F6	(X20Cr13)	1.4021
A217 C12	(GX12CrMo10-1)	(1.7389)	A182 F9	(15CrMo12.1)	1.4920
A351 CF3	X2CrNi19-11	1.4306	A182 F304L	X2CrNi19-11	1.4306
A351 CF3M	X2CrNiMo17-12-2	1.4409	A182 F316L	X2CrNiMo17-12-2	1.4404
A351 CF8	GX5CrNiMo19-10	1.4308	A182 F304	X5CrNi18-10	1.4301
A351 CF8C	GX5CrNiNb19-11	1.4552	A182 F321	X6CrNiTi18-10	1.4541
A351 CF8C	GX5CrNiNb19-11	1.4552	A182 F347	X6CrNiNb18-10	1.4550
A351 CF8M	GX5CrNiMo19-11-2	1.4408	A182 F316	X5CrNiMo17-12-2	1.4401
A351 CF8MC	GX5CrNiMoNb19-11-2	1.4581	A182 F348	X6CrNiMoNb17-12-2	1.4580
A351 CG8M			A182 F317		
A351 CK3MCuN			A182 F44		
A351 CN7M			A182 F20		

BOLTS - ASME MATERIALS

BOLTS		NUTS	
B7	ASTM A193 B7	2H	ASTM A194 Gr.2H
B16	ASTM A193 B16	Gr.4	ASTM A194 Gr.4
L7	ASTM A320 L7	Gr.4	ASTM A194 Gr.4
B8M	ASTM A193 B8M	Gr.8M	ASTM A193 Gr.8M
B8	ASTM A193 B8 CL. 1	Gr.8 A	ASTM A194 Gr.8A
320 B8	ASTM A320 B8 CL.1	Gr.8 A	ASTM A194 Gr.8A
307 B	ASTM A307 Gr.B		
B8	ASTM A193 B8 CL. 1	2H	ASTM A194 Gr.2H

BOLTS - DIN MATERIALS

MATERIALS			BOLTS		NUTS
Y	C35	1.0501	C35		C35
YK	CK35	1.1181	CK35		C35
G	24CrMo5	1.7258	24CrMo5		CK35
GA	21CrMoV57	1.7709	21CrMoV57		24CrMo5
	A2-70		A2-70		A2-70
	A4-70		A4-70		A4-70

All data, subject to technicals changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

RATING FOR GROUP 3E0 MATERIALS - GP240GH - 1.0619					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	15,6	24,4	39,0	61,4	97,4
50	14,9	23,2	37,2	58,6	93,0
100	13,6	21,3	34,1	53,7	85,3
150	12,7	19,8	31,7	49,9	79,2
200	11,4	17,8	28,4	44,8	71,1
250	10,4	16,2	26,0	40,6	65,0
300	9,4	14,7	23,5	37,1	58,9
350	8,8	13,7	21,9	34,5	54,8
375	8,6	13,5	21,6	34,0	54,0
400	8,4	13,2	21,1	33,3	52,8
425					
450					
475					
500					

RATING FOR GROUP 4E0 MATERIALS - G20Mo5 - 1.5419					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	16,0	25,0	40,0	63,0	100,0
50	16,0	25,0	40,0	63,0	100,0
100	16,0	25,0	40,0	62,9	99,9
150	15,1	23,7	37,8	59,6	94,6
200	14,0	21,8	34,9	55,0	87,3
250	13,0	20,3	32,5	51,2	81,2
300	11,0	17,3	27,5	43,5	69,0
350	10,4	16,2	26,0	40,9	6,0
375	10,1	15,7	25,2	39,6	62,9
400	9,7	15,2	24,4	38,4	60,9
425	9,6	15,0	24,0	37,9	60,1
450	9,4	14,7	23,5	37,1	58,9
475	9,3	14,5	23,2	36,6	58,1
500	7,2	11,4	18,0	28,3	44,9

RATING FOR GROUP 5E0 MATERIALS - G17CrMo5-5 - 1.7357					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	16,0	25,0	40,0	63,0	100,0
50	16,0	25,0	40,0	63,0	100,0
100	16,0	25,0	40,0	63,0	100,0
150	15,8	24,8	39,6	62,4	99,0
200	14,9	23,3	37,4	58,8	93,4
250	14,3	22,3	35,7	56,3	89,3
300	13,3	20,8	33,3	52,4	83,2
350	12,3	19,3	30,9	48,6	77,1
375	12,0	18,8	30,0	47,3	75,1
400	11,5	18,0	28,9	45,5	72,2
425	11,1	17,3	27,7	43,6	69,2
450	10,7	16,7	26,7	42,0	66,7
475	10,0	15,6	25,0	39,4	62,5
500	8,9	13,9	22,3	35,1	55,7
510	8,2	12,9	20,6	32,5	51,6
520	6,7	10,4	16,7	26,3	41,8
530	5,5	8,7	13,9	21,8	34,7
550	3,5	5,4	8,7	13,7	21,8

RATING FOR GROUP 6E1 MATERIALS - GX15CrMo5 - 1.7365					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	16,0	25,0	40,8	63,0	100,0
50	16,0	25,0	40,8	63,0	100,0
100	16,0	25,0	40,7	63,0	100,0
150	15,8	24,8	39,6	62,4	99,0
200	15,4	24,1	38,5	60,6	96,3
250	14,6	22,9	36,6	57,6	91,4
300	13,5	21,1	33,8	53,3	84,6
350	12,7	19,8	31,8	50,0	79,4
375	12,3	19,1	30,6	48,2	76,6
400	11,5	18,0	28,9	45,5	72,2
425	11,1	17,3	27,7	43,6	69,2
450	10,7	16,7	26,7	42,0	66,7
475	10,0	15,6	25,0	39,4	62,5
500	8,0	12,6	20,1	31,6	50,2
510					
520					
530					
550					

RATING FOR GROUP 12E0 MATERIALS - GX5CrNiNb 19-11 - 1.4552					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	14,2	22,2	35,6	56,0	88,9
50	13,5	21,1	33,8	53,2	84,4
100	12,5	19,6	31,3	49,3	78,2
150	11,7	18,3	29,3	46,2	73,3
200	11,0	17,2	27,6	43,4	68,9
250	10,3	16,1	25,8	40,6	64,4
300	9,7	15,1	24,2	38,1	60,4
350	9,2	14,4	23,1	36,4	57,8
375	9,1	14,2	22,8	35,8	56,9
400	8,9	13,9	22,2	35,0	55,6
425	8,8	13,8	22,0	34,7	55,1
450	8,7	13,6	21,7	34,2	54,2
475	8,6	13,4	21,5	33,9	53,8
500	8,5	13,2	21,2	33,3	52,9
525	7,6	11,9	19,0	29,9	47,5
550	7,5	11,7	18,7	29,4	46,7
575	7,3	11,5	18,4	28,9	45,9
600	6,1	9,6	15,3	24,1	38,2

RATING FOR GROUP 15E0 MATERIALS - GX5CrNiMoNb 19-11-2 - 1.4581					
TEMP. °C	GAUGE WORKING PRESSURE IN BAR				
	PN 16	PN 25	PN 40	PN 63	PN 100
RT	14,9	23,3	37,3	58,8	93,3
50	14,6	22,8	36,4	57,4	91,1
100	13,5	21,1	33,8	53,2	84,4
150	12,5	19,6	31,3	49,3	78,2
200	11,7	18,3	29,3	46,2	73,3
250	11,0	17,2	27,6	43,4	68,9
300	10,3	16,1	25,8	40,6	64,4
350	10,0	15,6	24,9	39,2	62,2
375	9,8	15,3	24,5	38,6	61,3
400	9,6	15,0	24,0	37,8	60,0
425	9,5	14,9	23,8	37,5	59,6
450	9,5	14,8	23,6	37,2	59,1
475	9,4	14,7	23,5	37,0	58,7
500	8,9	13,9	22,3	35,1	55,7
525	8,1	12,7	20,4	32,1	50,9
550	7,9	12,3	19,7	31,0	49,2
575	7,6	11,8	18,9	29,8	47,2
600	6,8	10,6	16,9	26,6	42,3

* prEN 12516-1 is a draft and must not be regarded or used as International Standard. All data, subject to technical changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

FLOW COEFFICIENT, K_v

may be defined as the rate of flow of water in cubic metres per hour, that will generate a pressure drop of one bar across the valve.

FLOW COEFFICIENT, C_v

may be defined as the rate of flow of water in US gallons per minute, at 60 °F (15,6 °C), that will generate a pressure drop of one pound-force per square inch across the valve.

BASIC FORMULAS

Liquid flow:

$$K_v = \frac{Q\sqrt{G}}{\sqrt{(P)}} ; P = G \frac{Q^2}{K_v^2}$$

where

Q = flow rate in cubic metres per hour;
G = specific gravity of liquid (water = 1);
P = pressure drop across valve in bar.

$$C_v = \frac{Q\sqrt{G}}{\sqrt{(P)}} ; P = G \frac{Q^2}{C_v^2}$$

where

Q = flow rate in US gal/min;
G = specific gravity of liquid (water = 1);
P = pressure drop across valve in lbf/in²

Gases flow :

$$P = P_1 \sqrt{P_1^2 - 2S_G T \frac{W_G}{1360 \frac{K_v}{0.86}}}$$

where

P₁ = inlet pressure (PSIA);
S_G = specific gravity of gas at standard conditions (air = 1);
T = absolute temperature of gas (-460 °F)
W_G = Volumetric flow of gas

Steam flow:

$$P = P_1 \sqrt{P_1^2 - \frac{1}{2.1} \frac{0.0007 T_s}{\frac{K_v}{0.86}} W^2}$$

where

W = pound per hour of Steam;
T_s = degree of superheat (°F);
P₁ = inlet pressure
P = pressure drop across valve in lbf/in²

Each type and size of valve has a particular flow coefficient and the general formulas indicate how a knowledge of this can be used to establish the pressure drop across a valve for a given flow rate or, alternatively, to determinate the flow rate through a valve which will generate a given pressure drop.

Flow coefficient values are determined by testing and may not be valid for all conditions of flow.

CAST STEEL VALVES - FLOW COEFFICIENT K_v (m³/h) (C_v (US gal/minute) = $K_v/0.86$)

Type	Class	Nominal dimension											
		2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
GATE VALVES	150	204	510	893	2074	3808	6035	8840	12325	16320	20825	23290	37060
	300	204	510	893	2074	3808	6035	8840	11339	15014	19159	21427	34095
	600	204	510	893	2074	3808	6035	10880	13065	17145	22330	27319	39704
	900	188	469	821	1908	3504	5552	10010	12019	15773	20543	25134	36527
	1500	173	432	756	1755	3223	5108	9209	11058	14511	18900	23123	33605
	2500	159	432	756	1755	3223	5108	9209	11058	--	--	--	--
GLOBE VALVES	150	38	102	174	400	740	1190	1700	2380	3188	4080	5015	7225
	300	38	102	174	400	740	1190	1700	2380	3188	3754	4614	6647
	600	35	86	149	352	633	985	1415	2190	2268	--	--	--
	900	32	79	137	324	582	906	1302	2015	2087	--	--	--
	1500	30	73	126	298	536	834	1198	1853	1920	--	--	--
	2500	27	67	116	275	493	768	1102	1705	1766	--	--	--
SWING CHECK VALVES F.B.	150	80	204	349	799	1479	2380	3400	4760	6375	8160	9350	14875
	300	77	198	338	775	1435	2309	3298	4617	6184	7915	9070	14429
	600	73	188	321	736	1363	2193	3133	4386	5874	7519	8616	13707
	900	70	179	305	700	1295	2083	2977	4167	5580	7143	8186	--
	1500	66	170	290	665	1231	1979	2828	3958	5301	6786	7777	--
	2500	63	162	275	632	1170	1880	2687	3760	5036	6447	7388	--
STRAINERS	150	56	127	200	494	675	944	1378	1916	2874	4311	6467	9700
	300	56	127	200	494	675	944	1378	1916	2874	4311	6467	9700
	600	49	111	176	434	594	830	1213	1686	2529	3794	5691	8536
	900	48	109	172	426	582	814	1188	1652	2479	3718	5577	8365
	1500	47	107	169	417	570	797	1165	1619	2429	3643	5466	8198
	2500	46	105	165	409	559	781	1141	1587	2380	3571	5356	8034

All data, subject to technical changes, are only for information and not for official use.

CONVERSION TABLES

	Multiply →	by	→ to obtain		Multiply →	by	→ to obtain
Length	mil	25,4	μ (micron)	Velocity	ft/s (foot per second)	3,281	m/s (metre per second)
	in (inch)	25,4	mm		m/min (metre per minute)	60	m/s (metre per second)
	ft (foot)	0,3048	m		ft/min (foot per minute)	196,85	m/s (metre per second)
	yd (yard)	0,9144	m		mile/h (mile per hour)	1,6093	km/h (kilometre per hour)
	miles (nautical)	1,853	km		m/s (metre per second)	3,6	km/h (kilometre per hour)
	miles (statute)	1,609	km	Dynamic viscosity	g/ (cm s) (Poise)	0,1	Pa s = kg / (m s)
Area	sq.in. (square inch)	6,4516	cm ²	viscosity	centipoise	0,001	Pa s
	sq.ft. (square foot)	0,0929	cm ²		lb/ (ft s)	1,48819	Pa s
	sq.yd. (square yard)	0,8361	cm ²	Kinematic viscosity	cm ² (Stokes)	0,0001	m ² /s
Volume	cu.in (cubic inch)	16,387	cm ³	viscosity	centistokes	0,000001	m ² /s
	cu.ft. (cubic foot)	28,317	dm ³		ft ² / s	0,09290	m ² /s
	UK gal (UK gallon)	4,5461	dm ³	Moment of force	N m (newton metre)	0,001	kN m (kilonewton metre)
	US gal (US gallon)	3,7854	dm ³		kN m	101,972	kgf m (kilogram-force metre)
	bushel	35,24	dm ³		kgf m	86,8	lbf in (Pound-force inch)
	US gal (US gallon)	42	Us barrel		lbf ft (Pound-force foot)	12	lbf in (Pound-force inch)
	UK pint	1,76	l (litre)	Mass per unit length	lbf ft (Pound-force foot)	1,356	N m (newton metre)
	l (litre)	1000	cm ³		kg/m	0,672	lb/ft
	l (litre)	1	dm ³		lb/ft	1,488	kg/m
	m3 (cubic metre)	1000	l (litre)	Mass per unit area	kg/m ²	0,2048	lb/ft ²
Mass	grains	0,0648	g	Thermal conductivity	lb/ft ²	4,882	kg/m ²
	lb (pound)	0,4536	kg		W/(m °C)	6,934	Btu in/(ft ² h °F)
	oz (ounce)	28,3495	g	Enthalpy	Btu in/ft ² °F	0,1442	W/(m °C)
	ton (UK ton)	1016,05	kg		Btu (British Thermal Unit)	1055	J (Joule)
	sh ton (US ton)	907,2	kg	Power	Btu	0,252	kcal = Cal
	t (tonne)	1000	kg		J	0,73560	ft lb
Pressure and Stress	kgf/cm ² = ate	0,980556	bar		kWh	3600	kJ
	Pa (Pascal) = N/m ²	0,00001	bar	Energy	Btu	0,252	kcal = Cal
	MPa (Megapascal)	10	bar		kcal	4186,8	J
	mm H ₂ O	9,80665	Pa		kJ/kg	0,239	kcal/kg
	Torr (mm Hg)	133,322	Pa		kW	1,34102	hp
	psi (lbs per square inch)	0,068941	bar	Calorific value (volume basis)	hp	746	watt
Density	UK tonf/in ²	15,44	Mpa		MJ/m ³	26,84	Btu/ft ³
	lb/in ³	27,680	g/cm ³		Btu/ft ³	0,03726	MJ/m ³
	lb/ft ³	0,01602	g/cm ³	Force	Btu/ft ³	37,26	kJ/m ³
	g/cm ³	1000	litre - g/dm ³		N (Newton)	0,102	kgf = kp (unità in disuso)
	kg/m ³	0,752	ton/yd ³		lbf (pound-force)	4,4483	N
	ton/yd ³	13,319	lb/Ukgal		kgf = kp	2,205	lbf
to obtain ←				to obtain ←			
by				by			
→ add				→ to obtain			
psig (psi at gauge)				psia (psi absolute)			
bar (at gauge)				bar absolute			
°C (degrees Celsius)				K (degees Kelvin)			
°F (degrees Fahrenheit)				°R (degrees Rankine)			
to obtain ←				← To			
subtract							

All data, subject to technical changes, are only for information and not for official use.

TEMPERATURE CONVERSION

FAHRENHEIT AND CENTIGRADE

VALVOSIDER
MANUFACTURER OF VALVES

°C	°C ^(a) → ← °F	°F	°C	°C ^(a) → ← °F	°F	°C	°C ^(a) → ← °F	°F	°C	°C ^(a) → ← °F	°F	°C	°C ^(a) → ← °F	°F
			-17,2	1	33,8	16,1	61	141,8	149	300	572	482	900	1652
			-16,7	2	35,6	16,7	62	143,6	154	310	590	488	910	1670
			-16,1	3	37,4	17,2	63	145,4	160	320	608	493	920	1688
			-15,6	4	39,2	17,8	64	147,2	166	330	626	499	930	1706
			-15,0	5	41,0	18,3	65	149,0	171	340	644	504	940	1724
			-14,4	6	42,8	18,9	66	150,8	177	350	662	510	950	1742
			-13,9	7	44,6	19,4	67	152,6	182	360	680	516	960	1760
			-13,3	8	46,4	20,0	68	154,4	188	370	698	521	970	1778
			-12,8	9	48,2	20,6	69	156,2	193	380	716	527	980	1796
			-12,2	10	50,0	21,1	70	158,0	199	390	734	532	990	1814
			-11,7	11	51,8	21,7	71	159,8	204	400	752	538	1000	1832
-273	-459,4		-11,1	12	53,6	22,2	72	161,6	210	410	770	549	1020	1868
-268	-450		-10,6	13	55,4	22,8	73	163,4	216	420	788	560	1040	1904
-262	-440		-10,0	14	57,2	23,3	74	165,2	221	430	806	571	1060	1940
-257	-430		-9,4	15	59,0	23,9	75	167,0	227	440	824	582	1080	1976
-251	-420		-8,9	16	60,8	24,4	76	168,8	232	450	842	593	1100	2012
-246	-410		-8,3	17	62,6	25,0	77	170,6	238	460	860	604	1120	2048
-240	-400		-7,8	18	64,4	25,6	78	172,4	243	470	878	616	1140	2084
-234	-390		-7,2	19	66,2	26,1	79	174,2	249	480	896	627	1160	2120
-229	-380		-6,7	20	68,0	26,7	80	176,0	254	490	914	638	1180	2156
-223	-370		-6,1	21	69,8	27,2	81	177,8	260	500	932	649	1200	2192
-218	-360		-5,6	22	71,6	27,8	82	179,6	266	510	950	660	1220	2228
-212	-350		-5,0	23	73,4	28,3	83	181,4	271	520	968	671	1240	2264
-207	-340		-4,4	24	75,2	28,9	84	183,2	277	530	986	682	1260	2300
-201	-330		-3,9	25	77,0	29,4	85	185,0	282	540	1004	693	1280	2336
-196	-320		-3,3	26	78,8	30,0	86	186,8	288	550	1022	704	1300	2372
-190	-310		-2,8	27	80,6	30,6	87	188,6	293	560	1040	732	1350	2462
-184	-300		-2,2	28	82,4	31,1	88	190,4	299	570	1058	760	1400	2552
-179	-290		-1,7	29	84,2	31,7	89	192,2	304	580	1076	788	1450	2642
-173	-280		-1,1	30	86,0	32,2	90	194,0	310	590	1094	816	1500	2732
-169	-273	-459,4	-0,6	31	87,8	32,8	91	195,8	316	600	1112	843	1550	2822
-168	-270	-454	0,0	32	89,6	33,3	92	197,6	321	610	1130	871	1600	2912
-162	-260	-436	0,6	33	91,4	33,9	93	199,4	327	620	1148	899	1650	3002
-157	-250	-418	1,1	34	93,2	34,4	94	201,2	332	630	1166	927	1700	3092
-151	-240	-400	1,7	35	95,0	35,0	95	203,0	338	640	1184	954	1750	3182
-146	-230	-382	2,2	36	96,8	35,6	96	204,8	343	650	1202	982	1800	3272
-140	-220	-364	2,8	37	98,6	36,1	97	206,6	349	660	1220	1010	1850	3362
-134	-210	-346	3,3	38	100,4	36,7	98	208,4	354	670	1238	1038	1900	3452
-129	-200	-328	3,9	39	102,2	37,2	99	210,2	360	680	1256	1066	1950	3542
-123	-190	-310	4,4	40	104,0	37,8	100	212,0	366	690	1274	1093	2000	3632
-118	-180	-292	5,0	41	105,8	43	110	230	371	700	1292	1121	2050	3722
-112	-170	-274	5,6	42	107,6	49	120	248	377	710	1310	1149	2100	3812
-107	-160	-256	6,1	43	109,4	54	130	266	382	720	1328	1177	2150	3902
-101	-150	-238	6,7	44	111,2	60	140	284	388	730	1346	1204	2200	3992
-96	-140	-220	7,2	45	113,0	66	150	302	393	740	1364	1232	2250	4082
-90	-130	-202	7,8	46	114,8	71	160	320	399	750	1382	1260	2300	4172
-84	-120	-184	8,3	47	116,6	77	170	338	404	760	1400	1288	2350	4262
-79	-110	-166	8,9	48	118,4	82	180	356	410	770	1418	1316	2400	4352
-73	-100	-148	9,4	49	120,2	88	190	374	416	780	1436	1343	2450	4442
-68	-90	-130	10,0	50	122,0	93	200	392	421	790	1454	1371	2500	4532
-62	-80	-112	10,6	51	123,8	99	210	410	427	800	1472	1399	2550	4622
-57	-70	-94	11,1	52	125,6	100	212	414	432	810	1490	1427	2600	4712
-51	-60	-76	11,7	53	127,4	104	220	428	438	820	1508	1454	2650	4802
-46	-50	-58	12,2	54	129,2	110	230	446	443	830	1526	1482	2700	4892
-40	-40	-40	12,8	55	131,0	116	240	464	449	840	1544	1510	2750	4982
-34	-30	-22	13,3	56	132,8	121	250	482	454	850	1562	1538	2800	5072
-29	-20	-4	13,9	57	134,6	127	260	500	460	860	1580	1566	2850	5162
-28	-18	0	14,4	58	136,4	132	270	518	466	870	1598	1593	2900	5252
-23	-10	14	15,0	59	138,2	138	280	536	471	880	1616	1621	2950	5342
-18	0	32	15,6	60	140,0	143	290	554	477	890	1634	1649	3000	5432

The central column (a) represent the know temperature in °C or in °F.

The equivalent temperature in °F or in °C is then read from the column to the right or the left.

General Formula $^{\circ}\text{C} = (^{\circ}\text{F} - 32) \times 5/9$

$^{\circ}\text{F} = (^{\circ}\text{C} \times 9/5) + 32$

All data, subject to technicals changes, are only for information and not for official use.

VALVOSIDER s.r.l. - Via S. Rocco, 2 - P.O. BOX 76 - 13011 Borgosesia (VC) - Italy
Phone: +39016322991 - Fax: +39016321537 - www.valvosider.com - e-mail: valvo@valvosider.com

INCHES	0	1/16	1/8	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16
0	0,00	1,59	3,18	4,76	6,35	7,94	9,53	11,11	12,70	14,29	15,88	17,46	19,05	20,64	22,23	23,81
1	25,40	26,99	28,58	30,16	31,75	33,34	34,93	36,51	38,10	39,69	41,28	42,86	44,45	46,04	47,63	49,21
2	50,80	52,39	53,98	55,56	57,15	58,74	60,33	61,91	63,50	65,09	66,68	68,26	69,85	71,44	73,03	74,61
3	76,20	77,79	79,38	80,96	82,55	84,14	85,73	87,31	88,90	90,49	92,08	93,66	95,25	96,84	98,43	100,01
4	101,60	103,19	104,78	106,36	107,95	109,54	111,13	112,71	114,30	115,89	117,48	119,06	120,65	122,24	123,83	125,41
5	127,00	128,59	130,18	131,76	133,35	134,94	136,53	138,11	139,70	141,29	142,88	144,46	146,05	147,64	149,23	150,81
6	152,40	153,99	155,58	157,16	158,75	160,34	161,93	163,51	165,10	166,69	168,28	169,86	171,45	173,04	174,63	176,21
7	177,80	179,39	180,98	182,56	184,15	185,74	187,33	188,91	190,50	192,09	193,68	195,26	196,85	198,44	200,03	201,61
8	203,20	204,79	206,38	207,96	209,55	211,14	212,73	214,31	215,90	217,49	219,08	220,66	222,25	223,84	225,43	227,01
9	228,60	230,19	231,78	233,36	234,95	236,54	238,13	239,71	241,30	242,89	244,48	246,06	247,65	249,24	250,83	252,41
10	254,00	255,59	257,18	258,76	260,35	261,94	263,53	265,11	266,70	268,29	269,88	271,46	273,05	274,64	276,23	277,81
11	279,40	280,99	282,58	284,16	285,75	287,34	288,93	290,51	292,10	293,69	295,28	296,86	298,45	300,04	301,63	303,21
12	304,80	306,39	307,98	309,56	311,15	312,74	314,33	315,91	317,50	319,09	320,68	322,26	323,85	325,44	327,03	328,61
13	330,20	331,79	333,38	334,96	336,55	338,14	339,73	341,31	342,90	344,49	346,08	347,66	349,25	350,84	352,43	354,01
14	355,60	357,19	358,78	360,36	361,95	363,54	365,13	366,71	368,30	369,89	371,48	373,06	374,65	376,24	377,83	379,41
15	381,00	382,59	384,18	385,76	387,35	388,94	390,53	392,11	393,70	395,29	396,88	398,46	400,05	401,64	403,23	404,81
16	406,40	407,99	409,58	411,16	412,75	414,34	415,93	417,51	419,10	420,69	422,28	423,86	425,45	427,04	428,63	430,21
17	431,80	433,39	434,98	436,56	438,15	439,74	441,33	442,91	444,50	446,09	447,68	449,26	450,85	452,44	454,03	455,61
18	457,20	458,79	460,38	461,96	463,55	465,14	466,73	468,31	469,90	471,49	473,08	474,66	476,25	477,84	479,43	481,01
19	482,60	484,19	485,78	487,36	488,95	490,54	492,13	493,71	495,30	496,89	498,48	500,06	501,65	503,24	504,83	506,41
20	508,00	509,59	511,18	512,76	514,35	515,94	517,53	519,11	520,70	522,29	523,88	525,46	527,05	528,64	530,23	531,81
21	533,40	534,99	536,58	538,16	539,75	541,34	542,93	544,51	546,10	547,69	549,28	550,86	552,45	554,04	555,63	557,21
22	558,80	560,39	561,98	563,56	565,15	566,74	568,33	569,91	571,50	573,09	574,68	576,26	577,85	579,44	581,03	582,61
23	584,20	585,79	587,38	588,96	590,55	592,14	593,73	595,31	596,90	598,49	600,08	601,66	603,25	604,84	606,43	608,01
24	609,60	611,19	612,78	614,36	615,95	617,54	619,13	620,71	622,30	623,89	625,48	627,06	628,65	630,24	631,83	633,41
25	635,00	636,59	638,18	639,76	641,35	642,94	644,53	646,11	647,70	649,29	650,88	652,46	654,05	655,64	657,23	658,81
26	660,40	661,99	663,58	665,16	666,75	668,34	669,93	671,51	673,10	674,69	676,28	677,86	679,45	681,04	682,63	684,21
27	685,80	687,39	688,98	690,56	692,15	693,74	695,33	696,91	698,50	700,09	701,68	703,26	704,85	706,44	708,03	709,61
28	711,20	712,79	714,38	715,96	717,55	719,14	720,73	722,31	723,90	725,49	727,08	728,66	730,25	731,84	733,43	735,01
29	736,60	738,19	739,78	741,36	742,95	744,54	746,13	747,71	749,30	750,89	752,48	754,06	755,65	757,24	758,83	760,41
30	762,00	763,59	765,18	766,76	768,35	769,94	771,53	773,11	774,70	776,29	777,88	779,46	781,05	782,64	784,23	785,81
31	787,40	788,99	790,58	792,16	793,75	795,34	796,93	798,51	800,10	801,69	803,28	804,86	806,45	808,04	809,63	811,21
32	812,80	814,39	815,98	817,56	819,15	820,74	822,33	823,91	825,50	827,09	828,68	830,26	831,85	833,44	835,03	836,61
33	838,20	839,79	841,38	842,96	844,55	846,14	847,73	849,31	850,90	852,49	854,08	855,66	857,25	858,84	860,43	862,01
34	863,60	865,19	866,78	868,36	869,95	871,54	873,13	874,71	876,30	877,89	879,48	881,06	882,65	884,24	885,83	887,41
35	889,00	890,59	892,18	893,76	895,35	896,94	898,53	900,11	901,70	903,29	904,88	906,46	908,05	909,64	911,23	912,81
36	914,40	915,99	917,58	919,16	920,75	922,34	923,93	925,51	927,10	928,69	930,28	931,86	933,45	935,04	936,63	938,21
37	939,80	941,39	942,98	944,56	946,15	947,74	949,33	950,91	952,50	954,09	955,68	957,26	958,85	960,44	962,03	963,61
38	965,20	966,79	968,38	969,96	971,55	973,14	974,73	976,31	977,90	979,49	981,08	982,66	984,25	985,84	987,43	989,01
39	990,60	992,19	993,78	995,36	996,95	998,54	1000,13	1001,71	1003,30	1004,89	1006,48	1008,06	1009,65	1011,24	1012,83	1014,41
40	1016,00	1017,59	1019,18	1020,76	1022,35	1023,94	1025,53	1027,11	1028,70	1030,29	1031,88	1033,46	1035,05	1036,64	1038,23	1039,81
41	1041,40	1042,99	1044,58	1046,16	1047,75	1049,34	1050,93	1052,51	1054,10	1055,69	1057,28	1058,86	1060,45	1062,04	1063,63	1065,21
42	1066,80	1068,39	1069,98	1071,56	1073,15	1074,74	1076,33	1077,91	1079,50	1081,09	1082,68	1084,26	1085,85	1087,44	1089,03	1090,61
43	1092,20	1093,79	1095,38	1096,96	1098,55	1100,14	1101,73	1103,31	1104,90	1106,49	1108,08	1109,66	1111,25	1112,84	1114,43	1116,01
44	1117,60	1119,19	1120,78	1122,36	1123,95	1125,54	1127,13	1128,71	1130,30	1131,89	1133,48	1135,06	1136,65	1138,24	1139,83	1141,41
45	1143,00	1144,59	1146,18	1147,76	1149,35	1150,94	1152,53	1154,11	1155,70	1157,29	1158,88	1160,46	1162,05	1163,64	1165,23	1166,81
46	1168,40	1169,99	1171,58	1173,16	1174,75	1176,34	1177,93	1179,51	1181,10	1182,69	1184,28	1185,86	1187,45	1189,04	1190,63	1192,21
47	1193,80	1195,39	1196,98	1198,56	1200,15	1201,74	1203,33	1204,91	1206,50	1208,09	1209,68	1211,26	1212,85	1214,44	1216,03	1217,61
48	1219,20	1220,79	1222,38	1223,96	1225,55	1227,14	1228,73	1230,31	1231,90	1233,49	1235,08	1236,66	1238,25	1239,84	1241,43	1243,01
49	1244,60	1246,19	1247,78	1249,36	1250,95	1252,54	1254,13	1255,71	1257,30	1258,89	1260,48	1262,06	1263,65	1265,24	1266,83	1268,41
50	1270,00	1271,59	1273,18	1274,76	1276,35	1277,94	1279,53	1281,11	1282,70	1284,29	1285,88	1287,46	1289,05	1290,64	1292,23	1293,81

All data, subject to technical changes, are only for information and not for official use.

1. Offers are made without obligation; orders are to be considered accepted only after our order acknowledgement.
2. Order are not cancellable except with our consent, and then upon terms which indemnify us against loss.
3. Prices are for delivery ex our works in Borgosesia. All transportation charges, insurance, customs charges, special packing or other fees will be at customer's expense.
4. We are not responsible for delays in delivery or defaults in completing a contract due to strikes, work stoppages, fires, floods, accident, inability to obtain materials, fuel, transportation or other causes beyond our control. No penalty is due if not written in the contract.
5. All claims for shortages, corrections or deductions must be made within 30 days after receipt of the goods. Responsibility for goods lost or damaged in transit, rests with carrier, and claims should be filed with the carrier by the consignee and accompanied by the packing list covering the shipment.
6. All amounts invoiced to the customer must be paid without rebate, deduction or set-off. The customer shall never have the right to suspend its obligations.
7. The customer owes, without any further notice of default, interest equal to the statutorily prescribed rate of interest applying in Italy at the time, on all amounts that have not been paid by the last day of the term for payment at the latest.
8. We reserve the right to change or modify the design and construction of any product without incurring any obligation to supply or substitute or modify materials previously sold.
9. Before shipment the goods are carefully tested. Valvosider guarantees its product against defect in material and workmanship for a period of time up to one year from the date of shipment, where such product is used in a service for which it is recommended. Valvosider's obligation under warranty is limited to repair of the product, f.o.b. factory, or replacement of any part or parts having defects in material or workmanship. The buyer shall permit Valvosider to inspect the product so that it may determine its obligation, if any.
10. Valvosider is not responsible for any other damages, whatsoever, in connection with replacement, repair, or refund as set forth above, said obligations and remedies to be sole warranty given hereunder. No warranty shall apply to any product which is modified or changed in design or function after leaving the Valvosider's factory.
11. Catalogue pictures have only to show different types of product, but we don't undertake to carry out exactly details, to which we reserve to introduce changes and improvements according to our experience.
12. In case of controverse only the judicial authorities of the Vercelli (Italy) law-court are competent.

Disclaimer

All the information provided by this catalogue shall be considered "as they are" and Valvosider srl gives no kind of warranty with regards to the subject matter or accuracy of the information contained herein. Valvosider srl specifically disclaims without limitation all warranties expressed and implied, including all warranties relevant to the use of the products for any particular purpose.

Valvosider srl shall never be liable for any special, incidental, indirect or consequential kind of damage or for any damage whatsoever resulting from loss of use, data, profits, both if advised or not advised about the possibility of damage, and about any theory of liability, arising out, or in connection with the use of the information herein contained.

This publication may include technical inaccuracies or typographical errors. Changes may be periodically made to the information herein.



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

IQNet and its partner
CISQIRINA
hereby certify that the organization
VALVOSIDER S.r.l.

VIA SAN ROCCO 2 13011 BORGOSIESA VC ITALIA
in the following operative units
VIA SAN ROCCO 2 13011 BORGOSIESA VC ITALIA

for the following field of activities
DESIGN AND MANUFACTURE OF INDUSTRIAL VALVES FOR PETROCHEMICAL AND POWER PLANTS

has implemented and maintains a
Quality Management System
which fulfills the requirements of the following standard
ISO 9001:2000

Registration Number: **IT-2573**

First issue: 1992-01-27

Current issue: 2004-02-18



Fabio Roveri
President of IQNet



Giovanni Prati
President of CISQ

IQNet partners:

AENOR Spain AFAC France AIB-Vincent International Belgium APCER Portugal CISQ Italy CQC China
CQM Class CQS Czech Republic DQS Germany DS Denmark ELOT Greece FCAV Brazil FONDORISMA Ecuador
HQQA Hong Kong ISONTEC Colombia IRAM Argentina IQA Japan IKMA Netherlands KTO Korea MSST Hong
Kong Nordin Certification Norway NSAI Ireland OQS Austria PCBC Poland PSB Certification Singapore QMI Canada
SAS Global Australia SFS Finland SII Finland SQA Slovenia SQS Switzerland SRAAC Romania TEST de Prentburg Basia
IQNet is represented in the USA by the following partners: AFAC, AIB-Vincent International, CISQ, DQS, IKMA, NSAI, QMI and SAI GI
*The list of IQNet partners is valid at the time of issue of this certificate. Updated information is available under www.iqnet-certification.com



Stoomwezen BV
a member of the LR Group
Central Appraisal Department
P.O. Box 769
3000 AZ Rotterdam
Phone: 031 10 - 3014200
Telefax: 031 10 - 4117380

Valvosider Srl
Cas. Post. 76
13011 Borgosesia (VC)
Italy
Attn. Mr. P.L. Moretta

Subject
Prostitution of Valvosider Srl according M 0809 of the Dutch
"Rules for Pressure Vessels"

Dear Mr. Moretta,
Herewith we inform you, that based on the supplied information, your company

VALVOSIDER SRL
13011 BORGOSIESA (VC), ITALY

is considered to be able to manufacture:

Valves, gate, globe, check

that fulfill the requirements of the sheet M 0809 and the sheets from the Dutch Rules for Pressure Vessels
that are referred to.

Based on the above mentioned company will be listed on the M 0809 list for a period until:

December 31st, 2004.

Until that moment this notification serves as evidence of acceptance according M 0809 of the Dutch
"Rules for Pressure Vessels".

Kind regards,

R. Bambach
Department CBA/Sector Safety

Stoomwezen BV, Weena Zuid 168, 1012 CR Rotterdam

Valvosider srl and its partner Stoomwezen BV are subject to our general terms and conditions listed with the Dutch Council in the County Council of
Rotterdam under No. 40790 dated 27-10-1999. Stoomwezen BV is registered with the Chamber of Commerce and Industries under No. 247888

CERTIFICATE

FOR MANUFACTURER ACCORDING TO
AD 2000-MERKBLATT HP 0 / AD 2000 A4

We hereby certify that the company

Valvosider S.R.L., Via San Rocco, 2 I- 13011 Borgosesia (VC)

has been approved according to AD 2000-Merkblatt HP 0 / AD 2000 A4.

The scope of this approval and other details are
described in our technical Report No. 138349 dated 12.02.2004.
All requirements are met.

Beside others the following main preconditions are given:

- technical equipment for a proper and up-to-date manufacturing and testing,
- quality assurance which assures a correct working and testing of materials according to the Technical Rules,
- qualified supervising and manufacturing personnel.

This approval is valid for 3 years.

Milan, 2004-02-17

TÜV BAYERN HESSEN SACHSEN SÜDWEST E. V.

Bau und Betrieb

Industrialdivision
BB / Milan Office

Certificate of Authority to use the Official API Monogram
License Number: 609-0020 ORIGINAL

The American Petroleum Institute hereby grants to

VALVOSIDER S.R.L.
Via San Rocco, 2
Borgosesia, Verello, Italy

the right to use the Official API Monogram on manufactured products under the conditions in the official
publications of the American Petroleum Institute entitled API Spec Q1 and API Standard 609
and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used in conjunction with the
certificate number: 609-0020

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram
for any reason satisfactory to the Board of Directors of the American Petroleum Institute.
The scope of this license includes the following product: Ball Valve Steel Gas Valves

Effective Date: JULY 26, 2004
Expiration Date: MAY 3, 2005

American Petroleum Institute
Director of Certification Programs

Certificate of Authority to use the Official API Monogram
License Number: 6D-0166 ORIGINAL

The American Petroleum Institute hereby grants to

VALVOSIDER SRL
Borgosesia, Verello, Italy

the right to use the Official API Monogram on manufactured products under the conditions in the official
publications of the American Petroleum Institute entitled API Spec Q1 and API Spec 6D
and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used in conjunction with the
certificate number: 6D-0166

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram
for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following product: Gas Valves: Check Valves

Effective Date: MAY 3, 2002
Expiration Date: MAY 3, 2005

American Petroleum Institute
Secretary



CERTIFICATE

The Certification Body of
TÜV SÜDDEUTSCHLAND Bau und Betrieb GmbH
(a Pressure Equipment Directive Notified Body)

certifies that

Valvosider Srl
Via San Rocco 2
I-13011 Borgosesia (Vc)
Italy

has implemented, operates and maintains a quality system as described in
the Pressure Equipment Directive (97/23/EC) Annex III Module H1

for the scope

MANUFACTURE OF INDUSTRIAL GATE-, GLOBE- and CHECK-
VALVES

Evidence that the quality system satisfies the PED requirements is
documented in Assessment Report, Report No.: I-Q-501-01.

The manufacturer is, therefore, authorized to provide the pressure
equipment manufactured within the scope of the assessed quality system
with the below listed Notified Body identification number (following the
product's CE marking as illustrated).

CE 0036

Certificate No.: DGR-0036-QS-111-01

Mannheim, February 12, 2001

TÜV SÜDDEUTSCHLAND
Bau und Betrieb GmbH
D-68167 Mannheim

Tel.: (0621) 621 39 32 27
Fax: (0621) 621 39 55 94

Notified Body No.: 0036

Member of
CONFEDERATION EUROPEENNE

CEOC

ORGANISMES DE CONTROLE

СИСТЕМА СЕРТИФИКАЦИИ ГОСТ Р
ГОСТСТАНДАРТ РОССИИ

СЕРТИФИКАТ СООТВЕТСТВИЯ

№ РОСС ИТ.Н003.В00622

Срок действия с 15.10.01 г. по 15.10.04 г.

№4786697 *



Орган по сертификации рег. в РОСС RU.0001.11H003

Аккредитованное специализированное подразделение по сертификации, изготовлению и подписанию
специальных и нефтяных документов «ТЕХНОСЕРТИФИКАТ» (Орган по сертификации сырья,
материалов, машин и оборудования для нефтяного комплекса)
109000, Москва, Таганский переулок, д. 9, стр. 4 (119991, Москва, Ленинский проспект, 43)
телефон/факс (095) 135-79-26, 930-90-43

ПРОДУКЦИЯ

Затворы шаровые Ду5350 мм, Ру542 МПа

Серийное производство

код ОК 005 (ОКЕ):

37 4240

СООТВЕТСТВУЕТ ТРЕБОВАНИЯМ НОРМАТИВНЫХ ДОКУМЕНТОВ

ГОСТ 12.2.063

ГОСТ 9544

ИД 08-200-98

код ТН ВЕД, Россия:

8481 80 990 0

ИЗГОТОВИТЕЛЬ

VALVOSIDER S.R.L.

Via San Rocco, 2 - 13011, Borgosesia (Vc), Italy

СЕРТИФИКАТ ВЫДАН

VALVOSIDER S.R.L.

Via San Rocco, 2 - 13011, Borgosesia (Vc), Italy

НА ОСНОВании

Протокола испытаний № 01/110 от 08.10.01 г. Испытательного центра
средств автоматизации газовых систем (ИИС ГАЭС), Россия, 113405,
г. Москва, ул. Тагановская, 42, рег. в РОСС RU.0001.22T04 до 13.07.06 г.
Сертификата систем качества ISO 9001, рег. в ИТ-2573,
изданный ИИИТ и СИ/СИ/ИИИТ
Сертификата Американского Нефтяного Института (API), рег. в 6D-0166
Акта анализа состояния производства от 28.09.01 г.

ДОПОЛНИТЕЛЬНАЯ ИНФОРМАЦИЯ

Знак соответствия по ГОСТ Р 50460 наносится на корпус изделия

и вносится в документацию

Схема сертификации - За

Руководитель органа

Эксперт

Срок действия знака

Срок действия знака

В.Я. Кершенбаум

генеральный директор

А.В. Аванесов

заместитель директора

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака

Срок действия знака